


maxon A-max

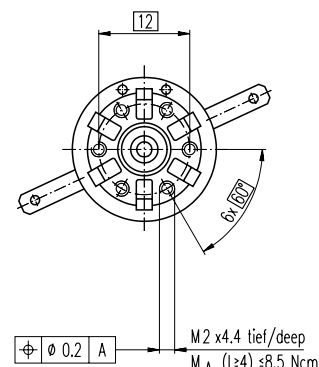

- Order Number**

Specifications

- ## Operating Range



Continuous operation

Continuous operation
In observation of above listed thermal resistances (lines 19 and 20) the maximum permissible rotor temperature will be reached during continuous operation at 25°C ambient.
= Thermal limit

Short term operation

Short term operation
The motor may be briefly overloaded (recurring).

249999 Motor with high resistance winding


— **249992** Motor with low resistance winding

Overview on page 17 - 21

Ø19 mm
 0.1 - 0.3 Nm
 Details page 187

Ø22 mm
0.5 - 2.0 Nm
Details page 190 / 191

Spur Gearhead
Ø24 mm
0.1 Nm
Details page 192



32 CPT,
2 / 3 channels
Details page 210

128 / 256 / 512 CPT,
2 / 3 channels
Details page 211

Digital Encoder
22 mm
100 CPT, 2 channels
Details page 215

- 108 maxon DC motor