
Square Waveform Targets

Table of Contents

Square Wave Functions	1
Row 1: Period of 150-mm (amplitude 30-mm)	1
Row 2: Period of 75-mm (amplitude 15-mm)	2
Row 3: Period of 60-mm to 30-mm (amplitude 10-mm)	3
Row 4: Period of 30-mm to 5-mm (amplitude 5-mm)	4

Square Wave Functions

Max dims of the parts is 406 mmW x 355mm L x 406mm H

```
close all; clear
```

```
x = 0:.1:310;
```

```
% Sinusoid
```

```
y = @(x, lambda, A) -A*cos(2*pi./lambda * x);
```

```
% Chirp
```

```
k = @(lam0, lam1, x) (1/lam1-1/lam0)/(x(end)-x(1)); %freq rate change
```

```
f = @(lam0, lam1, x) (1/lam0) + k(lam0, lam1, x)*x./2;
```

```
fmchirp = @(lam0, lam1, x, A) A * cos(2*pi*f(lam0, lam1, x).*x);
```

Row 1: Period of 150-mm (amplitude 30-mm)

```
lambda = 150;
```


```
A = 30;
```

```
figure(1);
```


```
plot(x, A*sign(y(x, lambda, A)), 'LineWidth', 1);
```

```
axis square equal;
```

```
title(['Row 1 Square: ' num2str(lambda) '-mm \lambda | Amp ' num2str(A) '-mm']);
```

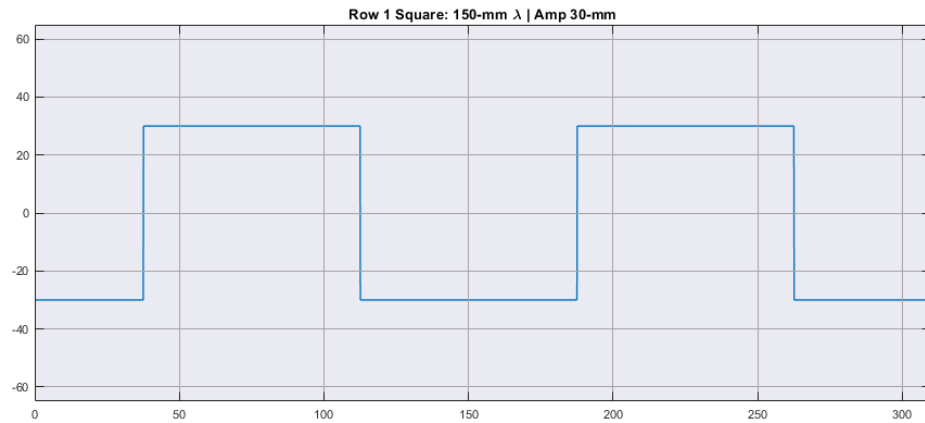


```
axis off;  
title '';  
saveas(gcf, 'squareRow1.svg');
```

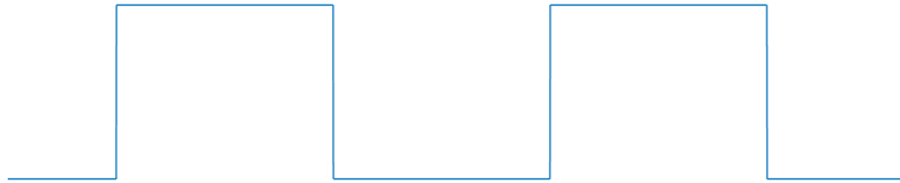

Row 2: Period of 75-mm (amplitude 15-mm)

```
lambda = 75;  
A = 15;  
figure(2);  
plot(x,A*sign(y(x,lambda,A)), 'LineWidth',1);  
axis square equal;  
title(['Row 2 Square: ' num2str(lambda) '-mm \lambda | Amp '  
    num2str(A) '-mm']);  
axis square equal;
```

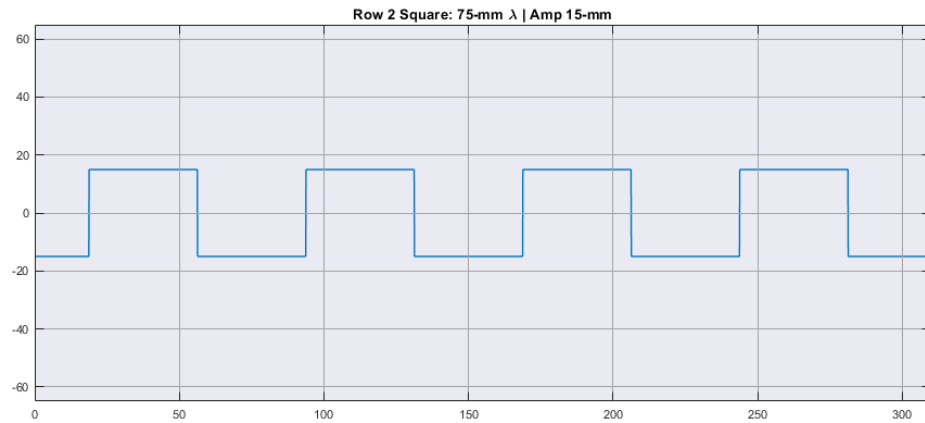


```
axis off;
title '';
saveas(gcf, 'squareRow2.svg');
```



Row 3: Period of 60-mm to 30-mm (amplitude 10-mm)

```
lambda0 = 60;
lambda1 = 30;
A = 10;
figure(3)
plot(x, -A*sign(fmchirp(lambda0,lambda1,x,A)), 'LineWidth',1);
title(['Row 3 Square: \lambda=' num2str(lambda0) '-mm to '
      num2str(lambda1) '-mm | Amp ' num2str(A) '-mm']);
axis square equal;
```

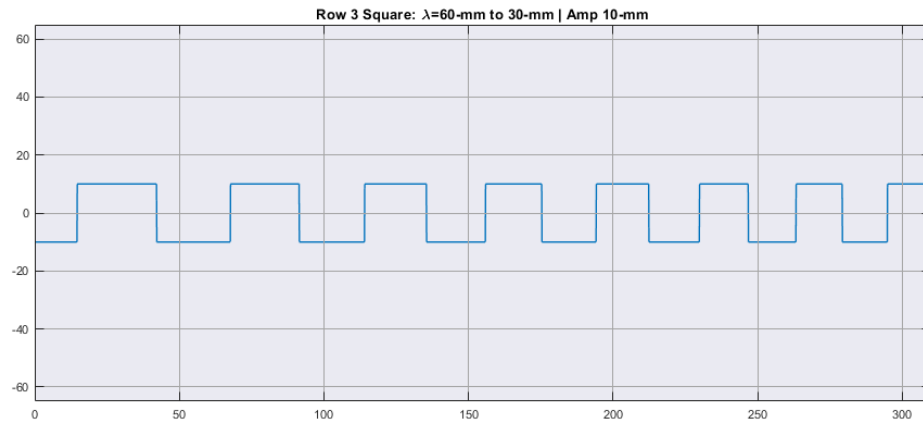


```
axis off;
title '';
saveas(gcf, 'squareRow3.svg');
```



Row 4: Period of 30-mm to 5-mm (amplitude 5-mm)

```
lambda0 = 30;
lambda1 = 5;
A = 5;
figure(4);
plot(x, -A*sign(fmchirp(lambda0,lambda1,x,A)), 'LineWidth',1);
title(['Row 4 Square: \lambda=' num2str(lambda0) '-mm to '
    num2str(lambda1) ' mm | Amp ' num2str(A) '-mm']);
axis square equal;
```

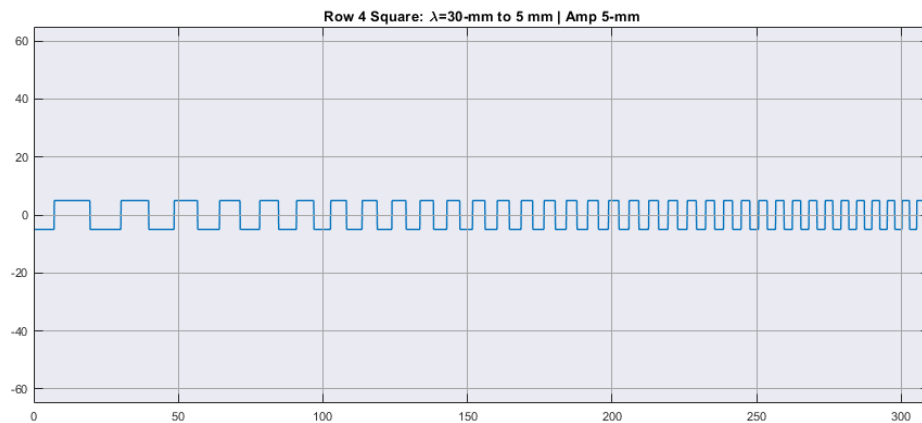

```
axis off;  
title '';  
saveas(gcf, 'squareRow4.svg');
```



Published with MATLAB® R2017b