




Locking Circuit Board Supports

- Both ends lock by hand; no tools required
- Strong, dependable grip
- Material: Nylon 6/6
- Color: Natural




Dim. A (mm)	Digi-Key Part No.	10	100	500	1,000	Richco Part No.
4.57	RP425-ND	2.19	18.24	72.96	109.44	LCBS-3
6.35	RP426-ND	2.33	19.41	77.62	116.43	LCBS-4
9.40	RP428-ND	2.45	20.38	81.50	122.25	LCBS-6
10.92	RP429-ND	2.54	21.20	84.78	127.17	LCBS-7
12.70	RP430-ND	2.63	21.92	87.66	131.49	LCBS-8
15.75	RP431-ND	2.81	23.44	93.76	140.64	LCBS-10
19.05	RP432-ND	3.00	24.99	99.96	149.94	LCBS-12
25.40	RP434-ND	3.37	28.10	112.40	168.60	LCBS-16

Wire Saddle

Wire Saddles are ideal for routing wires or optical fiber. Wires can be easily inserted into the top side of the saddle to protect them from abrasion. The "micro" is ideal for low profile applications and takes up very little real estate.

The MOFNSA is designed to snap into a .125" diameter hole in a .093" thick panel for applications that require a thicker board than the standard 1/16" board.

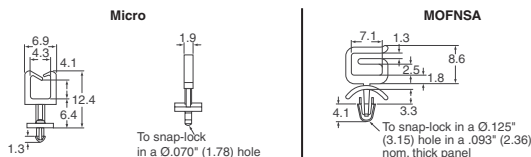

Hole Dim. Inch (mm)	Panel Thick. Inch (mm)	Digi-Key Part No.	10	100	500	Richco Part No.
Standoff Micro Wire Saddle						
.070 (1.75)	.062 (1.57)	RP738-ND	3.12	26.01	104.04	SMWS-1-01
.070 (1.75)	.093 (2.36)	RP739-ND	3.12	26.01	104.04	SMWS1-1-01
Mini Optical Fiber Network Saddle						
.125 (3.18)	.093 (2.36)	RP737-ND	2.49	20.77	83.06	MOFNSA-2-01

Twist-Lok (TL Series)


- Twist to secure wire bundles
- Material: Nylon 6/6, RMS-01
- Color: Natural



"A" Overall Hgt. (mm)	"B" Wire Bundle Dia. (mm)	Digi-Key Part No.	25	100	1,000	Richco Part No.
22.86	5.08-7.62	RP600-ND	2.67	9.14	54.83	TL-250
26.16	7.62-10.16	RP601-ND	2.85	9.77	58.64	TL-350
30.48	10.16-12.70	RP602-ND	3.07	10.54	63.22	TL-450
33.78	13.97-16.51	RP603-ND	3.21	11.00	65.99	TL-600
39.37	17.78-20.32	RP604-ND	3.73	12.78	76.68	TL-750
43.18	Max. 25.40	RP605-ND	3.83	13.14	78.84	TL-950
55.63	Max. 30.23	RP606-ND	5.19	17.80	106.78	TL-1125
68.07	Max. 36.58	RP607-ND	6.18	21.18	127.08	TL-1375
74.42	Max. 39.62	RP608-ND	7.67	26.29	157.75	TL-1500
87.63	Max. 45.97	RP609-ND	8.13	27.88	167.29	TL-1750

Kurly-Lok On Base (KLB Series)


- Adhesive backing, RMS-15
- Material: Nylon 6/6, RMS-01
- Color: Natural



"A" Overall Height (mm)	"B" Wire Bundle Dia. (mm)	Digi-Key Part No.	25	100	1,000	Richco Part No.
27.18	7.62-10.16	RP610-ND	12.04	41.27	247.61	KLB-350A-RT
31.24	10.16-12.70	RP611-ND	13.31	45.63	273.78	KLB-450A-RT
40.13	17.78-20.32	RP612-ND	13.99	47.95	287.71	KLB-750A-RT

Wire Cord Klip (WCK Series)


- Adhesive backing for quick mounting
- Material: Nylon 6/6, RMS-01
- Color: Natural



Description	Digi-Key Part No.	25	100	1,000	Richco Part No.
4.57mm. Dia., w/Tape	RP617-ND	13.31	45.65	273.89	WCK-180-01A-RT
11.43mm. Dia., w/Tape	RP618-ND	23.37	80.13	480.78	WCK-460-01A-RT
18.29mm. Dia., w/Tape	RP619-ND	29.06	99.64	597.82	WCK-720-01A-RT
18.29mm. Dia., w/oTape	RP622-ND	11.87	38.26	329.83	WCK-720-01

Strain Relief Bushings (SRB-D/F/R Series)

- Bushing eliminates strain and wear on wires and cords
- Withstands temperatures to 150°F (65°C)
- Material: Nylon 6/6, RMS-40
- Color: Black
- UL #E40234, CSA #LR52044




Digi-Key Part No.	Approx. Wire Size (mm)	Mntg. Hole (mm) Style A	Mntg. Hole (mm) Style B	Dimensions (mm) C	Dimensions (mm) D	Dimensions (mm) E	Dimensions (mm) F*
RP460-ND	3.05 x 5.59	11.10	10.03	11.68	10.41	4.06	1.57
RP461-ND	2.79 x 5.33 2.29 x 4.57	9.52	8.76	10.79	10.41	3.94	1.57
RP462-ND	4.09 x 7.62 3.81 x 7.11	13.08 12.70	11.81	14.48	12.70	4.34	2.54
RP463-ND	4.06 x 9.40 3.81 x 8.64 5.08 x 9.40 4.57 x 8.89	14.27	13.46	15.49	15.24	6.10	3.30
RP464-ND	4.83 x 7.62 3.81 x 7.11 4.06 x 7.62	12.70	11.58	13.84	10.19	3.61	1.80
RP465-ND	6.35 6.73 7.37 6.86	12.70 13.08 13.08 12.70	11.81	14.22	10.92	4.19	2.54
RP466-ND	8.25 7.62 9.02 8.38	16.66 17.45	14.48	18.45	17.27	6.98	3.18

* Maximum Panel Thickness

Digi-Key Part No.	25	100	1,000	5,000	Richco Part No.
RP460-ND	3.15	10.79	64.73	52.15/M	SRB-D-3
RP461-ND	9.42	32.31	193.86	156.17/M	SRB-F-2
RP462-ND	4.00	13.73	82.37	66.36/M	SRB-F-4
RP463-ND	12.72	43.60	261.61	210.75/M	SRB-F-5
RP464-ND	3.26	11.18	67.10	54.06/M	SRB-F-7
RP465-ND	3.47	11.89	71.35	57.48/M	SRB-R-5
RP466-ND	7.70	26.41	158.44	127.63/M	SRB-R-6
RPSRPL-ND	SRB Pincher Tool			\$95.43/1	SRPL-2

C-Type Flat Cable Clamps (CFCC Series)

- Designed for routing flat ribbon cable
- Serrated grip to prevent slippage
- Adhesive backing for quick mount in any direction
- Material: Noryl-White, RMS-05; PVC-Gray RMS-04




Digi-Key Part No.	Dimensions (mm) A	Dimensions (mm) B	Dimensions (mm) C	Material
RP391-ND	14.27	12.45	4.57	Noryl (White)
RP392-ND	14.27	10.16	6.35	Noryl (White)
RP393-ND	26.97	22.35	6.35	Noryl (White)
RP394-ND	26.97	22.35	6.35	Rigid PVC (Gray)

Digi-Key Part No.	25	100	1,000	Richco Part No.
RP391-ND	11.89	40.76	244.58	CFCC-3-05A-RT
RP392-ND	15.09	51.73	310.39	CFCC-4-05A-RT
RP393-ND	18.83	64.56	387.36	CFCC-8-05A-RT
RP394-ND	14.53	49.80	298.80	CFCC-8-04A-RT

Cable Clamps (N Series)

- Material: Nylon 6/6, RMS-01
- Colors: Natural and Black



Description	Dim. (mm) D	Dim. (mm) E	Digi-Key Part No.	25	100	1,000	Richco Part No.
Black, RMS-49	1.60	6.86	RP322-ND	1.66	5.69	34.16	N-1-BK
Black, RMS-49	3.18	8.33	RP323-ND	1.69	5.81	34.85	N-2-BK
Black, RMS-49	4.78	9.91	RP324-ND	1.94	6.67	40.00	N-3-BK
Black, RMS-49	6.35	10.69	RP325-ND	2.02	6.93	41.58	N-4-BK
Black, RMS-49	7.95	11.51	RP326-ND	2.04	7.00	42.01	N-5-BK
Black, RMS-49	9.52	12.29	RP327-ND	2.22	7.60	45.58	N-6-BK
Black, RMS-49	11.13	11.99	RP328-ND	2.30	7.88	47.30	N-7-BK
Black, RMS-49	12.70	14.27	RP329-ND	2.33	7.98	47.88	N-8-BK
Natural, RMS-01	1.60	6.86	RP314-ND	1.85	6.33	37.98	N-1
Natural, RMS-01	3.18	8.33	RP315-ND	1.88	6.46	38.74	N-2
Natural, RMS-01	4.78	9.91	RP316-ND	2.16	7.40	44.42	N-3
Natural, RMS-01	6.35	10.69	RP317-ND	2.24	7.69	46.15	N-4
Natural, RMS-01	7.95	11.51	RP318-ND	2.27	7.79	46.73	N-5
Natural, RMS-01	9.52	12.29	RP319-ND	2.46	8.45	50.69	N-6-173
Natural, RMS-01	11.13	11.99	RP320-ND	2.56	8.77	52.60	N-7
Natural, RMS-01	12.70	14.27	RP321-ND	2.58	8.86	53.17	N-8

More Product Available Online: www.digikey.com

Toll-Free: 1-800-344-4539 • Phone 218-681-6674 • Fax: 218-681-3380