

ROTASYN Resolver

Admotec patented resolver technology opens fully new applications for rotary sensors. This unique technology is available in standard executions allowing cost effective solutions for small volume applications for new application. Customised design is indicated for large volume applications or for special shape design. The purpose of the leaflet is to give an idea of available Rotasyn resolvers in many different executions.



- **Solid rotor with low inertia**
- **Constant air gap** 1)
- **Insensitive to magnetic stray fields**
- **MTBF doubled** 2)
- **High rotational speed** 3)
- **Flooded rotor applications** 4)
- **Nuclear requirements** 5)
- **Wide-temperature range** 6)

- 1) Less sensitive to excentricity
- 2) Compared to a classical brushless resolvers the Rotasyn has only the half number of windings
- 3) >100'000 rpm for size 15
- 4) With cup around the rotor
- 5) Radiation Dose > 10 9 Rad
- 6) Temperature ranges from -60° to 250°C are possible

Technical Data

Electrical Data			RO2010	RO3620	RO5032	RO7557	RO8565	RO125100
Frequency		[kHz]			10 kHz and Winding E001			
Primary impedance	Zso	[Ω]	94	115	130	160	180	115
Secondary impedance	Zps	[Ω]	51	190	260	290	300	500
Transformation ratio	+/- 5%	[mm]	0.5	0.5	0.5	0.5	0.5	0.4
Mechanical data			Size 08	Size 15	Size 21	Size 30	Size 35	Size 50
Stator OD		[mm]	20	36.83	50	75	85	125
Max Rotor ID		[mm]	4	12	20	42	53	85
Weight		[g]	35	95	200	450	580	830
Rotor length		[mm]	18	18	20	22	22	24
Rotor OD		[mm]	10	20	32	57	65	100
Rotor inertia		[gcm ²]	1	20	140	1286	1721	9010

General Data		
Power Supply	[VAC]	2 to 12 VAC
Frequency	[kHz]	6-12
Shock	[G]	5
Vibrations(10-500Hz) for 0.5h	[G]	10

Influence of Frequency					
	[kHz]	6	8	10	12
Primary Impedance	[%]	90	95	100	200
Secondary impedance	[%]	90	95	100	180
Phase Shift	[°]	+3°	0°	-3°	-15°

Influence of number of poles						
Speed		1	2	3	4	6
Nb. of pole pairs		1	2	4	6	6
Accuracy (mechanical)	[Arcmin]	60	30	15	10	8


Admotec Inc.
85 Mechanic Street
Lebanon NH 03766-1500 USA
Tel +1 603 448 7000 Fax +1 603 448 7007
www.admotec.com

Rotasyn.doc

Admotec Precision AG
Kartausstr.3,
CH 8008 Zürich Switzerland
Tel +41 1 422 22 75 Fax +41 1 42 22 76
www.admotec.ch

Electrical Schematic


Principle of Rotasyn



Unlike the traditional brushless resolver, the Rotasyn has both primary and secondary windings in the stator and thus no transformer is required--the Rotasyn is intrinsically brushless! The transferred energy remains magnetic from the primary coil through the airgap to the sinusoidally shaped poles of the solid rotor.

The Rotasyn is similar to a rotary variable differential rotary transformer (RVDT) in which the rotor acts as a magnetic valve completing the flux path. The total flux through the gap is

constant—the rotor determines the angular position within the stator bore where the coupling occurs, and thus the relative amplitudes of the output signals.

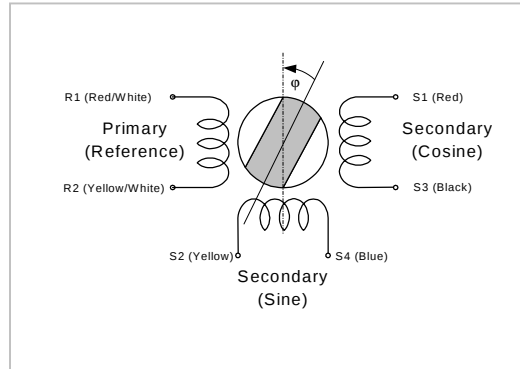

Equations and Definitions


Positive sense of rotation is clockwise when the resolver is seen from the side with the slot on the OD

$$U_{2c} = U_1 \cdot i \cdot \sin(\omega_e t) \cdot \cos \phi$$

$$U_{2s} = U_1 \cdot i \cdot \sin(\omega_e t) \cdot \sin \phi$$


Where:

ϕ	Rotor Angle
ω_e	Excitation Frequency
U_1	Supply Voltage
i	Transformation Ratio
U_{2c}	Cosine Output
U_{2s}	Sine Output

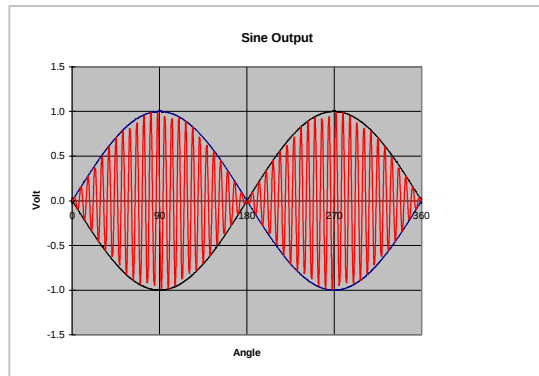


Rotasyn Application

The schematic drawing represents an example of a circuit allowing to use the Rotasyn to get a digital signal of the angle of the rotor. The Oscillator (OSC) and the Resolver to Digital Converters (RDC) are available as commercial chips. Please ask Admotec for more informations.

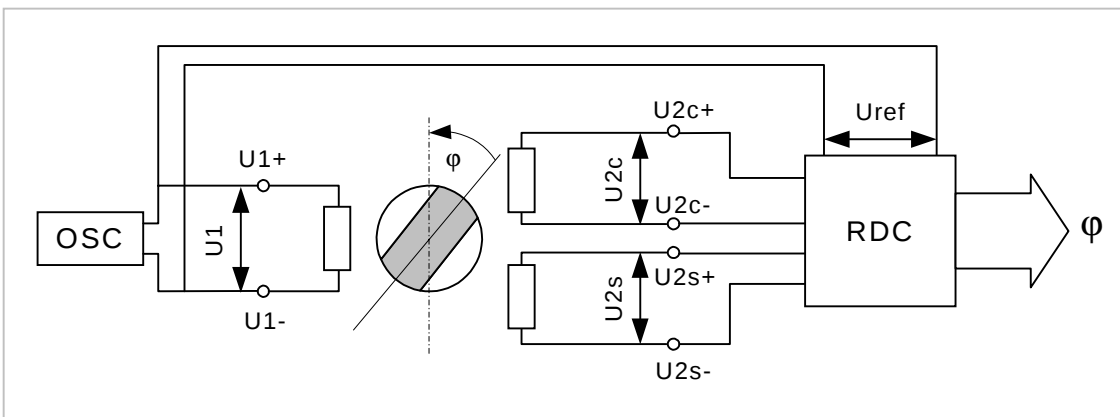

Outline and Mounting



Size 08

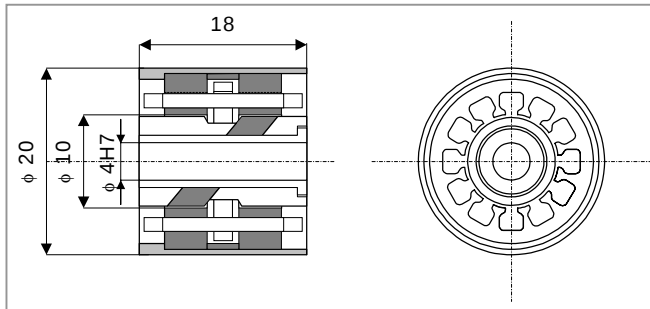


Sizes 30 / 35 / 40 / 50

Lamination Size		Dimensions in mm			
		Size 30	Size 35	Size 40	Size 50
Stator OD	D	75	85	100	125
Lamination OD	a	70	78	92	114
Lamination ID	i	57	65	80	100
Rotor ID	d	45	53	65	85
Length	l	22	22	24	24

Size 15

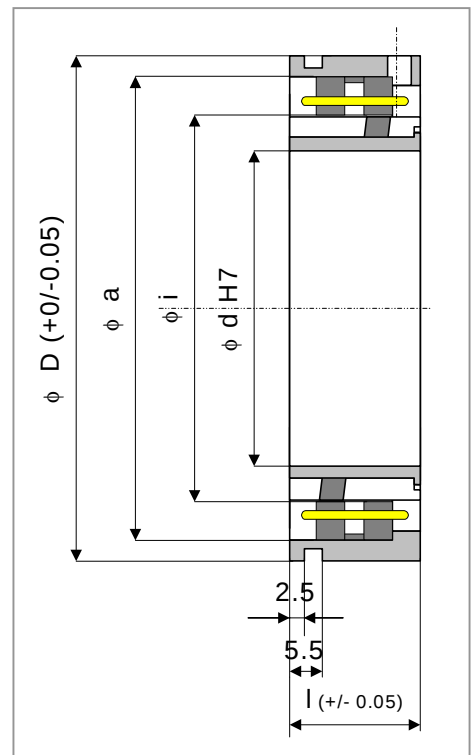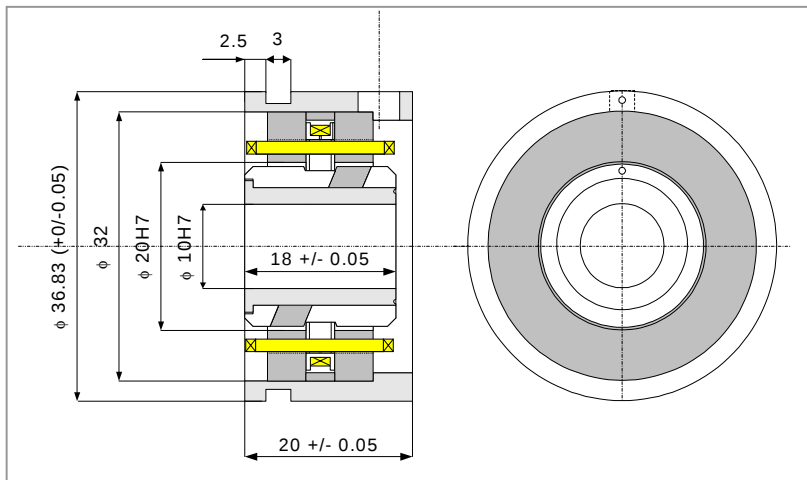

Size 21

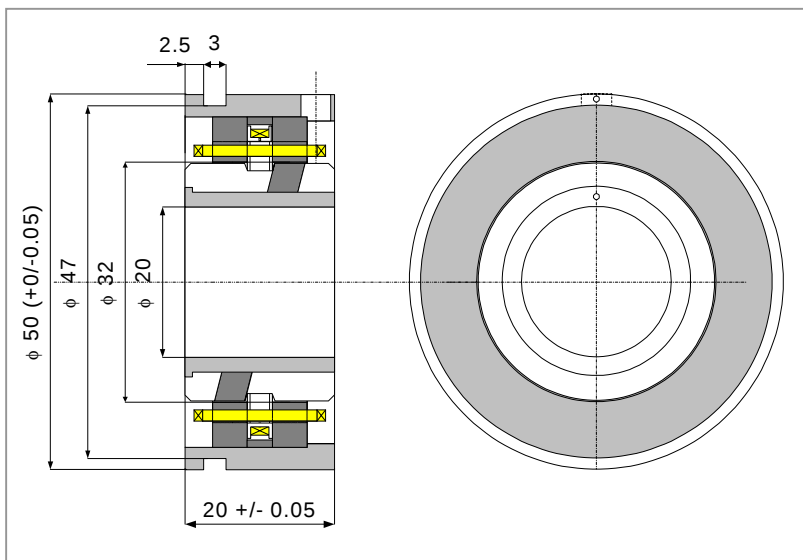

Selection and Ordering Data

Special Executions

Multipole: When higher accuracy is needed and where reduced absolute angle can be accepted. For motor commutation applications for example.

Hi-Rad :Use of special isolation materials for applications in radioactive areas within nuclear plants.




Hi-Temp: Use of special isolation materials resisting to higher temperatures

Hi-speed: Statically and dynamically balanced rotor to insure a vibration free rotation.

Airgap: Standard air gap is 0.3 mm. For special applications it can be increased to max. 1mm. Doing this will reduce the transformation ratio from 0.5 to 0.30

Flooded Rotor: For hydraulic or chemical applications where the liquid is either chemically aggressive or electrically conducting. No rotating seal necessary

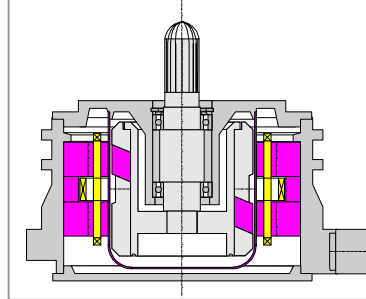

Aerospace

Execution with ATP (Acceptance Test Procedures) and Certificates as required for aerospace applications. Special housing made of titanium to reduce weight

Ordering Data

RO	125	100	/n	M001	E001	R85/0.0
Series: RO Frameless DG With Bearing				Rotor ID / airgap[mm]		
Stator OD [mm]				Winding Design		
Stator ID [mm]				Mechanical Design 001 Standard 00x Custom 100 Aerospace 300 High Speed 500 High Radiation		
Speed [number of pole pairs]						

Standard execution:

Frameless

Airgap 0.3 mm

Temperatures -60° to 155°C

Leads outlets Radial

Transformation ratio 0.5