




Memory Protection Devices

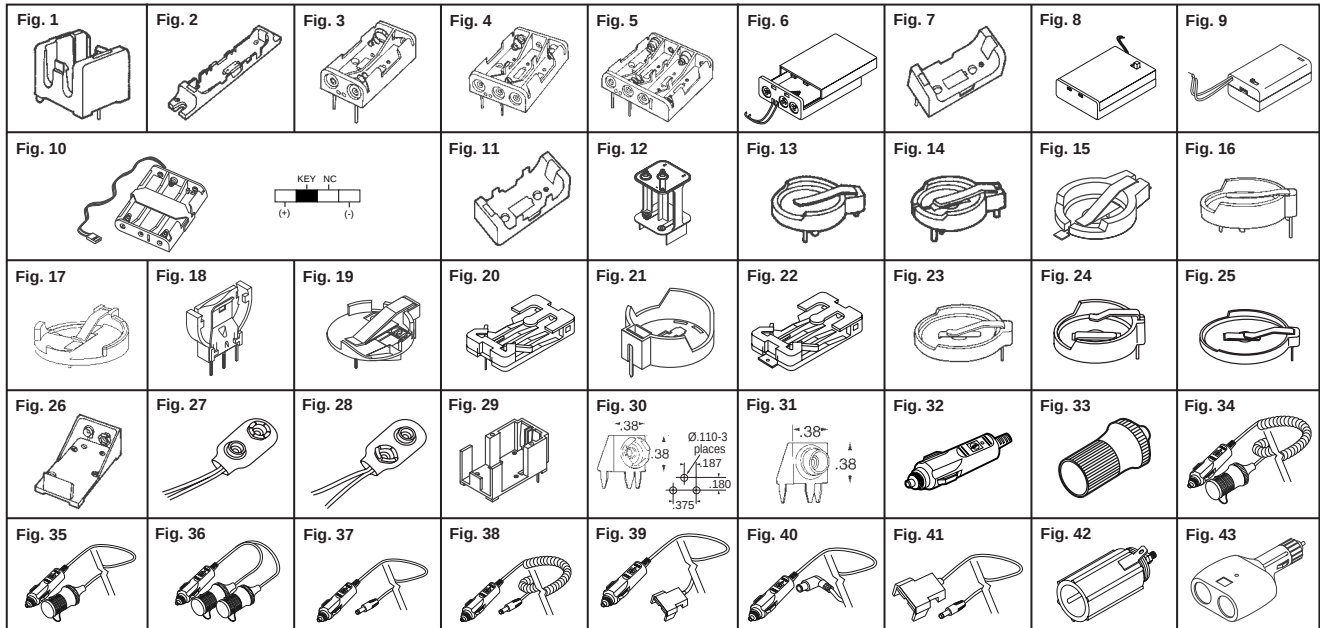

Battery Holders

Fig.	No. of Cells	Description	Digi-Key Part No.	Price Each
1	10	100		
"1/3N" Cell Holders				
1	1	PC Mount, Solder Legs	BC1/3N-ND	.86 .78 .66
"N" Cell Holders				
2	2	PC Mount, Solder Legs	BH2N-ND	1.94 1.75 1.60
"AAA" Cell Holders				
3	2	PC Mount, Solder Legs	BH2AAA-PC-ND	1.35 1.22 1.01
4	3	PC Mount, Solder Legs	BH3AAA-PC-ND	2.24 2.02 1.68
3	2	6" (152.40mm) Wire Leads, Stripped-Tinned .187" (4.76mm)	BH2AAA-W-ND	1.35 1.22 1.01
4	3	6" (152.40mm) Wire Leads, Stripped-Tinned .187" (4.76mm)	BH3AAA-W-ND	2.24 2.02 1.68
5	4	6" (152.40mm) Wire Leads, Stripped-Tinned .187" (4.76mm)	BH4AAA-W-ND	2.49 2.25 1.88
6	3	6" (152.40mm) Wire Leads, Stripped-Tinned .161" (5mm) with Cover	SBH-431A-ND	.83 .75 .63
"AA" Cell Holders				
7	1	PC Mount, Solder Legs	BHAA-2-ND	.73 .66 .60
2	2	PC Mount, Solder Legs	BH2AA-PC-ND	1.42 1.28 1.07
3	3	PC Mount, Solder Legs	BH3AA-PC-ND	2.39 2.16 1.80
4	4	PC Mount, Solder Legs	BH4AA-PC-ND	2.59 2.34 1.95
8	3	Battery Case for 3 AA Cells with 6" Wire Leads and Switch with Belt Clip	SBC331AS-GRN-ND	1.80 1.62 1.50
9	2	Battery Case for 2 AA Cells with 6" Wire Leads and Switch	SBH-321AS-ND	.72 .65 .60
9	3	Battery Case for 3 AA Cells with 6" Wire Leads and Switch	SBH-331AS-ND	1.03 .93 .86
9	4	Battery Case for 4 AA Cells with 6" Wire Leads and Switch	SBH-341AS-ND	1.08 .98 .90
3	2	6" (152.40mm) Wire Leads, Stripped-Tinned .187" (4.76mm)	BH2AA-W-ND	1.42 1.28 1.07
4	3	6" (152.40mm) Wire Leads, Stripped-Tinned .187" (4.76mm)	BH3AA-W-ND	2.39 2.16 1.80
5	4	6" (152.40mm) Wire Leads, Stripped-Tinned .187" (4.76mm)	BH4AA-W-ND	2.59 2.34 1.95
Computer Clock Battery Replacement / "AA" Cell Holder				
10	3	9" Wire Leads w/Conn., Velcro Pads Included	BH3AA-211-ND	3.19 2.88 2.84
"1/2AA" Cell Holders				
7	1	PC Mount, Solder Legs	BH1/2AA-2-ND	.70 .64 .58
"2/3A" Cell Holders				
7	1	PC Mount, Solder Legs	BH2/3A-2-ND	.73 .66 .60
—	1	Cover for PC Mount Holder	BH2/3AC-ND	.59 .53 .45
"C" Cell Holders				
11	1	PC Mount, Solder Legs	BHC-ND	2.02 1.82 1.76
Lantern Battery Replacement — "D" Cell Holders				
12	4	Uses Four UM-1 or D Cells	BA4D-S-ND	2.70 2.44 2.35
NEW! Coin Cell Holders — 10mm Cell Diameter NEW!				
13	1	PC Mount, Solder Legs, 2-2.5mm Cell Height	BH401-ND	.98 .89 .77
Coin Cell Holders — 12.5mm Cell Diameter				
13	1	PC Mount, Solder Legs, 2-2.5mm Cell Height	BH501-ND	1.04 .87 .80
Coin Cell Holders — 16mm Cell Diameter				
14	1	PC Mount, Solder Legs, 1.6-3.2mm Cell Height	BH600-ND	.92 .83 .70
15	1	SMT, Temp. Range -40°C to +245°C	BH600SM-ND	1.13 1.02 .85
Coin Cell Holders — 20mm Cell Diameter				
16	2	PC Mount, Solder Legs, 2.5-3.2mm Cell Height	BH800S-ND	.60 .55 .54
17	1	PC Mount, Solder Legs	BH32T-C-ND	.97 .73 .62

Fig.	No. of Cells	Description	Digi-Key Part No.	Price Each
1	10	100		
18	1	Vertical, for BR, CR2032 Battery	BS-5-ND	.74 .67 .56
19	1	Horizontal, for BR, CR2032 Battery	BS-3-ND	.68 .62 .52
21	1	Horizontal, for 3V Lithium Battery, CR2032 or BR2032	BS-7-ND	.68 .62 .52
22	1	PC Mount, Press-to-Eject Feature, CR2032 Battery	BA2032-ND	.72 .59 .54
22	1	SMT, Press-to-Eject Feature, CR2032 Battery	BA2032SM-ND	.72 .59 .54
Coin Cell Holders — 23mm Cell Diameter				
16	2	PC Mount, Solder Legs, 2.5mm Cell Height	BH906S-ND	1.01 .92 .77
17	1	PC Mount, Solder Legs, 2-3.2mm Cell Height	BH908T-C-ND	.97 .73 .62
Coin Cell Holders — 24-25mm Cell Diameter				
23	1	PC Mount, Solder Legs, 2-3mm Cell Height	BH2430T-C-ND	.89 .81 .70
24	1	PC Mount, Solder Legs, 7.7mm Cell Height	BH1000-G-ND	1.22 1.13 .95
Coin Cell Holders — 30mm Cell Diameter				
25	1	PC Mount, Solder Legs, 3.2mm Cell Height	BH3000-ND	1.22 1.13 .95
9-Volt Cell Holders				
26	1	PC Mount, Solder Legs	BH9V-PC-ND	1.17 1.06 .90
26	1	6" (152.40mm) Lead Wires	BH9V-W-ND	.88 .80 .79
27	1	6" (152.40mm) Battery Snap Cable	BS61-ND	.30 .27 .25
28	1	12" (304.8mm) Battery Snap Cable	BS121-ND	.31 .28 .26
28	1	6" (152.40mm) Heavy Duty Battery Snap Cable	BS61-HD-ND	.33 .31 .28
28	1	12" (304.8mm) Heavy Duty Battery Snap Cable	BS121-HD-ND	.35 .32 .30
29	1	PC Mount, Printed Circuit Board Type w/Contacts	BC9VPC-ND	1.41 1.13 1.02
Printed Circuit Snap-Ons (off board battery mount)				
30	—	9-Volt Female Snap-on	BSPCF-ND	.22 .20 .14
31	—	9-Volt Male Snap-on	BSPCM-ND	.19 .18 .12

Cigarette Lighter Auto Power

- 21 mm (Inside Diameter) • Auto Plugs: (Fuse 3AG Style)
- The length of the cord shown in each item is measured from the welding point

Fig.	Description	Digi-Key Part No.	Price Each
1	10	100	
Auto Power Plug			
32	ABS Fused Auto Plug with LED, Black	APP-001-ND	2.25 2.03 2.00
	ABS Fused Auto Plug with LED, Gray	APP-002-ND	2.25 2.03 2.00
	ABS Fused Auto Plug with No LED, Black	APP-003-ND	2.07 1.86 1.84
Auto Power Assemblies			
33	Cigarette Inline Socket, Plastic	ZA2010-ND	1.13 1.02 1.00
—	Red Rubber Cap for Sockets	ZA2081-ND	.56 .51 .50
34	12" (3.66 meters) Coil Cord Assembly w/5A Fused Plug w/LED	ZA5070-ND	5.84 5.26 5.19
35	12" (3.66 meters) 18AWG Cord Assembly, w/10A Fused Plug w/LED	ZA5071-ND	6.48 5.84 5.76
36	8" (203.2mm) 18AWG Cord Assembly, w/10A Fused Plug w/LED	ZA5072-ND	6.20 5.58 5.51
37	6" (1.83 meters) 18AWG Cord, 2.1mm x 5.5mm DC Plug with 5A Fused Plug with LED	ZA5073-ND	3.85 3.47 3.42
38	12" (3.66 meters) Cord, 2.1mm x 5.5mm DC Plug, with 5A Fused Plug with LED	ZA5074-ND	6.11 5.50 5.42
39	1' (0.30 meters) UL2468 Cord, Lead Acid Clip, with 2A Fused Plug with LED	ZA5076-ND	4.32 3.89 3.84
40	6" (1.83 meters) Cord, 2.1mm x 5.5mm Rt. Angle DC Plug with 3A Fused Plug with LED	ZA5077-ND	3.85 3.47 3.42
41	8" (203.2mm), UL2468 Cord, Lead Acid Clip, 2.1mm x 5.5mm DC Plug	ZA5350-ND	2.91 2.63 2.59
41	8" (203.2mm), UL2468 Cord, Lead Acid Clip, No Connector	ZA5350-B-ND	2.54 2.29 2.25
42	Panel Mount, Power Socket, Insert Lock	ZA2070-ND	3.36 3.00 2.71
42	Panel Mount, Power Socket, Screw Lock	ZA2060-ND	2.60 2.32 2.10
43	Power Plug Splitter, One Male Plug-Two Receptacle Sockets w/LED	ZA5018-ND	6.08 5.50 5.40

More Product Available Online: www.digikey.com