


THIS DOCUMENT IS ISSUED IN STRICT CONFIDENCE
ON CONDITION THAT IT IS NOT COPIED REPRINTED
OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY
OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT
OF SOUTH BAY CABLE CORPORATION.

REVISION		
DESCRIPTION	DATE	APPROVAL

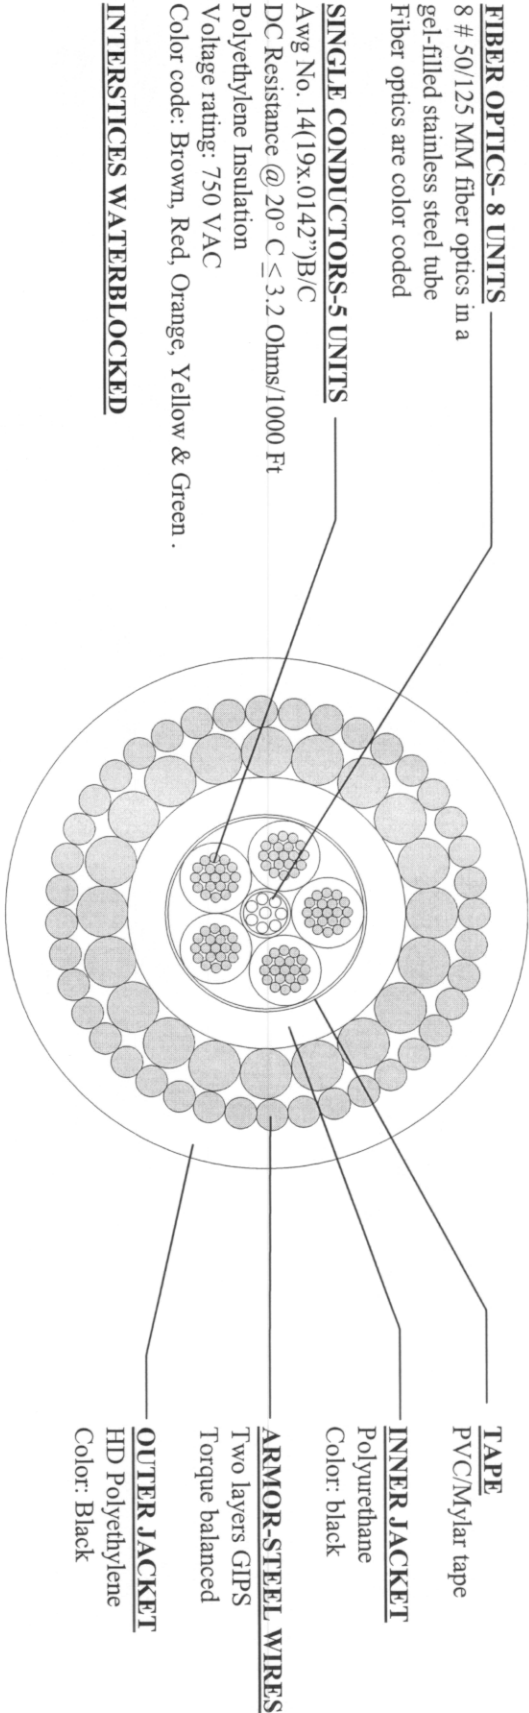

SINGLE CONDUCTORS-5 UNITS
Avg No. 14(19x.0142")B/C
DC Resistance @ 20° C ≤ 3.2 Ohms/1000 Ft
Polyethylene Insulation
Voltage rating: 750 VAC
Color code: Brown, Red, Orange, Yellow & Green.

INTERSTICES WATERBLOCKED

ESTIMATED VALUES

Nominal O.D. ----- 0.720"
Weight in Air ----- 570 Lb/1000 Ft
Weight in Seawater ----- 390 Lb/1000 Ft
Breaking Strength ----- 20,000 Pounds
Maximum Load ----- 5,000 Pounds
Min. Bend Diameter ----- 24 Inches
Temperature Range ----- - 20° C to 70° C

**South Bay
Cable**



Drawn	O.L.	9/30/09	Approval		
Checked	L.L.	9/30/09	Approval		

E-O-M Cable

SB-46827