CoolMOS® Power Transistor

Features

- Worldwide best $R_{ds,on}$ in TO247
- Ultra low gate charge
- Extreme dv/dt rated
- High peak current capability
- Qualified for industrial grade applications according to JEDEC[1)]
- Pb-free lead plating; RoHS compliant

Product Summary

V_{DS} @ T_{jmax}	650	V
$R_{DS(on),max}$	0.045	Ω
$Q_{g,typ}$	150	nC

PG-TO247-3-1



CoolMOS CP is specially designed for:

- Hard switching SMPS topologies



Type	Package	Ordering Code	Marking
IPW60R045CP	PG-TO247-3-1	SP000067149	6R045

Maximum ratings, at T_j=25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	T_C=25 °C	60	A
		T_C=100 °C	38	
Pulsed drain current[2)]	$I_{D,pulse}$	T_C=25 °C	230	
Avalanche energy, single pulse	E_{AS}	I_D=11 A, V_{DD}=50 V	1950	mJ
Avalanche energy, repetitive t_{AR}[2),3)]	E_{AR}	I_D=11 A, V_{DD}=50 V	3	
Avalanche current, repetitive t_{AR}[2),3)]	I_{AR}		11	A
MOSFET dv/dt ruggedness	dv/dt	V_{DS}=0...480 V	50	V/ns
Gate source voltage	V_{GS}	static	±20	V
		AC (f>1 Hz)	±30	
Power dissipation	P_{tot}	T_C=25 °C	431	W
Operating and storage temperature	T_j, T_{stg}		-55 ... 150	°C
Mounting torque		M3 and M3.5 screws	60	Ncm

Maximum ratings, at T_j=25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous diode forward current	I_S	T_C=25 °C	44	A
Diode pulse current[2)]	$I_{S,pulse}$		230	
Reverse diode dv/dt[4)]	dv/dt		15	V/ns

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Thermal characteristics						
Thermal resistance, junction - case	R_{thJC}		-	-	0.29	K/W
Thermal resistance, junction - ambient	R_{thJA}	leaded	-	-	62	
Soldering temperature, wavesoldering only allowed at leads	T_{sold}	1.6 mm (0.063 in.) from case for 10 s	-	-	260	°C
Electrical characteristics, at T_j=25 °C, unless otherwise specified						
Static characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	V_{GS}=0 V, I_D=250 µA	600	-	-	V
Gate threshold voltage	$V_{GS(th)}$	V_{DS}=V_{GS}, I_D=3 mA	2.5	3	3.5	
Zero gate voltage drain current	I_{DSS}	V_{DS}=600 V, V_{GS}=0 V, T_j=25 °C	-	-	10	µA
		V_{DS}=600 V, V_{GS}=0 V, T_j=150 °C	-	50	-	
Gate-source leakage current	I_{GSS}	V_{GS}=20 V, V_{DS}=0 V	-	-	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	V_{GS}=10 V, I_D=44 A, T_j=25 °C	-	0.04	0.045	Ω
		V_{GS}=10 V, I_D=44 A, T_j=150 °C	-	0.11	-	
Gate resistance	R_G	f=1 MHz, open drain	-	1.3	-	Ω

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Dynamic characteristics						
Input capacitance	C_{iss}	V_{GS}=0 V, V_{DS}=100 V, f=1 MHz	-	6800	-	pF
Output capacitance	C_{oss}		-	320	-	
Effective output capacitance, energy related[5)]	$C_{o(er)}$	V_{GS}=0 V, V_{DS}=0 V to 480 V	-	310	-	
Effective output capacitance, time related[6)]	$C_{o(tr)}$		-	820	-	
Turn-on delay time	$t_{d(on)}$	V_{DD}=400 V, V_{GS}=10 V, I_D=44 A, R_G=3.3 Ω	-	30	-	ns
Rise time	t_r		-	20	-	
Turn-off delay time	$t_{d(off)}$		-	100	-	
Fall time	t_f		-	10	-	
Gate Charge Characteristics						
Gate to source charge	Q_{gs}	V_{DD}=400 V, I_D=44 A, V_{GS}=0 to 10 V	-	34	-	nC
Gate to drain charge	Q_{gd}		-	51	-	
Gate charge total	Q_g		-	150	190	
Gate plateau voltage	$V_{plateau}$		-	5.0	-	V
Reverse Diode						
Diode forward voltage	V_{SD}	V_{GS}=0 V, I_F=44 A, T_j=25 °C	-	0.9	1.2	V
Reverse recovery time	t_{rr}	V_R=400 V, I_F=I_S, di_F/dt=100 A/µs	-	600	-	ns
Reverse recovery charge	Q_{rr}		-	17	-	µC
Peak reverse recovery current	I_{rrm}		-	60	-	A

[1)] J-STD20 and JESD22

[2)] Pulse width t_p limited by $T_{j,max}$

[3)] Repetitive avalanche causes additional power losses that can be calculated as P_{AV}=E_{AR}*f.

[4)] I_{SD}≤I_D, di/dt≤100A/µs,V_{DClink} = 400V, Vpeak<$V_{(BR)DSS}$, T_j<T_{jmax}, identical low side and high side switch

[5)] $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 80% V_{DSS}.

[6)] $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80% V_{DSS}.

1 Power dissipation

$P_{tot}=f(T_C)$

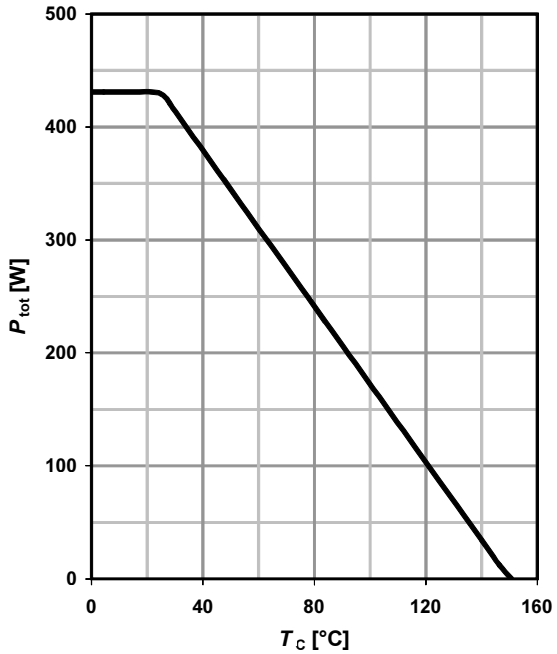

2 Safe operating area

$I_D=f(V_{DS})$; $T_C=25$ °C; $D=0$

parameter: t_p

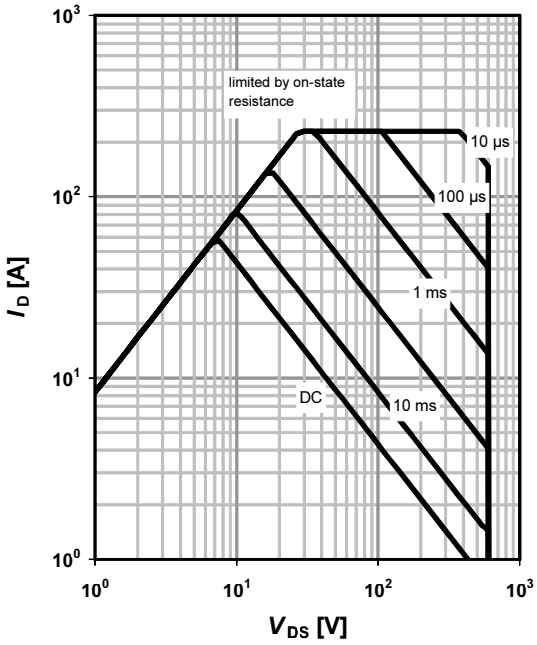

3 Max. transient thermal impedance

$Z_{(thJC)}=f(t_p)$

parameter: $D=t_p/T$

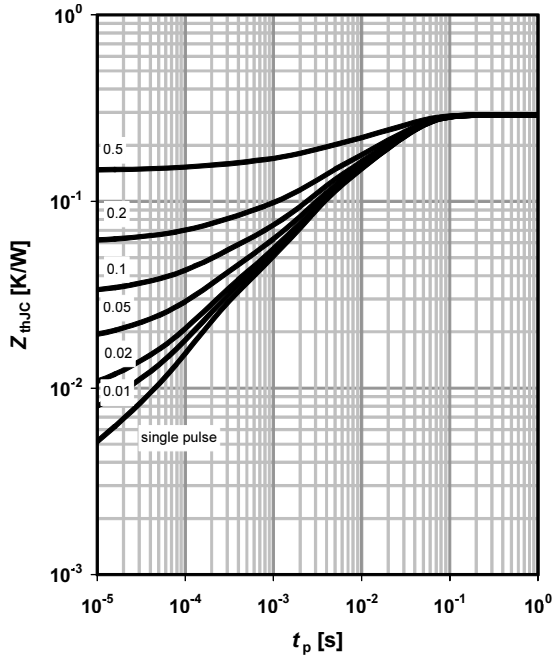

4 Typ. output characteristics

$I_D=f(V_{DS})$; $T_j=25$ °C

parameter: V_{GS}

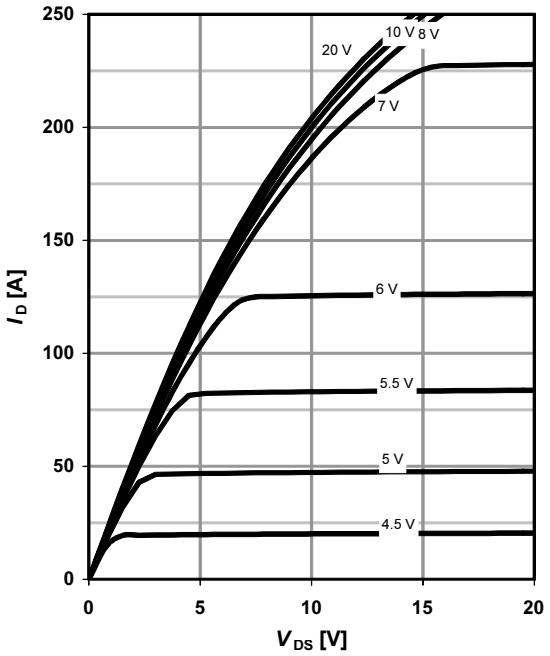

5 Typ. output characteristics

$I_D=f(V_{DS})$; $T_j=150$ °C

parameter: V_{GS}

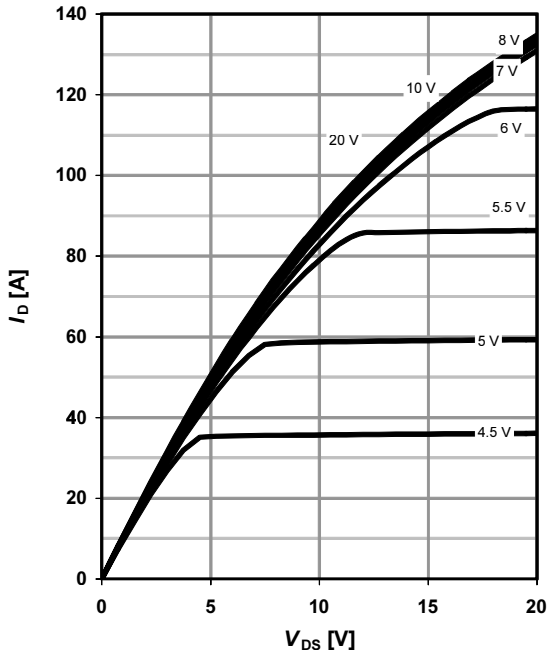

6 Typ. drain-source on-state resistance

$R_{DS(on)}=f(I_D)$; $T_j=150$ °C

parameter: V_{GS}

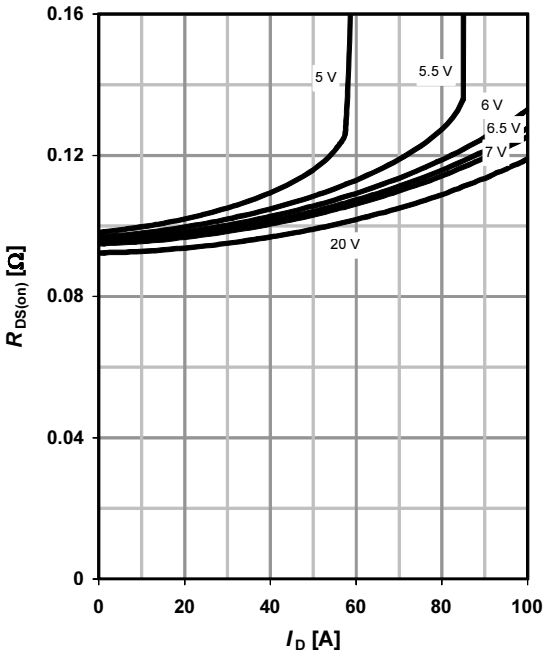

7 Drain-source on-state resistance

$R_{DS(on)}=f(T_j)$; $I_D=44$ A; $V_{GS}=10$ V

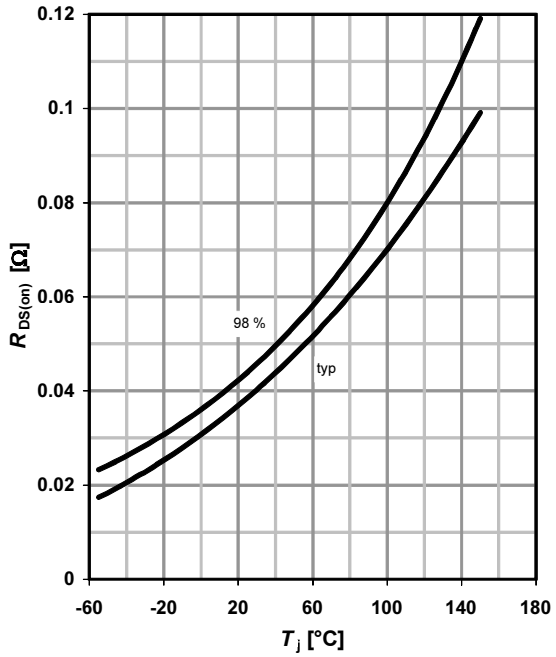

8 Typ. transfer characteristics

$I_D=f(V_{GS})$; $|V_{DS}|>2|I_D|R_{DS(on)max}$

parameter: T_j

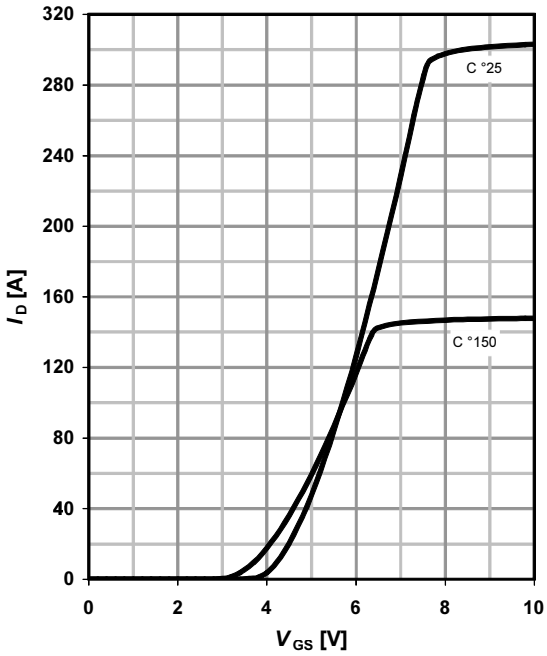

9 Typ. gate charge

V_{GS}=f(Q_{gate}); I_D=44 A pulsed

parameter: V_{DD}

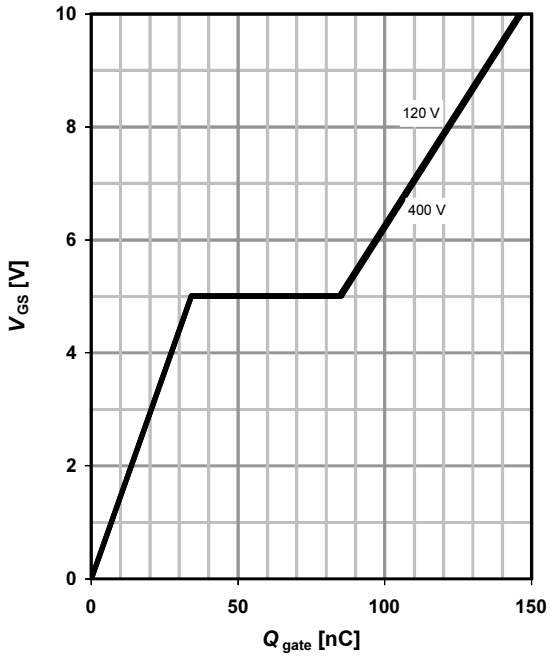

10 Forward characteristics of reverse diode

I_F=f(V_{SD})

parameter: T_j

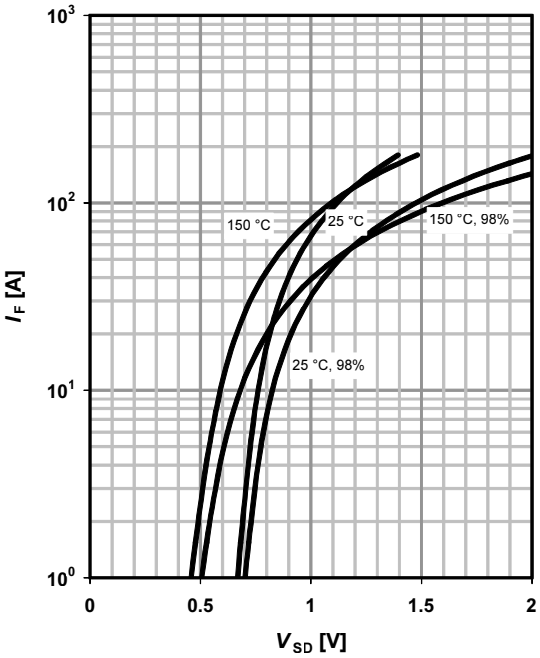

11 Avalanche energy

E_{AS}=f(T_j); I_D=11 A; V_{DD}=50 V

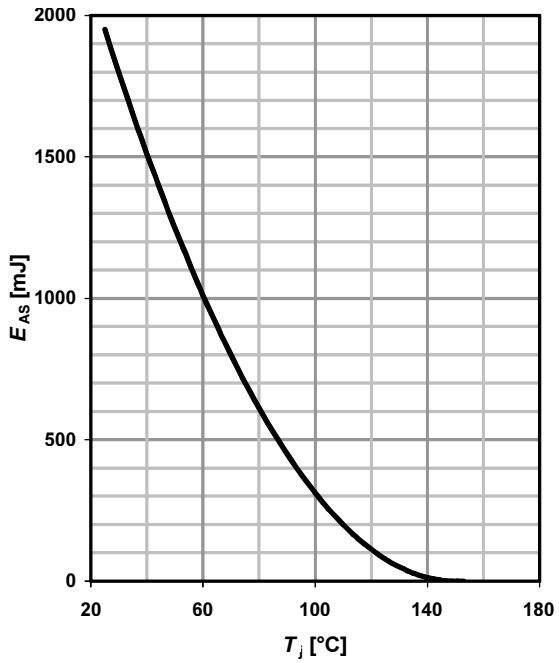

12 Drain-source breakdown voltage

$V_{BR(DSS)}$=f(T_j); I_D=0.25 mA

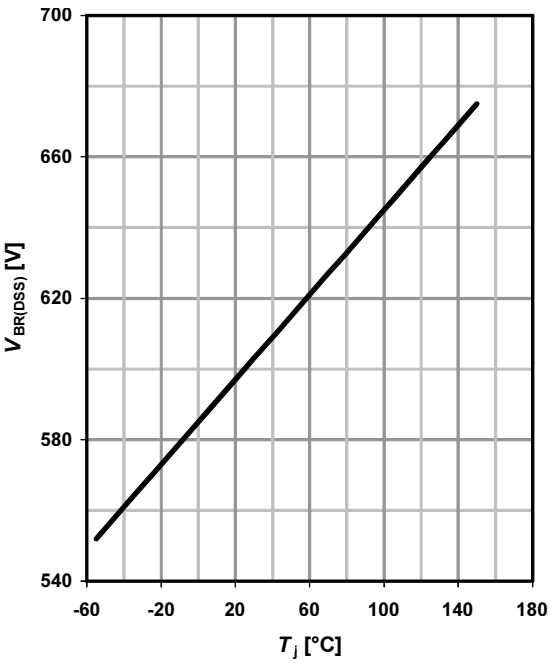

13 Typ. capacitances

C=f(V_{DS}); V_{GS}=0 V; f=1 MHz

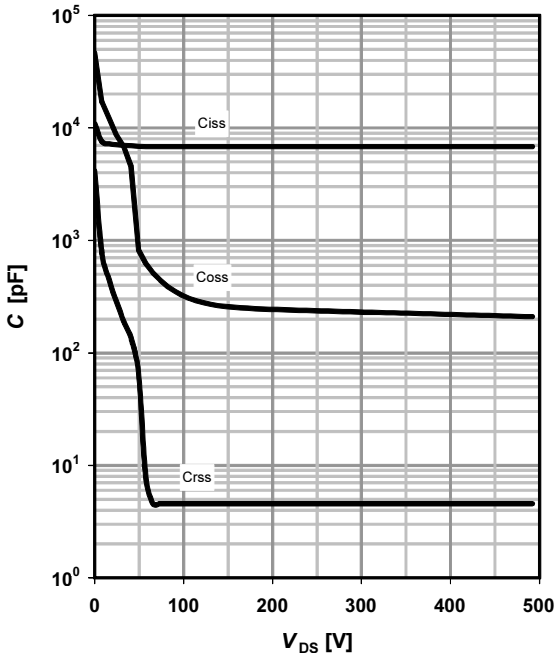

14 Typ. Coss stored energy

E_{oss}= f(V_{DS})

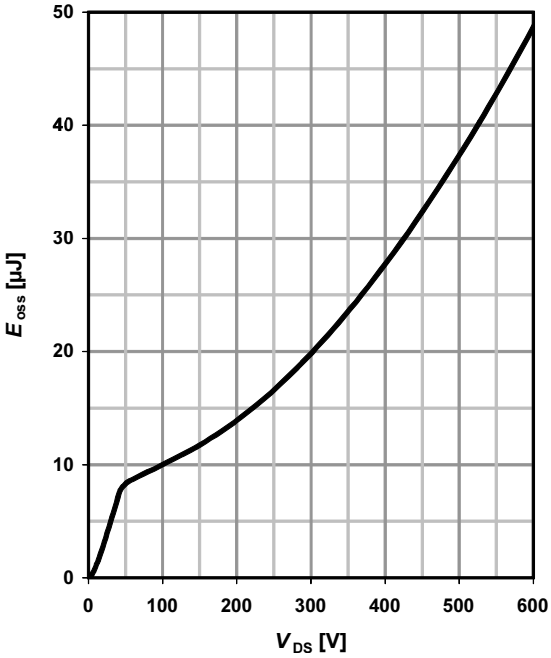

Definition of diode switching characteristics

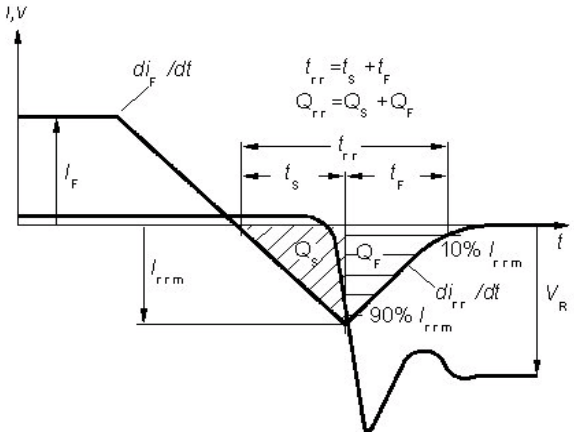

PG-TO-247-3: Outlines

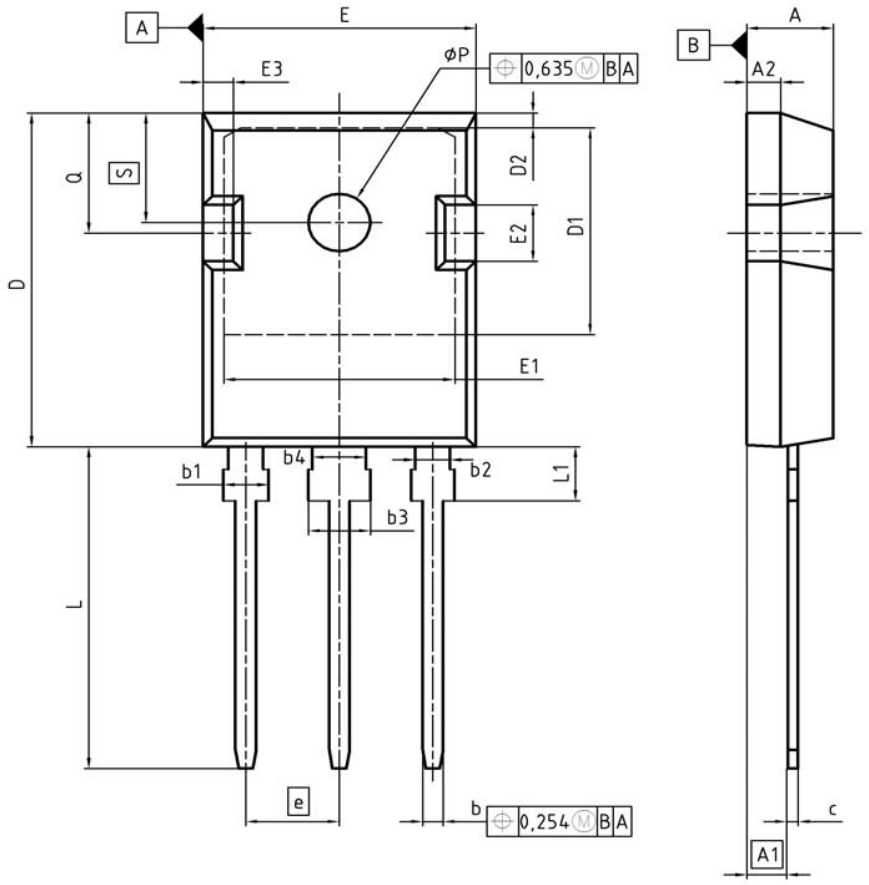

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.90	5.16	0.193	0.203
A1	2.27	2.53	0.089	0.099
A2	1.85	2.11	0.073	0.083
b	1.07	1.33	0.042	0.052
b1	1.90	2.41	0.075	0.095
b2	1.90	2.16	0.075	0.085
b3	2.87	3.38	0.113	0.133
b4	2.87	3.13	0.113	0.123
c	0.55	0.68	0.022	0.027
D	20.82	21.10	0.820	0.831
D1	16.25	17.65	0.640	0.695
D2	1.05	1.35	0.041	0.053
E	15.70	16.03	0.618	0.631
E1	13.10	14.15	0.516	0.557
E2	3.68	5.10	0.145	0.201
E3	1.68	2.60	0.066	0.102
e	5.44		0.214	
N	3		3	
L	19.80	20.31	0.780	0.799
L1	4.17	4.47	0.164	0.176
øP	3.50	3.70	0.138	0.146
Q	5.49	6.00	0.216	0.236
S	6.04	6.30	0.238	0.248

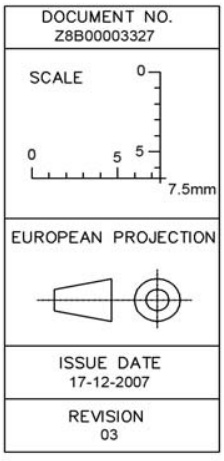

Please note the new package dimensions arccording to PCN 2009-134-A

Published by
Infineon Technologies AG
81726 Munich, Germany

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

1 New package outlines TO-247

Assembly capacity extension for CoolMOSTM technology products assembled in lead-free package PG-TO247-3 at subcontractor ASE (Weihai) Inc., China (Changes are marked in blue.)

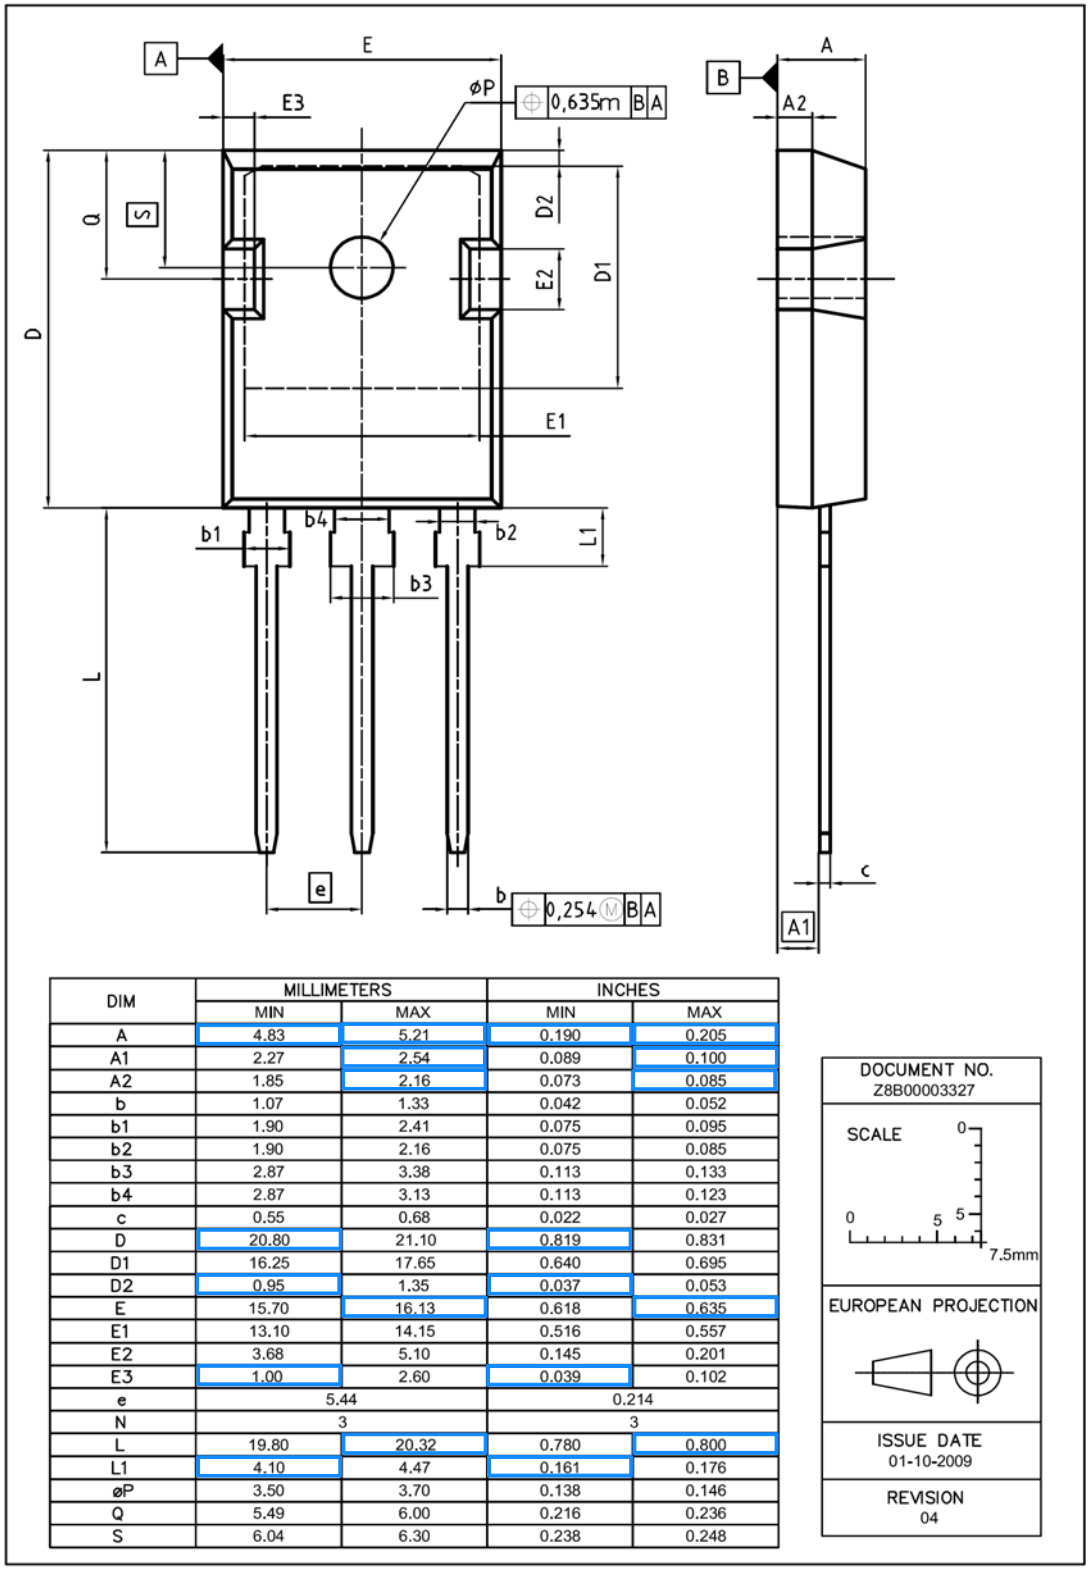

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.83	5.21	0.190	0.205
A1	2.27	2.54	0.089	0.100
A2	1.85	2.16	0.073	0.085
b	1.07	1.33	0.042	0.052
b1	1.90	2.41	0.075	0.095
b2	1.90	2.16	0.075	0.085
b3	2.87	3.38	0.113	0.133
b4	2.87	3.13	0.113	0.123
c	0.55	0.68	0.022	0.027
D	20.80	21.10	0.819	0.831
D1	16.25	17.65	0.640	0.695
D2	0.95	1.35	0.037	0.053
E	15.70	16.13	0.618	0.635
E1	13.10	14.15	0.516	0.557
E2	3.68	5.10	0.145	0.201
E3	1.00	2.60	0.039	0.102
e	5.44		0.214	
N	3		3	
L	19.80	20.32	0.780	0.800
L1	4.10	4.47	0.161	0.176
øP	3.50	3.70	0.138	0.146
Q	5.49	6.00	0.216	0.236
S	6.04	6.30	0.238	0.248

DOCUMENT NO.
Z8B00003327

SCALE
0 5 5 7.5mm

EUROPEAN PROJECTION

ISSUE DATE
01-10-2009

REVISION
04

Figure 1 Outlines TO-247, dimensions in mm/inches