

SUNON®

Super Green Fan

Filling the Air with Wonder



A Symbiotic Interaction between Technology & Nature



Specification

MODEL	FUNCTION	BEARING SYSTEM	VOLTAGE (V)	CURRENT (mA)	POWER CONSUMPTION (W)	SPEED (RPM)	AIR FLOW (CFM)	STATIC PRESSURE (Inch-H ₂ O)	NOISE (dB)
SG40281B1-0000-A99	--	BALL	12	520	6.24	19000	25.6	1.45	58.5
SG40281B1-0000-G99	FG	BALL	12	520	6.24	19000	25.6	1.45	58.5
SG40281B1-0000-F99	RD	BALL	12	520	6.24	19000	25.6	1.45	58.5
SG40281B1-0000-H99	PWM	BALL	12	520	6.24	19000	25.6	1.45	58.5
SG40281B1-0000-S99	FG+PWM	BALL	12	520	6.24	19000	25.6	1.45	58.5
SG40281B1-0000-Q99	RD+PWM	BALL	12	520	6.24	19000	25.6	1.45	58.5

© The specification for SG series is for reference only and will be subject to change without notice in advance. For more product information, please contact your SUNON sales representative.

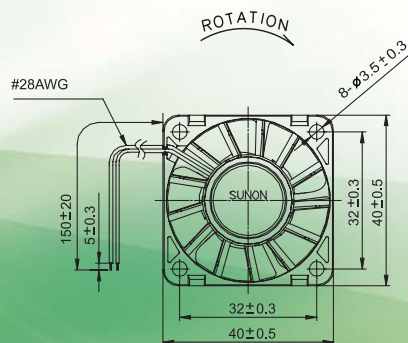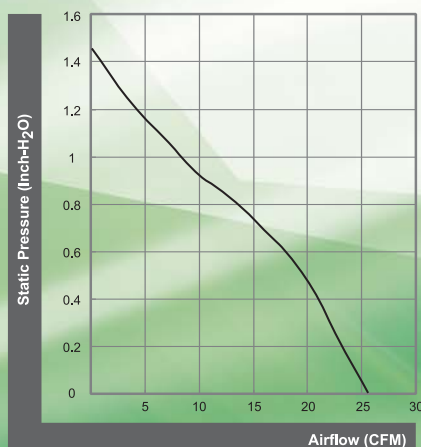

(Units : mm)

