


C1206F104K3RACTU

aka C1206F104K3RAC7800

Capacitor, ceramic, 0.1 uF, +/-10% Tol, 25V, X7R, 1206

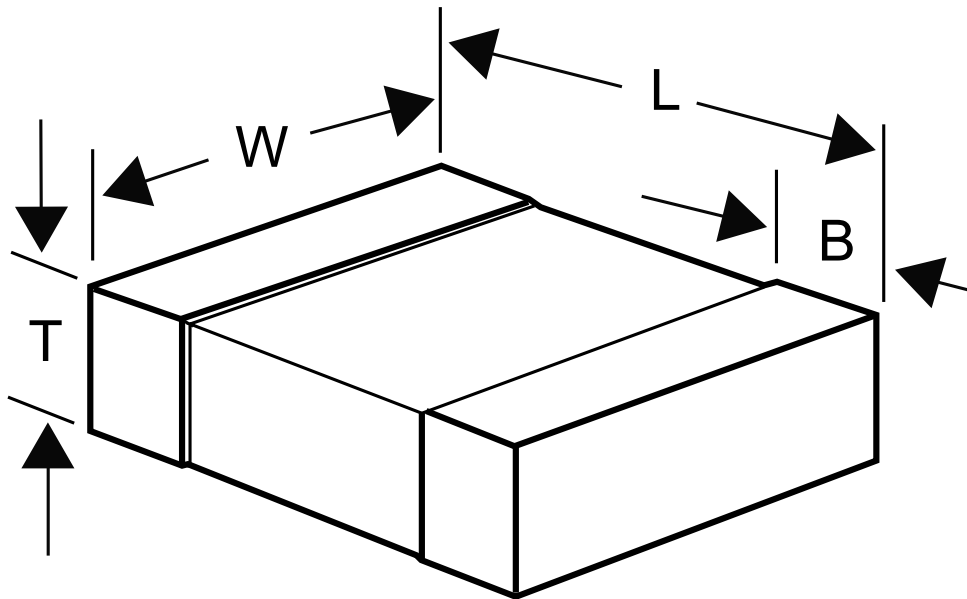

Dimensions (mm)

Specifications

ID	Dimension	Tolerance
L	3.20	+/-0.20
W	1.60	+/-0.20
T	0.90	+/-0.10
B	0.50	+/-0.25

Manufacturer:	KEMET
Capacitance:	0.1 uF
Chip Size:	1206
Voltage:	25V
Temperature Coefficient:	X7R
Tolerance:	+/-10%
Application:	Open Mode
Termination Type:	Tin
Dissipation Factor:	3.5%
Insulation Resistance:	5 GOhm
Dielectric Strength:	62.5V
Package Kind:	T&R
Package Size:	7in
Package Type:	Plastic
Package Quantity:	4000