



WBT Tube Connectors

Note: Connectors are not drawn to scale

Ethernet (100Mbit/s or better)

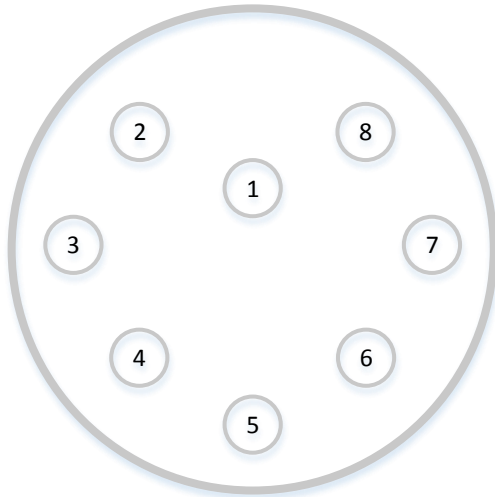


- 1: Brown
- 2: Brown/white
- 3: Blue
- 4: Blue/white
- 5: Orange
- 6: Orange/white
- 7: Green
- 8: Green/white

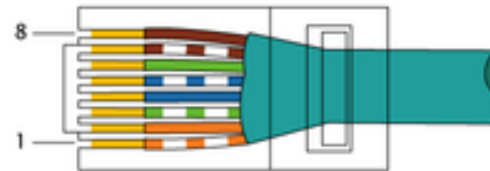

Face view DBH8F (female)


Transducers

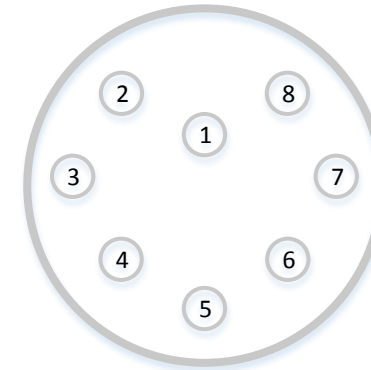

- 1: Channel 1+
- 2: Channel 1-
- 3: Channel 2+
- 4: Channel 2-
- 5: Channel 3+
- 6: Channel 3-
- 7: Channel 4+
- 8: Channel 4-

Face view MCBH8F (female)


Power (15V)

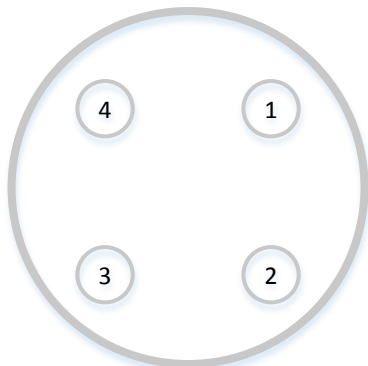

- 1: Supply transceiver 1 (+12 to +16 volt)
- 2: 0 volt transceiver 1
- 3: 0 volt transceiver 2
- 4: Supply transceiver 2 (+12 to +16 volt)

Face view MCBH4M (male)

Power (24V)

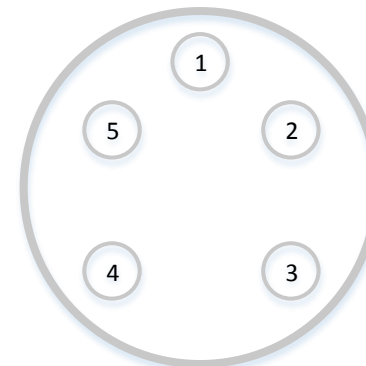

- 1: Not in use
- 2: Supply transceiver 1 (+20 to +50 volt)
- 3: 0 volt transceiver 1
- 4: 0 volt transceiver 2
- 5: Supply transceiver 2 (+20 to +50 volt)

Face view MCBH5M (male)