


MINI-CON SERIES MIN-CCR


MINI-CON Cable Connector Receptacle
Mates with MIN-CCP
Dummy Connector: MIN-DSP

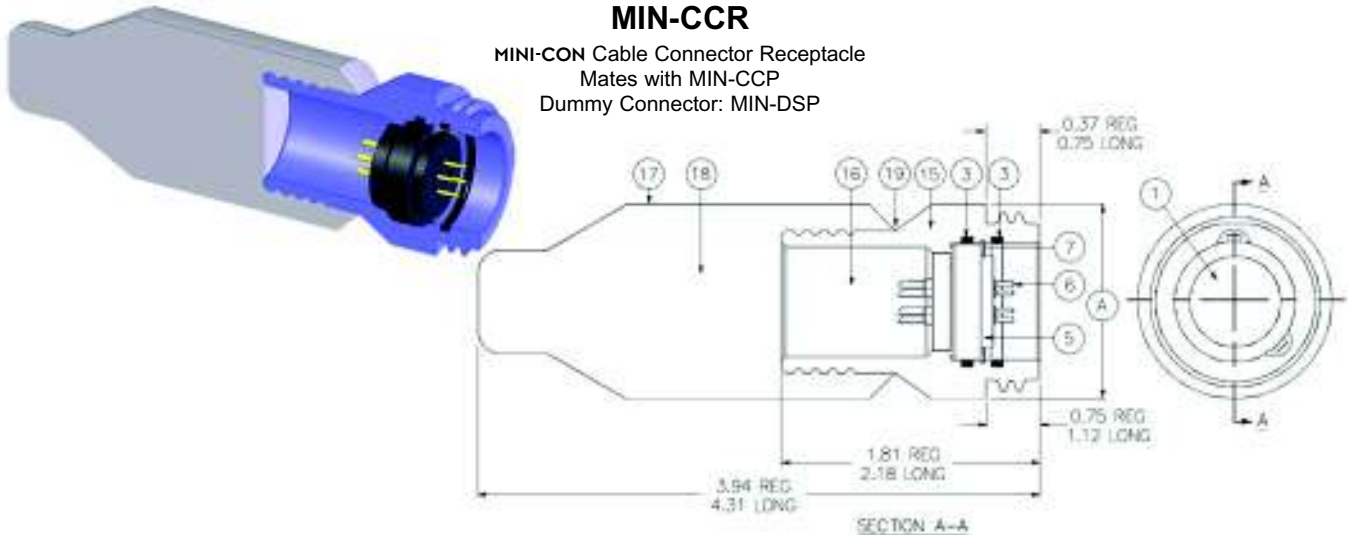

CONNECTOR	A - Ø (INCHES)	3 - O-RING	7 - SPIROLOX	23 - RETAINING RING	24 - O-RING	25 - O-RING	26 - SPIROLOX	R/A HEIGHT (INCHES)	REAR SHELL OD (INCHES)
MIND-CCR* / CCP	0.75	2-011	VH-31	D1400-0120	2-012	2-010	VH-37	2.25	0.473***
MINE-CCR* / CCP	0.87	2-013	VH-43	D1400-0150	2-014	2-012	UR50	2.25	0.595***
MING-CCR / CCP	1.00	2-014	UR50	5100-68	2-015	2-013	UR56	2.63/3.00	0.687
MINK-CCR / CCP	1.12	2-016	UR62	5100-78	2-017	2-015	UR68	2.63/3.00	0.781
MINL-CCR / CCP	1.25	2-018	UR75	5100-87	2-019	2-016	UR75	2.63/3.00	0.875
MINM-CCR / CCP	1.37	2-019	UR81	5100-100	2-020	2-018	UR87	2.81/3.18	1.000
MINO-CCR / CCP	1.62	2-023	UR106	5100-118	2-024	2-020	UR100	2.81/3.18	1.187
MINP-CCR / CCP	1.75	2-025	UR118	5100-131	2-027	2-022	UR112	3.00/3.37	1.312
MINQ-CCR / CCP	1.87	2-028	UR137	5100-150	2-028	2-025	UR131	3.00/3.37	1.500
MINR-CCR / CCP	2.00	2-029	UR150	5100-156	2-029	2-026	UR137	3.19/3.56	1.562
MINT-CCR / CCP	2.50	2-031	UR175	5100-187	2-032	2-029	UR162	varies w/cable	1.875
MINU-CCR / CCP	2.75	2-033	UR200	5100-206	2-033	2-031	UR187	varies w/cable	2.062
MINX-CCR / CCP	3.50	2-037	UR250	5100-268	2-038	2-033	UR212	varies w/cable	2.687

MINI-CON SERIES MIN-CCP

MINI-CON Cable Connector Plug
Mates with MIN-BCR/FCR/CCR
Dummy Connector: MIN-DSR

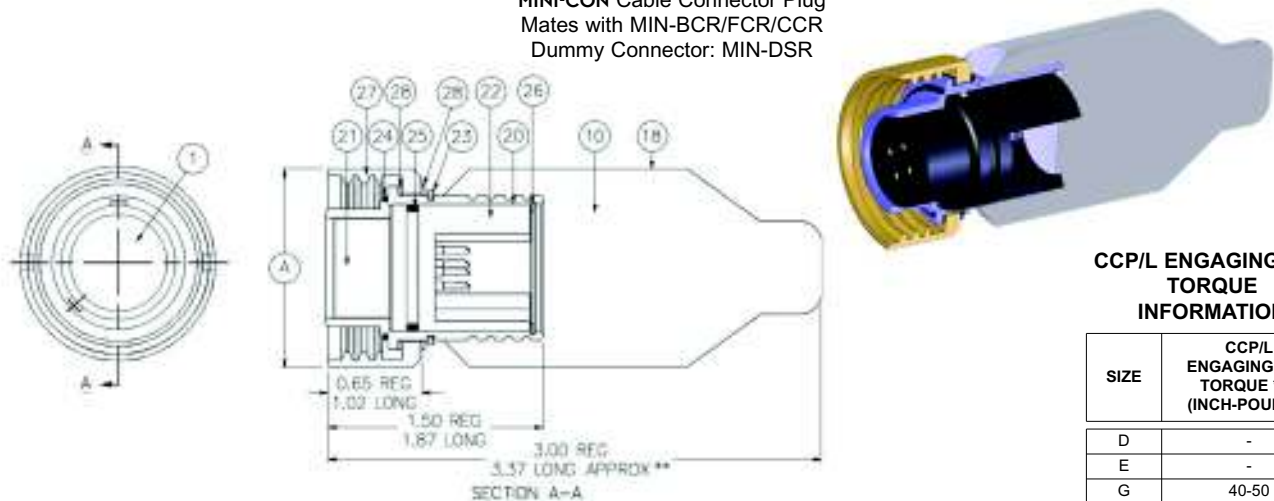

NOTES:

- For contact configurations please refer to pages 16-20.
- For maximum cable O.D please refer to page 15.
- When ordering MIN-CCR you receive: 3, 5, 6, 7, 15. When ordering MIN-CCP you receive: 20, 21, 22, 23, 24, 25, 26, 27, 28. Please refer to the MINI-CON master parts and materials list on page 15.
- * BCR may be used as a CCR. CCR is not available at this time for the MIND and MINE sizes.
- ** Will vary with cable size.
- *** CCP's only. CCR's is TBA.
- **** During engaging it may be necessary to use 50% of the engaging nut torque value.
- Molding is optional.
- Field Installable Boot is available and cable diameter must be specified at time of order.

CCP/L ENGAGING NUT TORQUE INFORMATION

SIZE	CCP/L ENGAGING NUT TORQUE **** (INCH-POUNDS)
D	-
E	-
G	40-50
K	40-60
L	50-70
M	65-95
O	75-105
P	80-110
Q	85-115
R	90-120
T	125-150
U	135-160
X	155-180