

WinFrog Device Group:	USBL
Device Name/Model:	SIMRAD310
Device Manufacturer:	Kongsberg Simrad AS P.O. Box 483 3601 Kongsberg Norway E-mail: WebOffice@kongsberg.simrad.com Phone: 47 32 28 50 00 Fax : 47 32 73 59 87
Device Data String(s) Output to WinFrog:	Code, X,Y,Z, and error check. Also Heading Pitch and Roll. "Code\tAge\tX\tY\tZ\tErr\t " See CONFIGURATION DETAILS for complete string data output from the HPR300.
WinFrog Data String(s) Output to Device:	Nil
WinFrog .raw Data Record Type(s):	Type 309: USBL Transceiver, Beacon

DEVICE DESCRIPTION:

Simrad's Hydroacoustic Positioning System's (HPR's) are often to determine the position of a vessel, or structure, or for tracking towfish and ROV's. This device is similar to the Simrad 300P with the addition of Attitude and Heading transmitted from the device. Refer to the Simrad 300P for device specifications, etc.

DEVICE CONFIGURATION INSTRUCTIONS:

Baud Rate: 4800
Data Bits: 7
Stop Bits: 2
Parity : Odd

Standard RS-232C serial communication used to output data to external devices. Refer to the Configuration Details section for detailed I/O string telegrams.

WINFROG I/O DEVICES > CONFIG OPTIONS:

The Simrad 310 is accessed via the USBL device types. The Hydrophone, Beacon, Attitude and Heading sub-devices are added to the computer when the Simrad 310 is initiated. No configuration is available from the I/O Devices Window.

WINFROG VEHICLE TEXT WINDOW > CONFIGURE VEHICLE DEVICES > DEVICE > EDIT OPTIONS:


As mentioned above, adding the Simrad 310 device to WinFrog creates four separate data items: the **USBL,SIMRAD 310,USBL HYDROPHONE**, the **USBL,SIMRAD 310,BEACON**, the **USBL,SIMRAD 310,ATTITUDE** and the **USBL,SIMRAD 310,HEADING**.

For remote vehicle tracking, the Hydrophone data item must be added to the device list of the vehicle to which the hydrophone has been physically attached (i.e. the main ship). The Beacon data item must be added to the vehicle to which the beacon has been physically attached (i.e. the ROV or towed vehicle).

USBL systems can also be used for positioning of the main vessel. In this type of operation the USBL Beacon must be physically attached to some fixed point on the seabed or subsurface structure. In this type of operation the Hydrophone position (i.e. vehicle position) is derived from measurements made to the fixed beacon. For this type of positioning, you must define a working Xponder File (*.XPT) in WinFrog, and enter the fixed position of the Beacon into that file. The Hydrophone must be added to the ship's device list and configured for positioning as opposed to tracking mode. See chapter 5 of the WinFrog Users Guide for more information on setting up *.XPT files.

1. Configuration of the USBL Hydrophone.

Once the SIMRAD 310 Hydrophone has been added to the appropriate vehicle's device list it must be edited to suit the application. In the vehicle's Devices list, highlight the USBL,SIMRAD 310,USBL HYDROPHONE then click on the Edit button to the right. The Configure USBL Hydrophone dialog window appears as seen below.

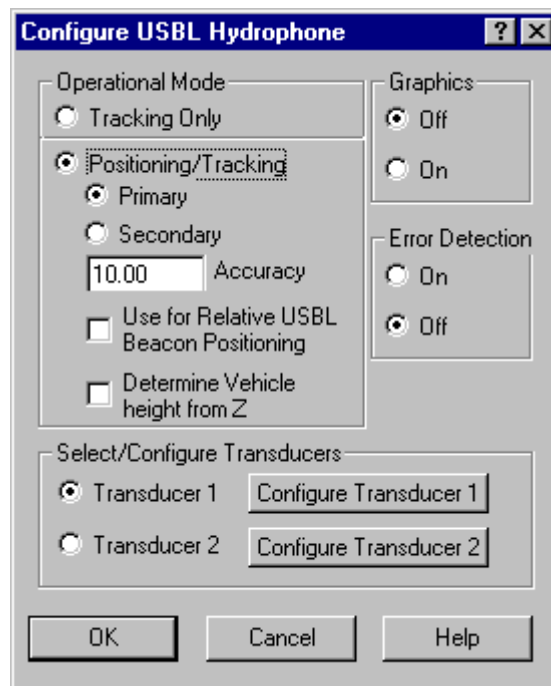

Operational Mode:

As mentioned above, USBL systems can be used for tracking of remote vehicles or for positioning of the main vehicle to which the hydrophone is attached. Select Tracking Only if relative tracking of a structure/vessel is desired.

Select **Positioning/Tracking** and **Primary** if you want to position the Master Vessel relative to a stationary (fixed) beacon. The beacon must be located on the stationary (fixed) object, as defined in a working XPONDER (.XPT) file. Select the **Secondary** radio button if this is not the primary positioning source (i.e. if this is a comparison position), or if you are setting up for a USBL Calibration. Note as well that if you are setting up for a USBL Calibration, the Hydrophone should also be specified as a Secondary positioning device. See chapter 20 of the WinFrog User's Guide for more information on USBL Calibrations.

If **Positioning/Tracking** is selected, you can also specify **Use for Relative USBL Beacon Positioning**. This feature controls the use of the USBL positioning of the hydrophone from a fixed beacon for application to relative USBL Beacon positioning. In this mode, the difference between the hydrophone position as determined directly from observation to fixed beacon is compared to the hydrophone position determined from other positioning sources (e.g. DGPS). This difference is then applied to the position determined for any tracked beacon. The concept is that any inherent errors due to local conditions, both environmental and mechanical, are cancelled out. This is independent of the Primary/Secondary setting.

Note: the default value for the Positioning Accuracy is 10m. It is not recommended to set this value below 7m. In Tracking Mode, the accuracy setting is in the Beacon Window.

Determine Vehicle height from Z

Select this checkbox if the USBL system is to be used to determine the height of the vehicle. This is independent of the Primary/Secondary setting.

Graphics:

Select On to have WinFrog display the device name and a square at the location of the hydrophone, within the Graphics and Bird's Eye windows.

Error Detection:

By enabling this option, error detection codes are included in the Raw Files. This option is mainly for post project QC analysis and future development.

Select/Configure Transducers:

Some USBL systems can be configured with two hydrophones. Before configuring a transducer ensure that it is the correct one, and that the values entered refer to that device. Click Configure Transducer 1 or Configure Transducer 2 as required. The Configure USBL Transducer dialog box appears as seen below.

Configure USBL Transducer [?] [X]

Calibration Corrections

Range Scale Factor	Head Rotation Correction
1.00000	0.00000
Pitch Correction	Roll Correction
0.00000	0.00000

NOTE: Corrections sign conventions are
Roll=(+)Stbd down; Pitch=(+)Stern down

USBL System Internal Offsets

Offsets from the point the data is related to, to the transducer. These values will be subtracted from the USBL output data to get data related to the transducer.

Fore/Aft	Port/Stbd	Z (down +)
0.00m	0.00m	0.00m

WinFrog Offsets, from CRP to Transducer

Fore/Aft	Port/Stbd	Depth (down +)
0.00m	0.00m	0.00m

OK Cancel Help

Calibration Corrections:

WinFrog allows you to enter **Range Scale**, **Heading**, **Pitch** and **Roll** correction values to correct raw USBL measurements. Note that the Heading, Pitch and Roll values are entered in degrees and decimal degrees. These values can be determined by using WinFrog's USBL calibration utility. See chapter 20 of the WinFrog User's Guide for detailed information on calibration of USBL systems.

Offsets:

This section of the Configure USBL Transducer dialog box is for the entry of X,Y and Z offsets that will be applied to the raw observations received from the SIMRAD 310 console.

The upper fields are used to remove any offsets that have been entered into the SIMRAD 310 console. This may come into use specifically when USBL systems are used for vessel positioning, where the ship's DP system needs positional information to relate to the vessel's center of gravity as opposed to just at the USBL hydrophone. WinFrog however requires all XYZ offsets to relate to the USBL hydrophone. These upper fields are then used to enter the same offsets as are entered in the SIMRAD 310 Console, nullifying the offsets in the SIMRAD 310. As these values are subtracted from the received data, ensure that values are entered using the same sign as internal SIMRAD 310 offsets.

The lower fields, **Winfrog Offsets, from CRP to Transducer**, are similar to all other positional device offsets entered in Winfrog. These offsets must be entered to relate the hydrophone's position to the vessel's Common Reference Point (CRP). All offsets are entered with signage referring to the distance *from* the CRP *to* the hydrophone.

2. Configuration of the USBL Beacon

As mentioned above, for subsurface vehicle positioning, the USBL beacon must be added to the appropriate vehicle's device list. Once added to the device list, it must be edited to suit the application. Editing the **USBL, SIMRAD 310, Beacon** device brings up the Configure USBL Beacon dialog box, as seen below.

Configure USBL Beacon

Calculation: ☒ Primary ☐ Secondary

Accuracy: 10.00m

Error Detection: ☐ On ☒ Off

Deskewing Options

☒ Deskew Beacon Timestamp
The data signal reception time is corrected to the signal transmission time based on sound velocity and slant range.

☒ Deskew Hydrophone Position
The hydrophone position is deskewed to the appropriate beacon epoch based on the hydrophone vehicle's speed and CMG. If not on, the last updated position for the hydrophone is used regardless of age.

Code: 1

ROV Depth from USBL: ☒ Yes ☐ No

LBL Calibration: ☐ Use For Calibration

Graphics: ☒ Off ☐ On

Offset, from the CRP

Fore/Aft	Port/Stbd	Height (+ above CRP)
0.00m	0.00m	0.00m

OK Cancel Help

Calculation

Set Calculation to **Primary** if the beacon is to be used for positioning the vehicle to which it is attached. Multiple beacons can be added to the same vehicle's device list, each configured as Primary. WinFrog will calculate a weighted mean position using the Accuracy value entered.

Accuracy

This value is used by WinFrog to weight the use of different positioning devices in solving a single vehicle's position. The lower the accuracy value entered, the more accurate it is deemed to be, and hence the more weight that will be applied to it in comparison to the other devices.

Error Detection:

Setting Error Detection to 'On' instructs WinFrog to identify error codes received in the USBL data string and disable the use of bad data. USBL systems include various error codes in the data string when the beacon is not within the optimum "cone of operation" or other operational parameters have been exceeded.

Deskewing Options

Deskew Beacon Timestamp

This option is for future development.

Deskew Hydrophone Position

When positioning the beacon, WinFrog uses the last calculated position for the associated USBL Hydrophone to determine the tracked beacon's position.

Depending on the vehicle's Kalman filter and Dead Reckoning settings, the position of the hydrophone may be up to 1 second old.

It is recommended that this deskewing option be enabled to remove positional inaccuracies associated with this latency.

Code:

Enter a value matching the code of the beacon attached to the vehicle.

ROV Depth from USBL:

If **Yes** is selected, the ROV's depth will be set to the calculated USBL beacon depth.

LBL Calibration:

Select the **Use for Calibration** checkbox if the beacon is to be used in an LBL Calibration.

Graphics:

Select **On** to have WinFrog plot a square and label to represent the beacon location in the Graphics and Bird's Eye displays.

Offsets:


This portion of the dialog box is used to enter Offsets that relate the beacon's location to the vehicle's Common Reference Point (CRP). These values are set similar to values that would be applied to any device offset within Winfrog, with values entered as measured from the CRP to the device. A heading device must also be added to the vehicle's device list to ensure the correct application of the offsets.

3. Configuration of the Attitude

Attitude:


The Attitude can be enabled (turned on) within the Attitude Window shown below. By enabling the Attitude, vessel and sensor offsets are corrected for the pitch and roll, and in this case, the position of the Hydrophone will be corrected.

The Pitch and Roll calibration correction values are added to the attitude data.

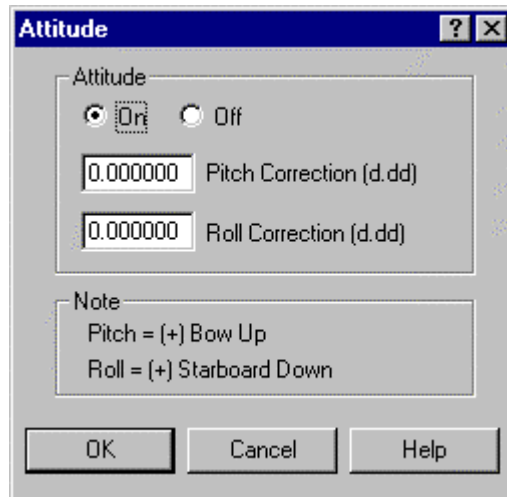

4. Configuration of Heading

The configuration of the Heading is similar to the Gyro Input to WinFrog. If there is a heading sensor input to Winfrog, such as a survey gyro, this device can be set to secondary and used as a back up heading.

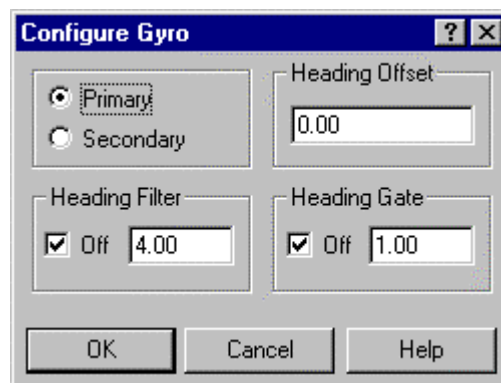

CONFIGURATION DETAILS:

The Simrad 310 is similar to the Simrad 300P. Please refer to the Operator's Manual for complete information on the configuration of the device. The Simrad 310 was not available at the time this document was written.

Telegrams sent from the HPR consist of the following bytes:

Byte Contents	Number of bytes	Byte index in telegram
HEAD	1	0
ROLL (or X-angle)	2	1
PITCH (or Y-angle)	2	3
COURSE	2	5
TRANSPONDER INDEX	1	7
X-POS OR RANGE	3	8
Y-POS OR RANGE	3	11
Z-POS OR RANGE	3	14
STATUS	1	17
TIMEOUT	1	18
TP's in the sequence	3	19
TRACKING TD-ANGLE	2	22
TEST	1	24
TP TYPE	1	25
TP SPECIFICATION	1	26
TRANSDUCERS	1	27
TD STATUS	1	28
KALMAN FILTER WINDOW	1	29
CHECKSUM	1	30
END OF TELEGRAM	1	31

Telegrams received the HPR consist of the following bytes:

Byte Contents	Number of bytes	Byte index in telegram
HEAD	1	0
TRANSPONDER INDEX	1	1
TRANSPONDER TYPE	1	2
Transponder Specification	1	3
TRANSDUCER	1	4
Coordinate Orientation and Reference Point	1	5
SPARE	1	6
SYMBOL1	6	7
SYMBOL2	6	13
VECTOR 1	4	19
SYMBOL MODE	1	23
SPARE	1	24
CHECKSUM	1	25
END OF TELEGRAM	1	26