



SEACON Rubber Molded Electrical Dry-Mate Connectors

Rubber Molded Electrical Dry-Mate Connectors
Provide Reliable and Versatile Connectivity
Solutions for Subsea Applications

SEACON

Rubber Molded Electrical Dry-Mate Connectors

Reliable and Versatile Connectivity Solutions for Subsea Applications

KEY FEATURES

- Dry-mate connector
- 4 connector sizes (A, F, G, K)
- Up to 12 contacts
- Up to 20,000 psig (approx. 45,000ft/13,700m) mated
- Up to 300 amps
- Special versions available (right-angle, crimp style, gripper body, without cable field installable version)
- Neoprene, GRE, stainless steel, polyacetal
- SO cable as standard
- Typical uses: Light to medium duty applications, Remotely Operated Vehicles (ROV)’s, diver equipment, water analysis instruments, sewer and waste water industry



TE Connectivity (TE)’s standard SEACON Rubber Molded connector series typically consists of an in-line female neoprene connector mated to a Glass Reinforced Epoxy (GRE) bulkhead connector. Various sizes are available ranging from single contact connectors up to 12 contact connectors.

Most Rubber Molded connectors are available with pins and sockets reversed to help prevent mismating of connectors, which otherwise look identical. This also allows for socket type contacts in a connector where there is a possibility of a “power-on” situation. Many of the bulkhead type connectors are available in 316 stainless steel. Male in-line connectors round out the series allowing for in-line mated sets not requiring bulkhead penetration. In addition, the WOC (without cable) type connectors allow for field installation in the event that a connector is damaged while at sea and needs replacing, or for long cable lengths that make cable transportation cost prohibitive.

The time proven Rubber Molded series is one of our most affordable lines and has been used on all types of underwater instrumentation including: underwater lighting, communications, Remotely Operated Vehicles (ROV)’s, thermistor arrays, hydrophone arrays, and all types of sonar systems. The contacts are gold plated per ASTM-B-488 and the series is rated up to 20,000 psig in a mated condition. These SEACON connectors have a long track record in the subsea industry dating back to the 1960’s.

Empower Engineers to Solve Problems, Moving the World Forward.

AMP | AGASTAT | CII | DEUTSCH | DRI | HARTMAN | KILOVAC
MICRODOT | NANONICS | POLAMCO | Raychem | Rochester | SEACON

Rubber Molded Electrical Dry-Mate Connectors



APPLICATION

Standard, Reversed Rubber Molded Series

- Applications requiring light to medium ruggedness
- Hazardous environments
- Field installable applications

Glass Reinforced Epoxy Series

- Applications requiring medium ruggedness
- Hazardous environments
- Power transmission
- Signal telemetry

Metal Shell Series

- Applications requiring heavy ruggedness
- Hazardous, rugged environments
- Power transmission
- Signal telemetry

CABLE

- **Rubber Molded Series:** Connector’s power capability may be limited by amperage and voltage rating of cable to which it is molded to. With the exception of field installable connectors, the in-line series are provided on a standard 18” length of 18 AWG SO cable unless otherwise specified.
- **Glass Reinforced Epoxy Series & Metal Shell Series:** Connector’s power capability may be limited by amperage and voltage rating of pigtails. Customer must specify if pigtails are to be applied.

SPECIFICATIONS

- **Mated Pressure:** Up to 20,000 psig.
- **Voltage Rating:** Up to 600 VDC (on standard cable).
- **Current:** Up to 300 amps.

MATERIALS

- **Connector Body:** Neoprene, Glass Reinforced Epoxy, Stainless Steel, Polyacetal,
- **Electrical Contacts:** Copper Alloy, Hard Gold Plated per ASTM-B-488.

MAINTENANCE

The following procedures detail the maintenance requirements for the Rubber Molded Series and their associated parts. Only qualified technicians should perform the maintenance. If connectors are periodically un-mated TE recommends the following:

1. Before un-mating ensure connectors are free of foreign contaminants. Visually check for and note any damage or abnormalities.
2. After un-mating visually check for and note any damage, cuts or abnormalities.
3. Clean any grease, moisture or foreign particles from connectors and sealing surface area.
4. In the event the internal contact surfaces are dirty or have been exposed to water, the connector should be flushed with distilled or deionized water and thoroughly dried.
5. The surface should be dried using a low pressure (15 - 25 psi) gas stream of dry nitrogen or filtered compressed air (dry nitrogen is preferred). This drying procedure helps ensures the removal of any small foreign particles.
6. Electrically test the connector in accordance with the parameters of the system.
7. Apply a thin film of an appropriate silicone grease or spray to the sealing surface. Cover/protect connector from foreign contaminants until ready to mate.


INSTALLATION & TORQUE OPERATIONS

1. Only qualified technicians should perform installation and torquing operations.
2. Torque values specified apply only when connector is installed in a metal housing.*
3. Torque values listed are maximum values not to be exceeded.
4. Locking sleeves are finger/hand tightened only.

* Torque values referenced in this literature assume installation into dry metal threads. Please contact the TE for recommendations.



Rubber Molded Bulkhead Connector Mates Visual Index

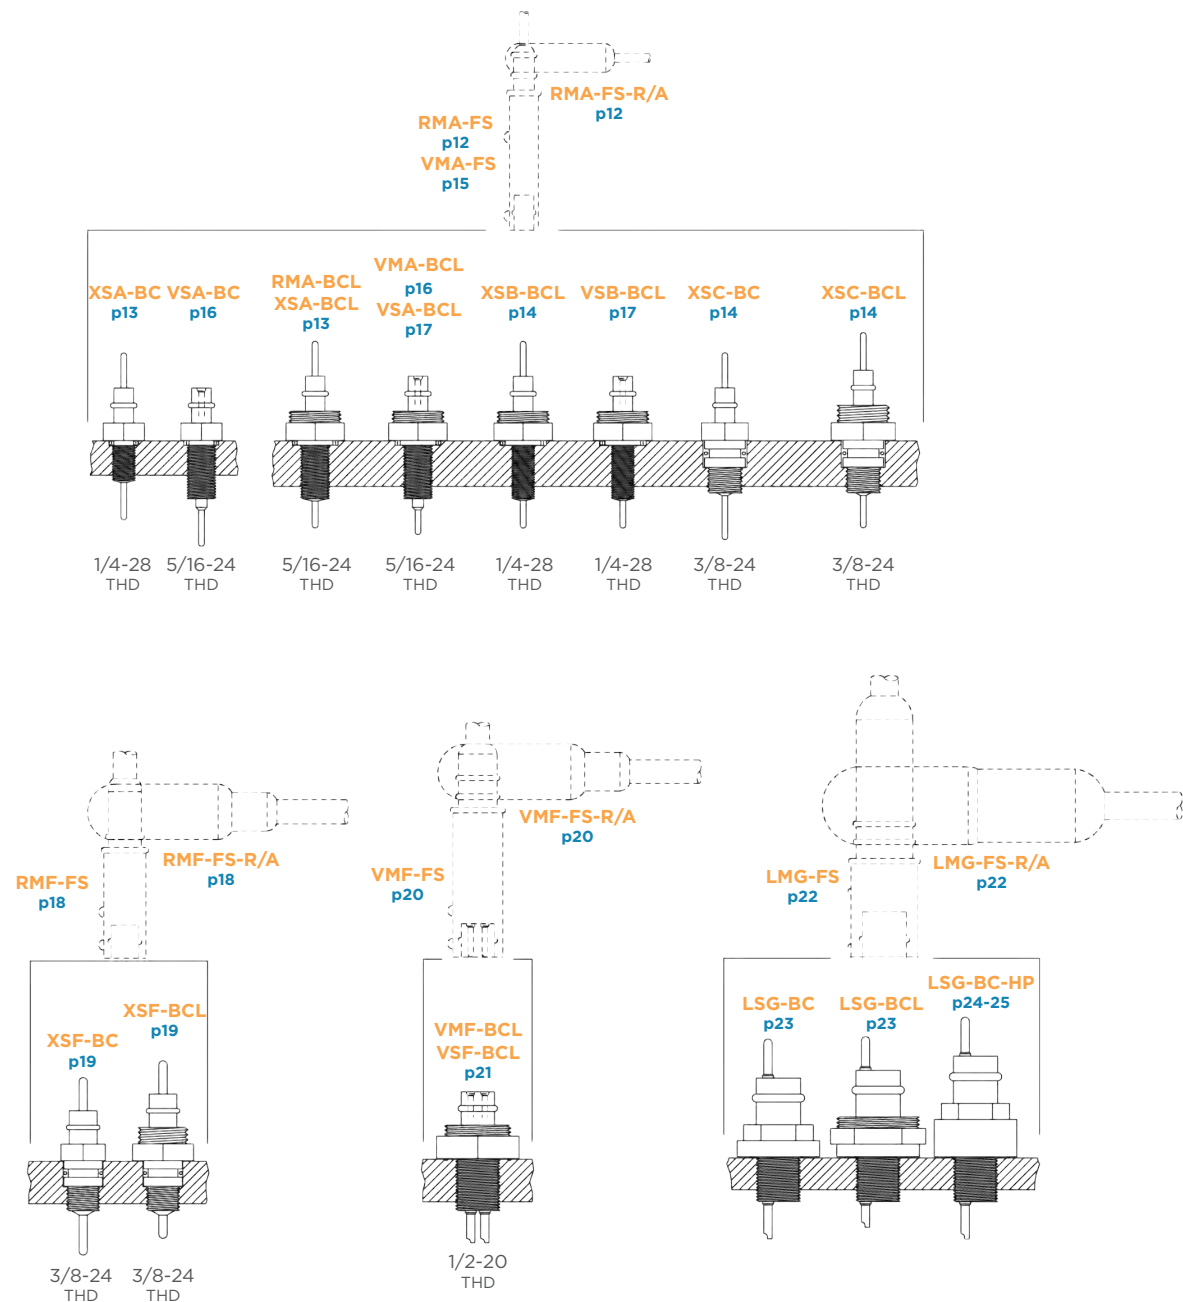

NOTE:
LSG-3-BC: 1/2-20
LSG-4-BC: 9/16-18
LSG-6-BC: 9/16-18

NOTE:
LSG-3-BCL: 1/2-20
LSG-4-BCL: 9/16-18
LSG-6-BCL: 9/16-18


NOTE:
LSG-3-BC HP: 1/2-20
LSG-4-BC HP: 9/16-18
LSG-6-BC HP: 9/16-18

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



Rubber Molded Bulkhead Connector Mates Visual Index

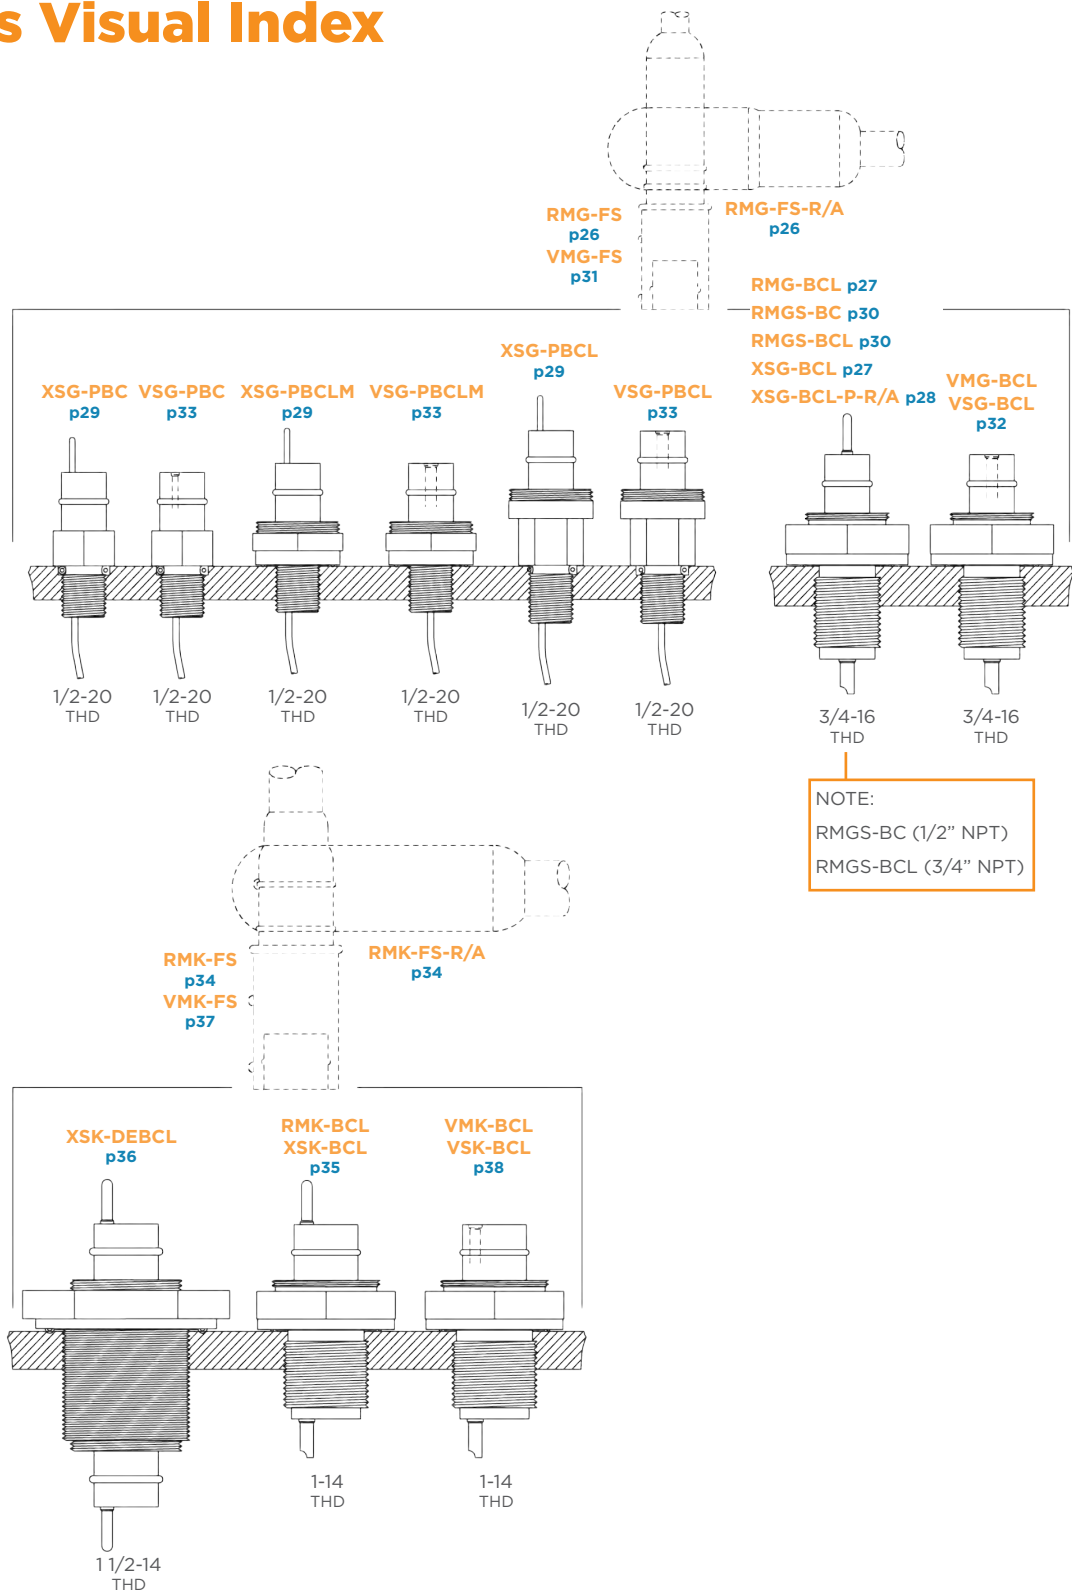

NOTE:
RMGS-BC (1/2" NPT)
RMGS-BCL (3/4" NPT)

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



Quick Reference Mating Table

Female Socket In-Line	Mateable Male Plug In-Line	Mateable Metal Shell Bulkhead	Mateable Glass Reinforced Epoxy
RMA-FS	RMA-MP	RMA-BCL	XSA-BC, XSA-BCL
RMA-FS-R/A	RMA-MP-SL		XSB-BCL
RMA-FS-SL			XSC-BC, XSC-BCL
VMA-FS	VMA-MP	VMA-BCL	VSA-BC, VSA-BCL
VMA-FS-R/A			VSBBCL
VMA-FS-SL	VMA-MP-SL		
RMF-FS	RMF-MP	N/A	XSF-BC, XSF-BCL
RMF-FS R/A			XSFDE-BCL (Formerly XSDE-BCL)
VMF-FS	VMF-MP	VMF-BCL	VSF-BCL
VMF-FS-R/A			
LMG-FS	LMG-MP	N/A	LSG-BC, LSG-BCL
LMG-FS-R/A			LSG-BC-HP
			LSG-BC-SC (Formerly LSK-BC-SC)
RMG-FS	RMG-MP	RMG-BCL	XSG-BCL, XSG-BCL-P-R/A
LMG-FS-R/A		RMGS-BC	XSG-PBC, XSG-PBCL, XSG-PBCLM
RMG-FS-WOC	RMG-MP-WOC	RMGS-BCL	
VMG-FS	VMG-MP	VMG-BCL	VSG-BCL
VMG-FS-R/A			VSG-PBC, VSG-PBCL, VSG-PBCLM
VMG-FS-WOC	VMG-MP-WOC		
RMK-FS	RMK-MP	RMK-BCL	XSK-BCL
RMK-FS-R/A			XSKDE-BCL
RMK-FS-WOC	RMK-MP-WOC		
VMK-FS	VMK-MP	VMK-BCL	VSK-BCL
VMK-FS-R/A			
VMK-FS-WOC	VMK-MP-WOC		



Rubber Molded Connectors

Ordering Information

Family Designator
Rubber Molded

Shell Size
A
F
G
K

Number of Contacts Total

Connector Type

In-Line Connectors

- LM Rubber Molded-Special Version
- RM Rubber Molded
- VM Reversed Rubber Molded
- FS Female Socket
- MP Male Plug
- MPD Male Plug Dummy
- FI Field Installable
- HP High Pressure
- LP Low Pressure
- SL Slip-on Series
- WOC Without Cable

Bulkhead Connectors

- LS Glass Reinforced Epoxy (Special Version)
- RM Metal Shell
- VM Reversed Metal Shell
- VS Reversed Glass Reinforced Epoxy
- XS Glass Reinforced Epoxy
- BC Bulkhead Connector
- BCL BC w/Locking Thread
- C COAX
- DE Double Ended
- HP High Pressure
- IDC Inboard Disconnect
- P Pigtails

Optional


- R/A Right Angle
- SC Solder Cup
- TH Thermistor Housing

RMX - X - XX - XX



Typical Right Angle and Straight Connector Indexing

In the case of right angle connectors, the cable is always perpendicular to the index, as shown.

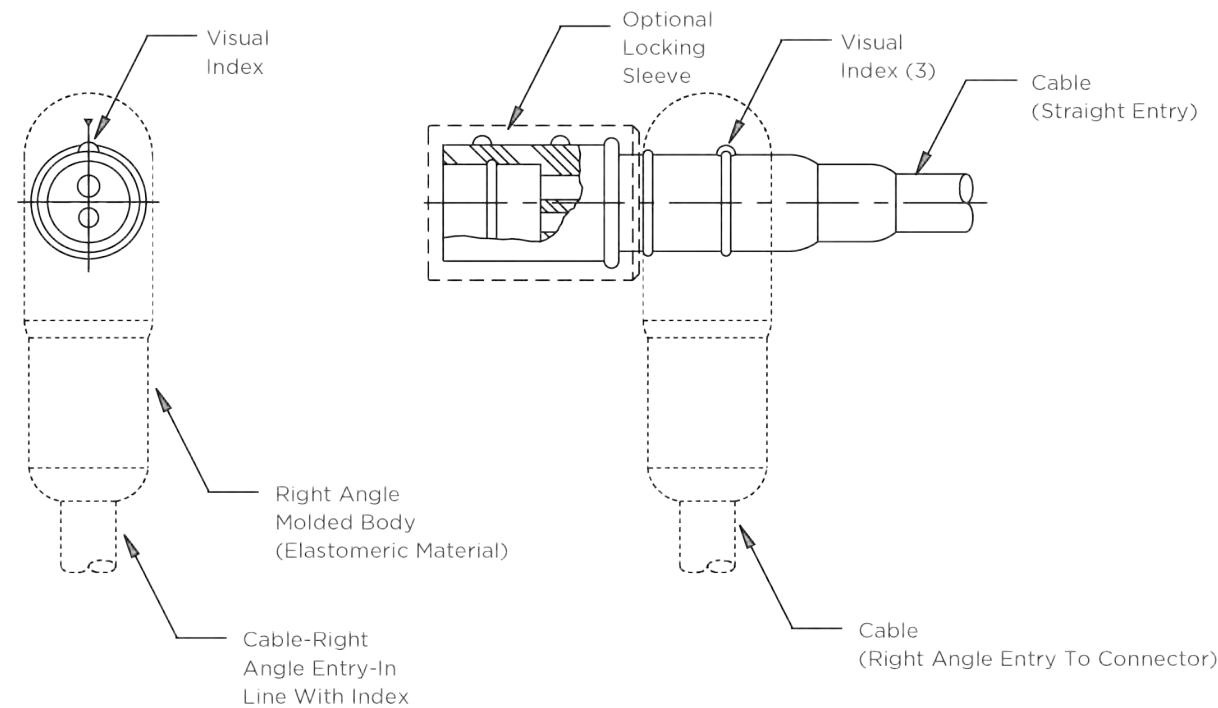

Mating

To help ensure that the connectors are not damaged during mating/un-mating, it is important to practice proper connect and disconnect procedures.


INCORRECT



CORRECT



Typical Mated Assembly and Options

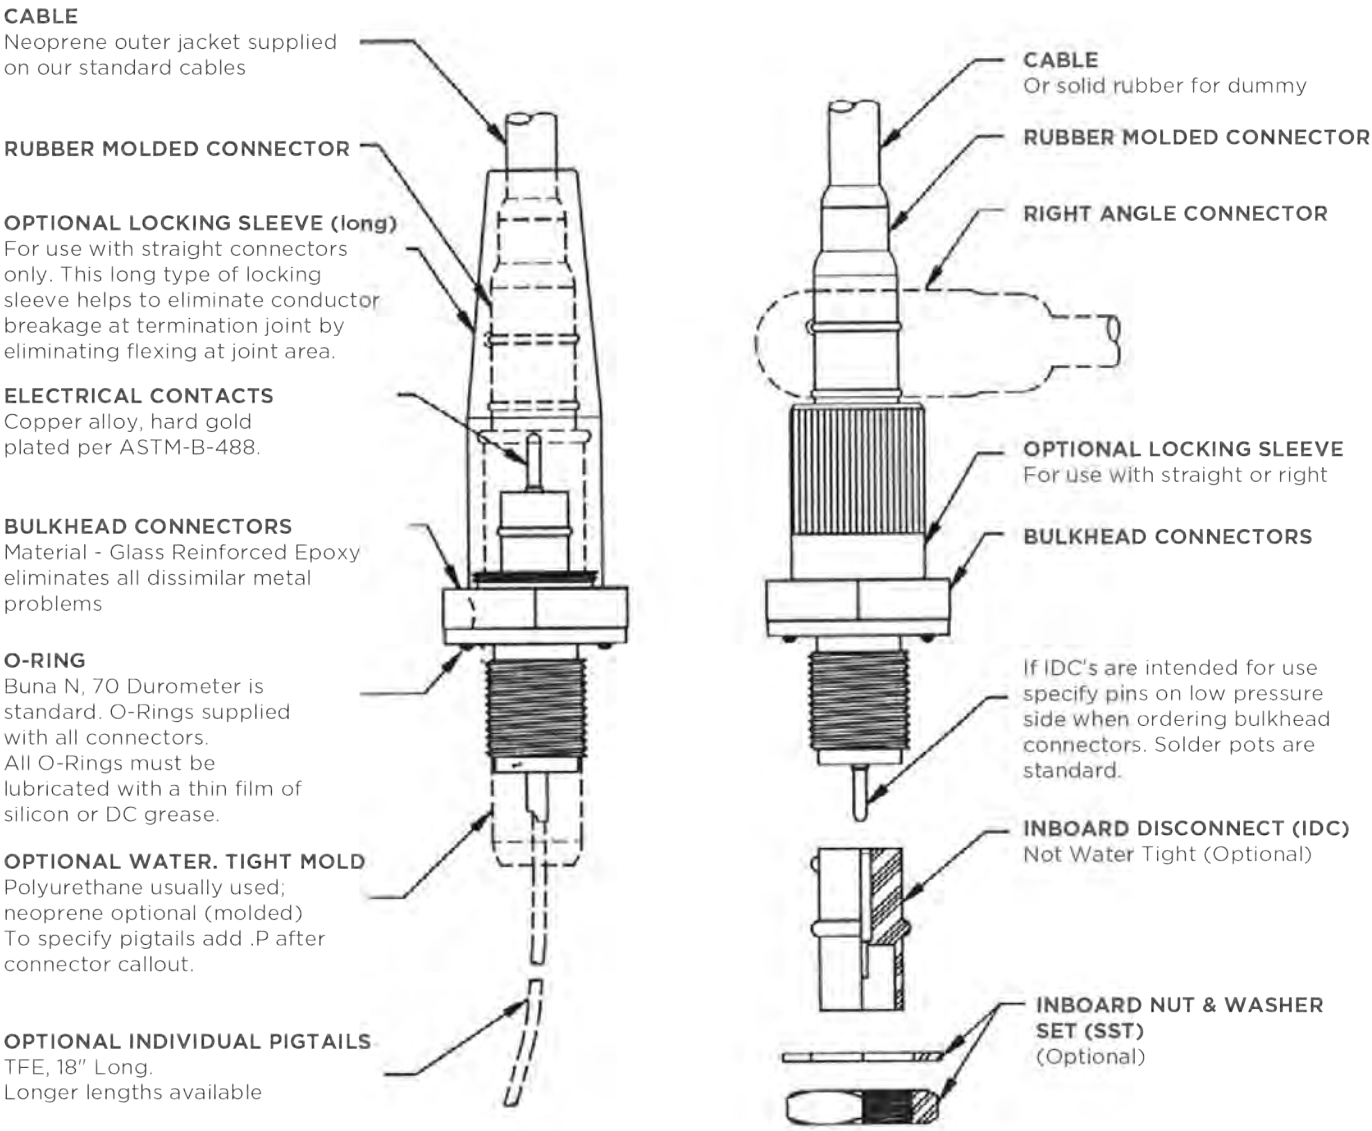

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



Locking Sleeves

Our range of locking sleeves are available in Polyacetal (D), but can also be available in plastic or stainless steel (S). Other materials may be available by special order.

Locking sleeves assists in avoiding accidental disconnection. The long locking sleeves are used to minimize flexing stress being applied to the electrical conductor terminations when the cable is flexed.

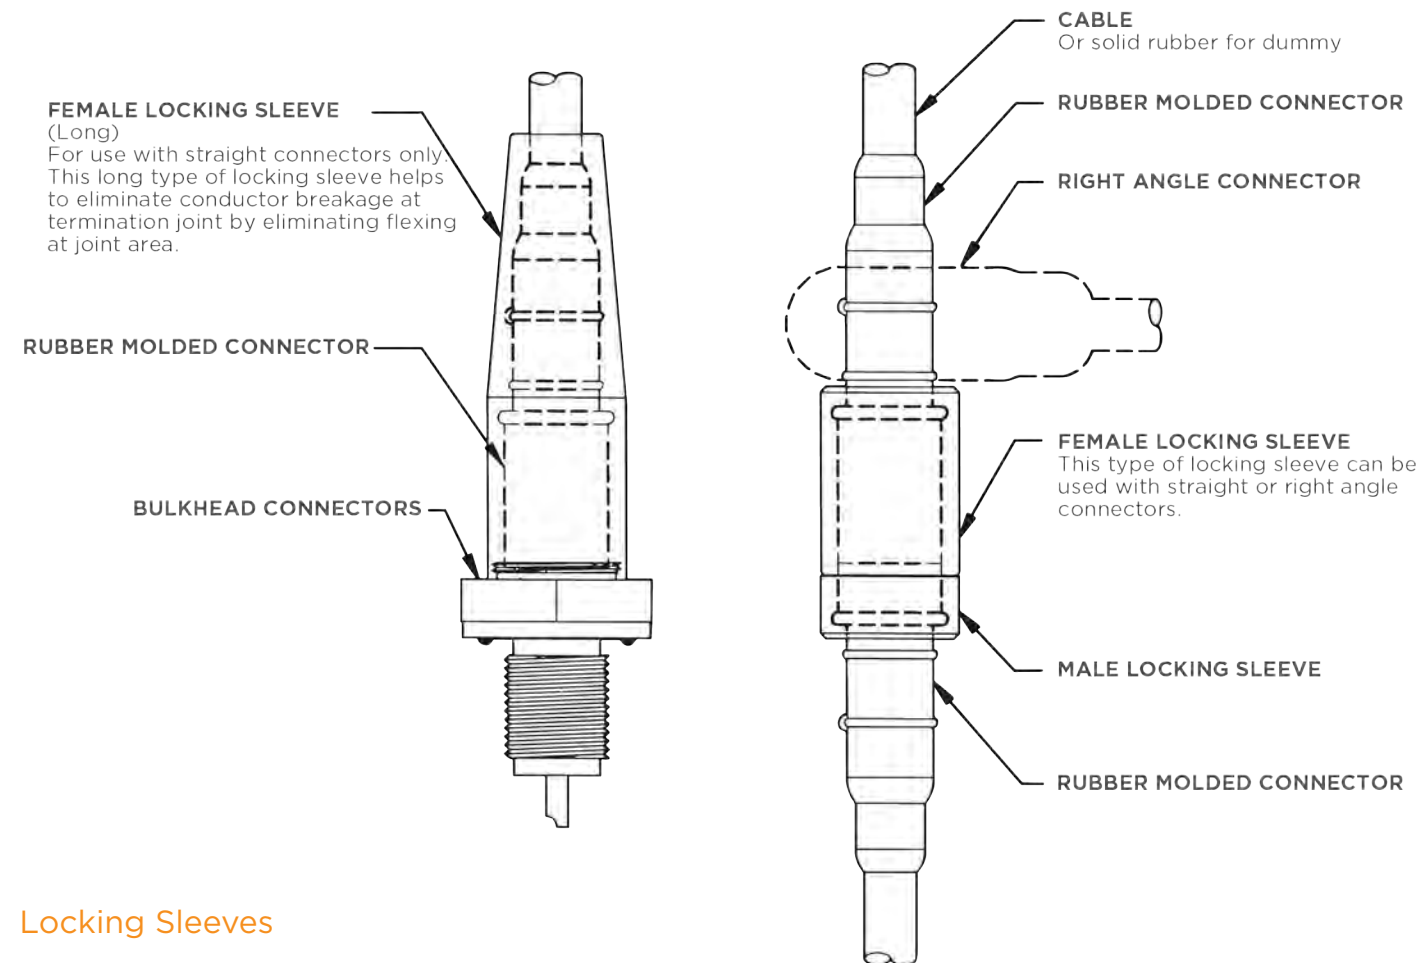

Locking Sleeves

Ordering Information

Shell Size

A, F, G, K

Connector Type

FLS Female Locking Sleeve

MLS Male Locking Sleeve

Material

D Polyacetal - Standard

S Stainless Steel

B Bronze; CA 630

X Long


TI Titanium

Note:

- Cable diameter must be specified when ordering (long -X) locking sleeves. X Size only uses 1/2 inch cable or smaller.



Locking Sleeves

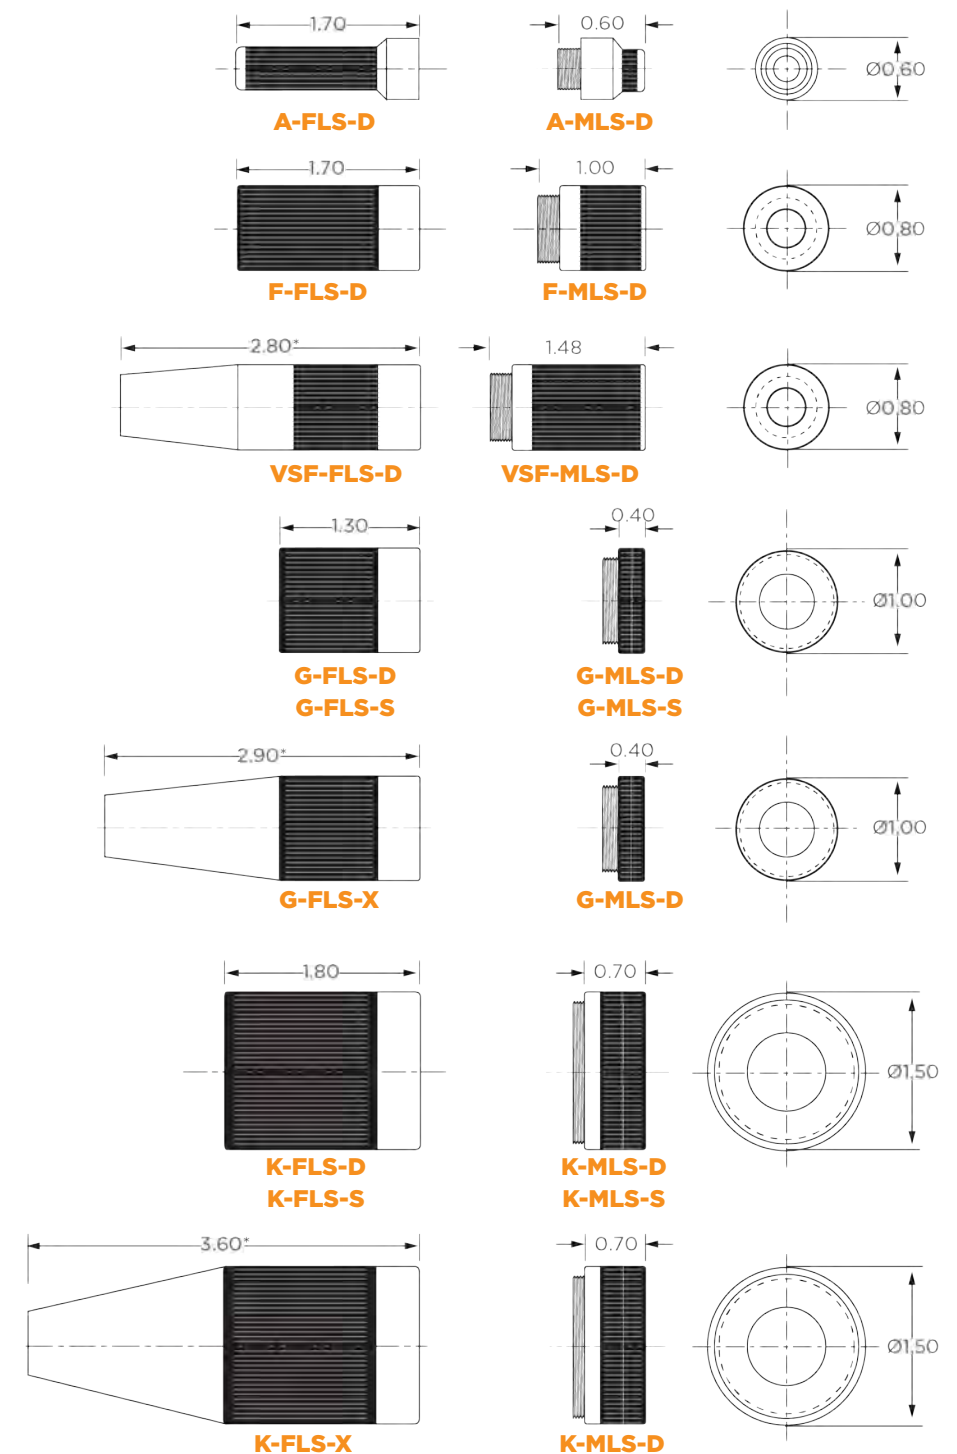

Note:


- * VSF-FLS-D, G-FLS-X, K-FLS-X length will vary, depending on cable diameter.



RMA-FS and Associated Parts


Standard Rubber Molded

IN-LINE SERIES

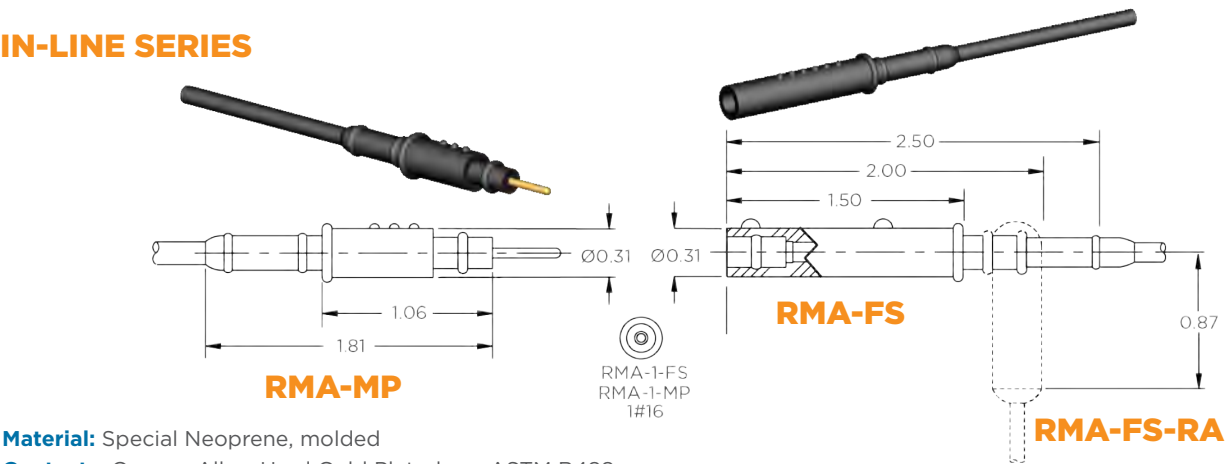

Material: Special Neoprene, molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM B488
Cable: 1 N 2
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

SLIP-ON SERIES

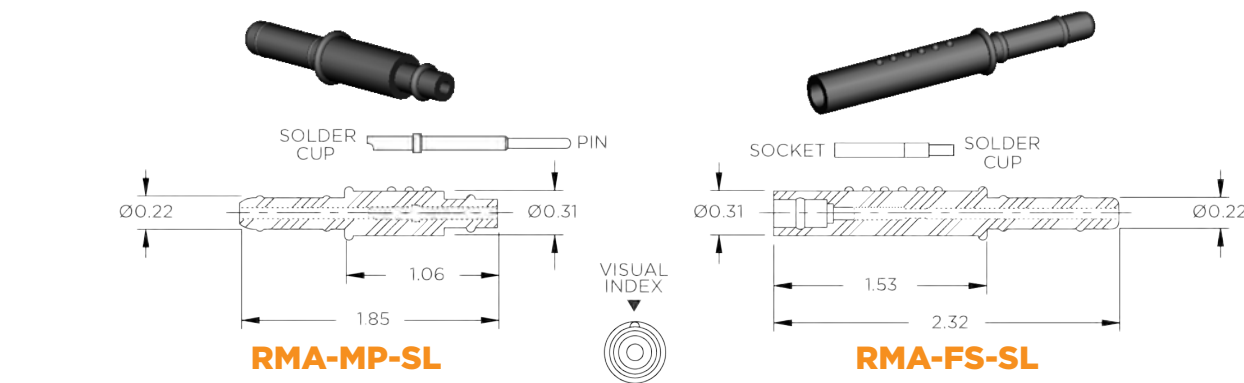

Material: Special Neoprene, molded
Contacts: Brass, Hard Gold Plated per ASTM-B-488
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For
A-MLS-D	RMA-MP, RMA-MP-SL
A-FLS-D	RMA-FS, RMA-FS-R/A, RMA-MP-SL

Dummy Connector	Mates To
RMA-FSD	RMA-MP
RMA-MPD-LP/HP	RMA-FS & RMA-FS-R/A

- Specify number of conductors when ordering
- Material:** Special Neoprene, molded
Mated Pressure Rating:
- RMA-FSD: 20,000 psi
 - RMA-MPD-LP: <4,000 psi
 - RMA-MPD-HP: 4,000 – 20,000 psi (male contact required)

Note:

- Specify exact wire diameter when ordering. Maximum wire DIA=0.09 inch.




RMA-FS and Associated Parts

Mateable Bulkhead Connectors

RMA-BCL


Special insulating neoprene is compression molded to the metal body forming a reliable seal. The metal body can be made of stainless steel, aluminum or other metals. This connector utilizes a facial o-ring seal to the bulkhead.

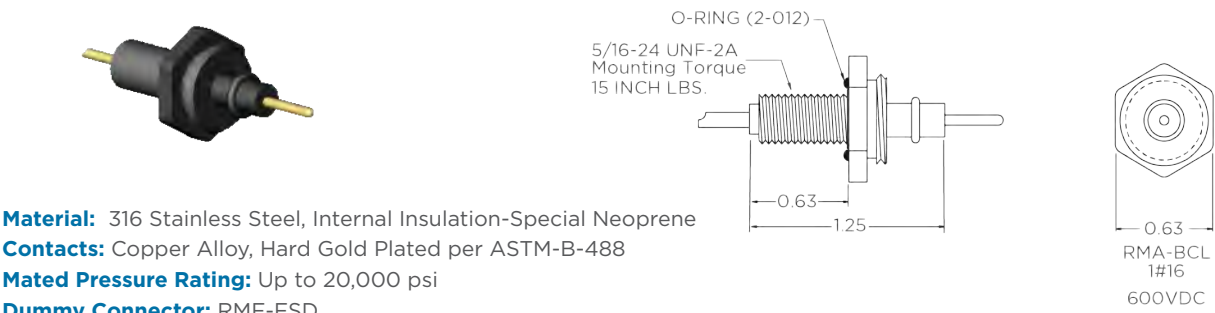

Material: 316 Stainless Steel, Internal Insulation-Special Neoprene
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: RMF-FSD

XSA-BC


The smallest standard connector in our non-metallic series, features an o-ring in the thread relief area. Available in single contact.

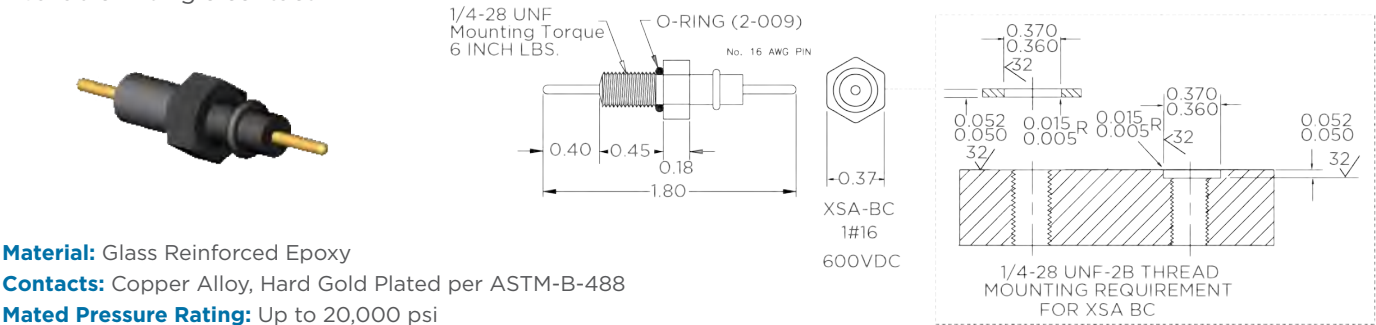

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: RMF-FSD

XSA-BCL

These are miniature, single contact connectors which feature a locking sleeve provision. The o-ring is located on a step under the hex and seals by flush mounting to the bulkhead.

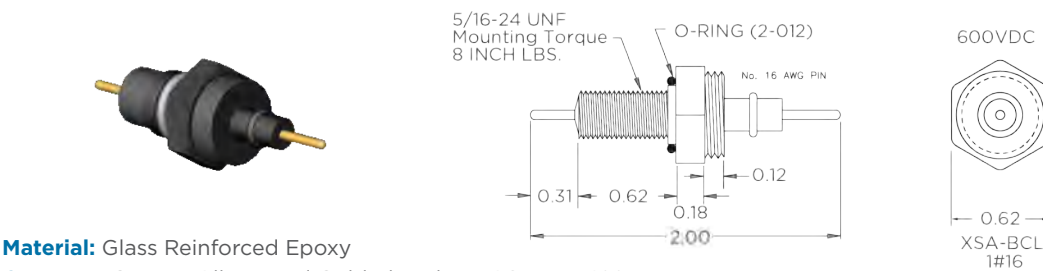

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: RMF-FSD

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




RMA-FS and Associated Parts

Mateable Bulkhead Connectors

XSB-BCL


A miniature connector body very similar to the XSA-BCL, but utilizes a smaller installation thread. The small thread size requires care in installation to help avoid damaging or cracking. The o-ring is located on a stop under the hex and seals by flush mounting to the bulkhead.

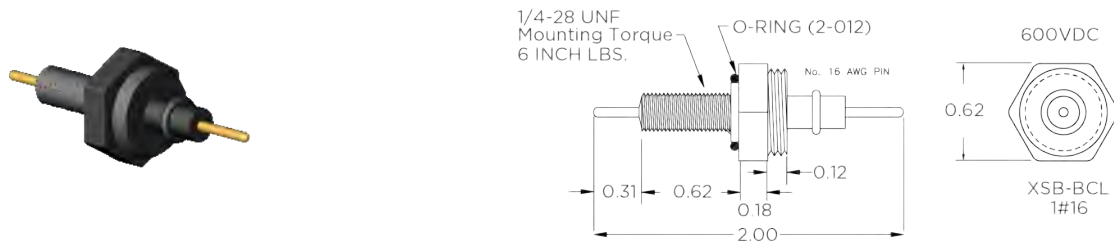

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: RMF-FSD

XSC-BC

These connectors feature a radial type o-ring seal, good for up to 10,000 psi, mated. Available only in single contact.

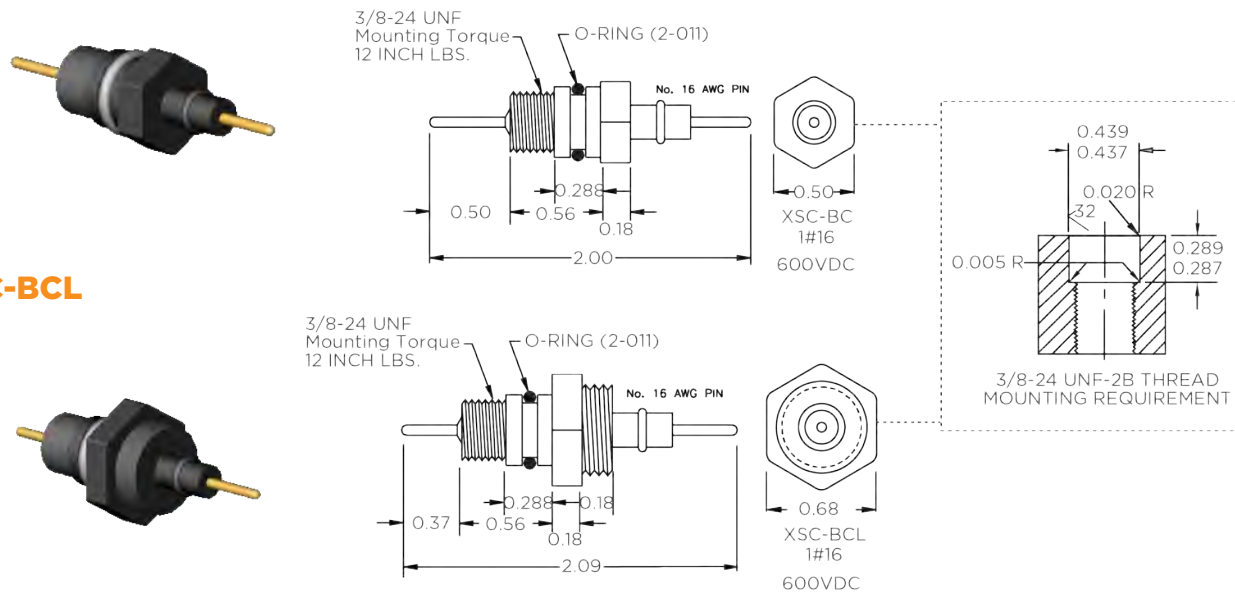

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 10,000 psi
Dummy Connector: RMA-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



VMA-FS and Associated Parts


Reversed Rubber Molded

IN-LINE SERIES

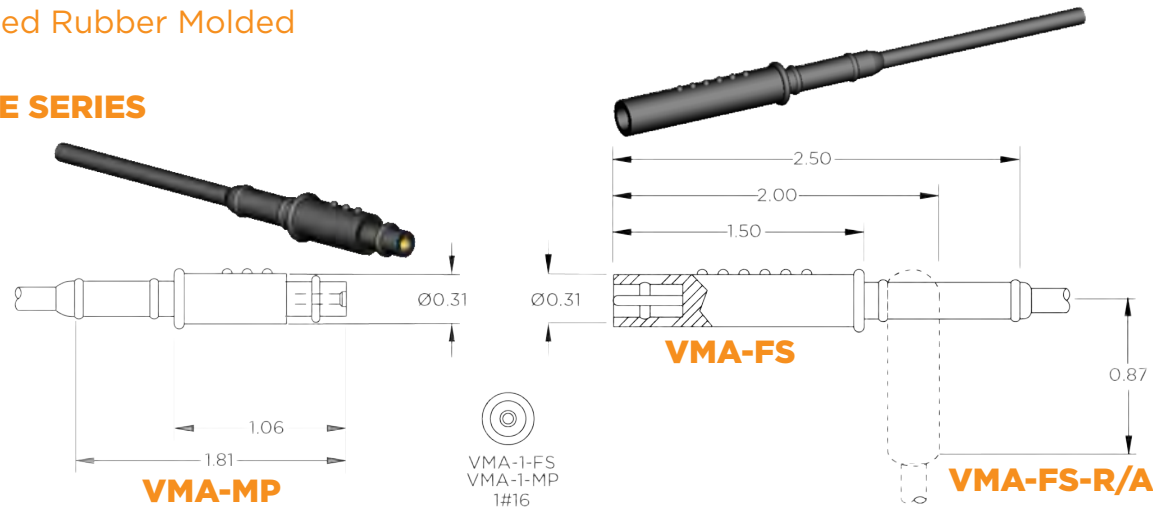

Material: Special Neoprene, Molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM B488
Cable: 1 N 2
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

SLIP-ON SERIES

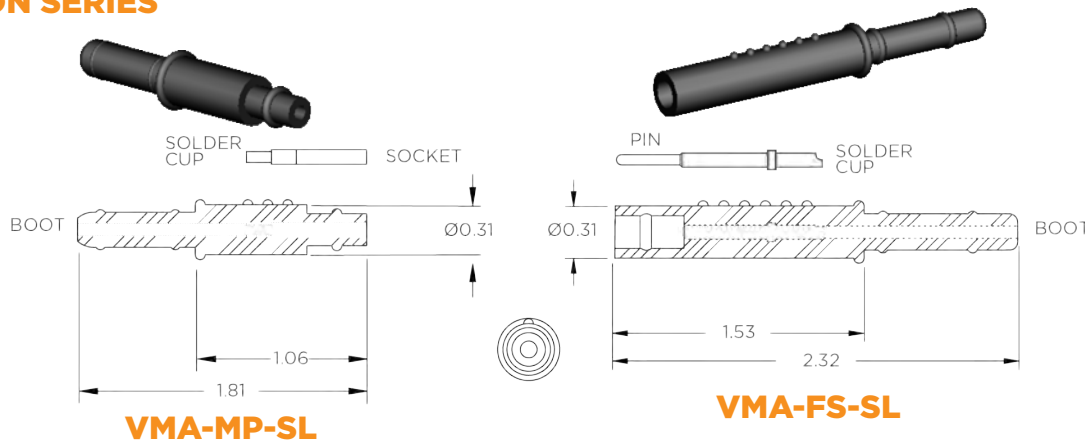

Material: Special Neoprene, Molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For	Dummy Connector	Mates To
A-MLS-D	VMA-MP, VMA-MP-SL	VMA-MPD	VMA-FS, VMA-FS-R/A
A-FLS-D	VMA-FS, VMA-FS-R/A, VMA-FS-SL	VMA-FSD-LP/HP	VMA-MP

- Specify number of conductors when ordering
- Material:** Special Neoprene, molded
- Mated Pressure Rating:**
 - VMA-MPD: 20,000 psi
 - VMA-FSD-LP: <4,000 psi (connector body W/O male pin)
 - VMA-FSD-HP: 4,000 – 20,000 psi

Note:

- Specify exact wire diameter when ordering. Maximum wire DIA=0.09 inch.




VMA-FS and Associated Parts

Mateable Bulkhead Connectors

VMA-BCL

Special insulating neoprene is compression molded to the metal body forming a reliable seal. The metal body can be made of stainless steel, aluminum or other metals. This connector utilizes a facial o-ring to seal to the bulkhead.

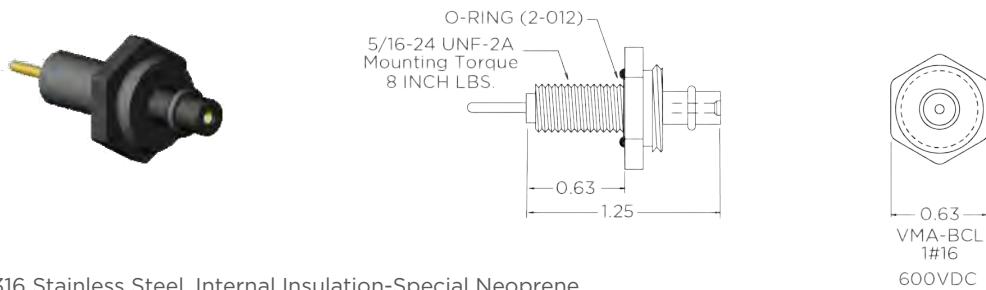

Material: 316 Stainless Steel, Internal Insulation-Special Neoprene


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi

Dummy Connector: VMA-FSD-HP or VMA-FSD-LP

VSA-BC

The smallest standard connector in our non-metallic series, features an o-ring in the thread relief area. Available in single contact.

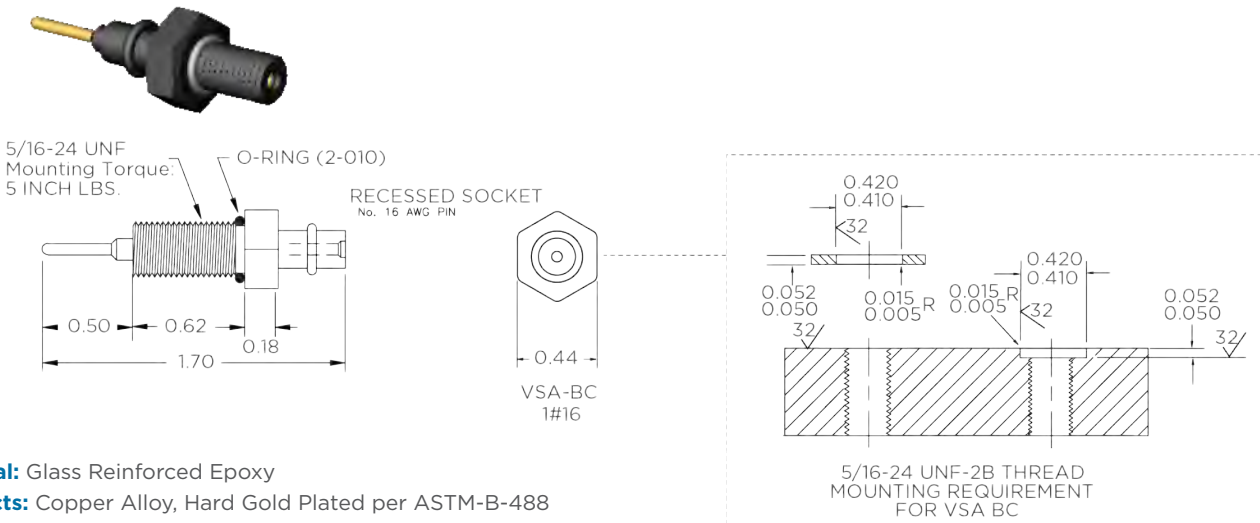

Material: Glass Reinforced Epoxy

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi

Dummy Connector: VMA-FSD-HP or VMA-FSD-LP

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




VMA-FS and Associated Parts

Mateable Bulkhead Connectors

VSA-BCL

Miniature single contact connectors which feature a locking sleeve provision. The o-ring is located on a step under the hex and seals by flush mounting to the bulkhead.

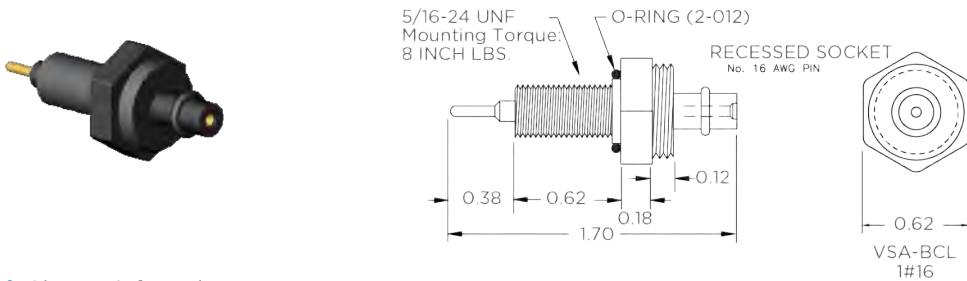

Material: Glass Reinforced Epoxy


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi

Dummy Connector: VMA-FSD-HP or VMA-FSD-LP

VSB-BCL

This is a miniature connector body very similar to the VSA-BCL, but utilizes a smaller installation thread. The small thread size requires care in installation to help avoid damaging or cracking. The o-ring is located on a stop under the hex and seals by flush mounting to the bulkhead.

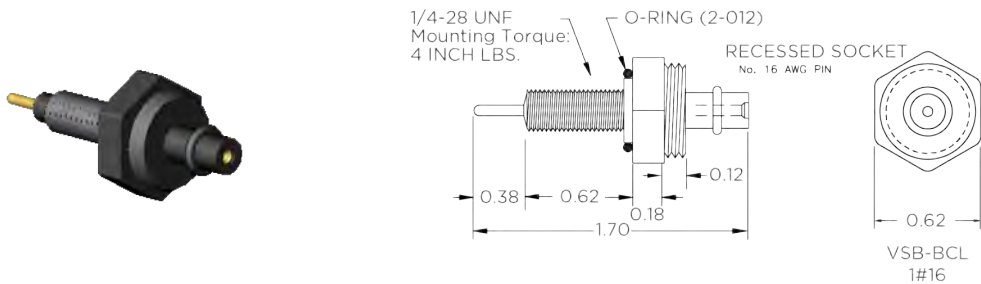

Material: Glass Reinforced Epoxy

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi

Dummy Connector: VMA-FSD-HP or VMA-FSD-LP

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



RMF-FS and Associated Parts

Standard Rubber Molded

IN-LINE SERIES

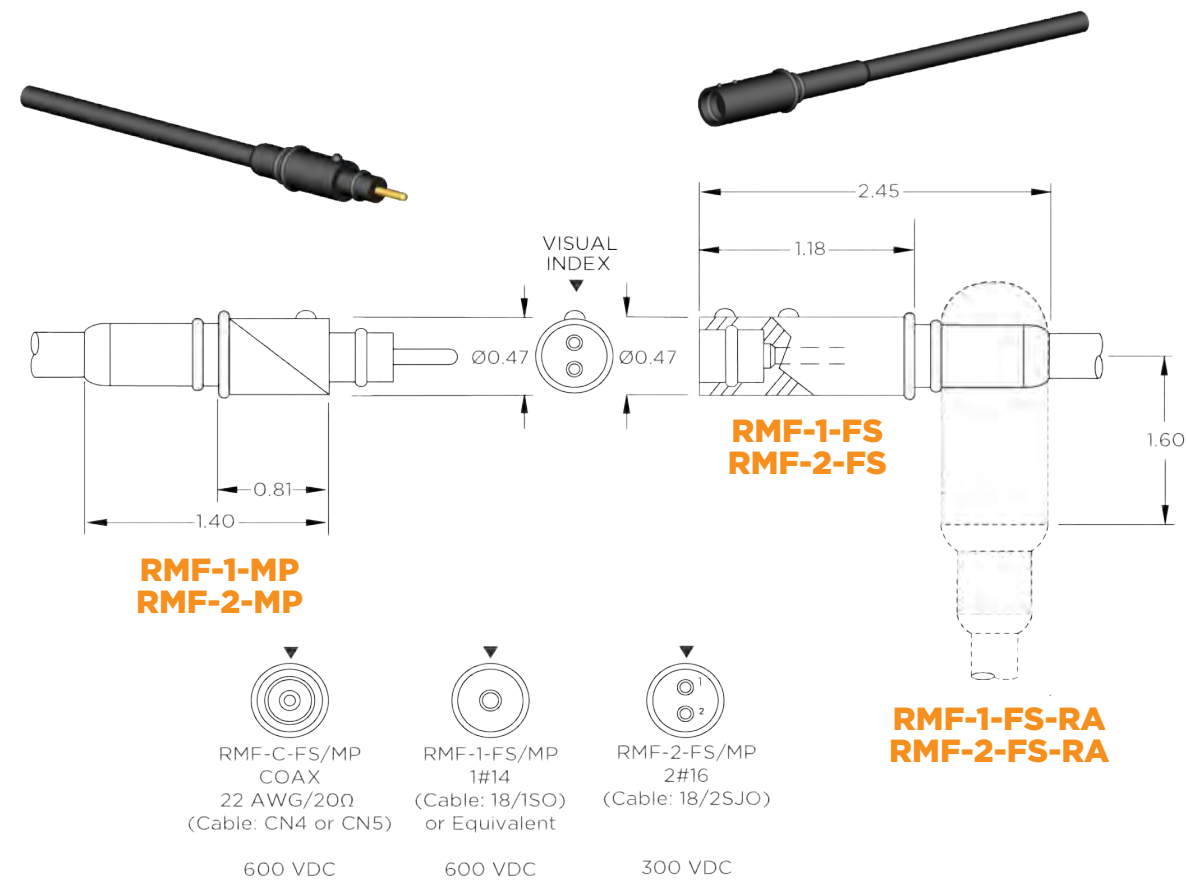

Material: Special Neoprene, Molded

Contacts: Copper Alloy, Hard Gold Plated per ASTM B488

Voltage Rating: See specific configuration

Mated Pressure Rating: Up to 10,000 psi

Locking Sleeve	Available For
F-MLS-D	RMF-MP
XS-FLS-D	RMF-FS, RMF-FS-R/A

Dummy Connector	Mates To
RMF-FSD	RMF-MP
RMF-MPD-HP/LP	RMF-FS, RMF-FS-R/A

- Specify number of conductors when ordering

Material: Special Neoprene, molded

Mated Pressure Rating:

- RMF-FSD: 10,000 psi
- RMF-MPD-HP: High Pressure, 4,000-10,000 psi, contact required
- RMF-MPD-LP: Low Pressure, $\leq 4,000$ psi, no contact required

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




RMF-FS and Associated Parts

Mateable Bulkhead Connectors

XSF-BC

Features radial o-ring seal.

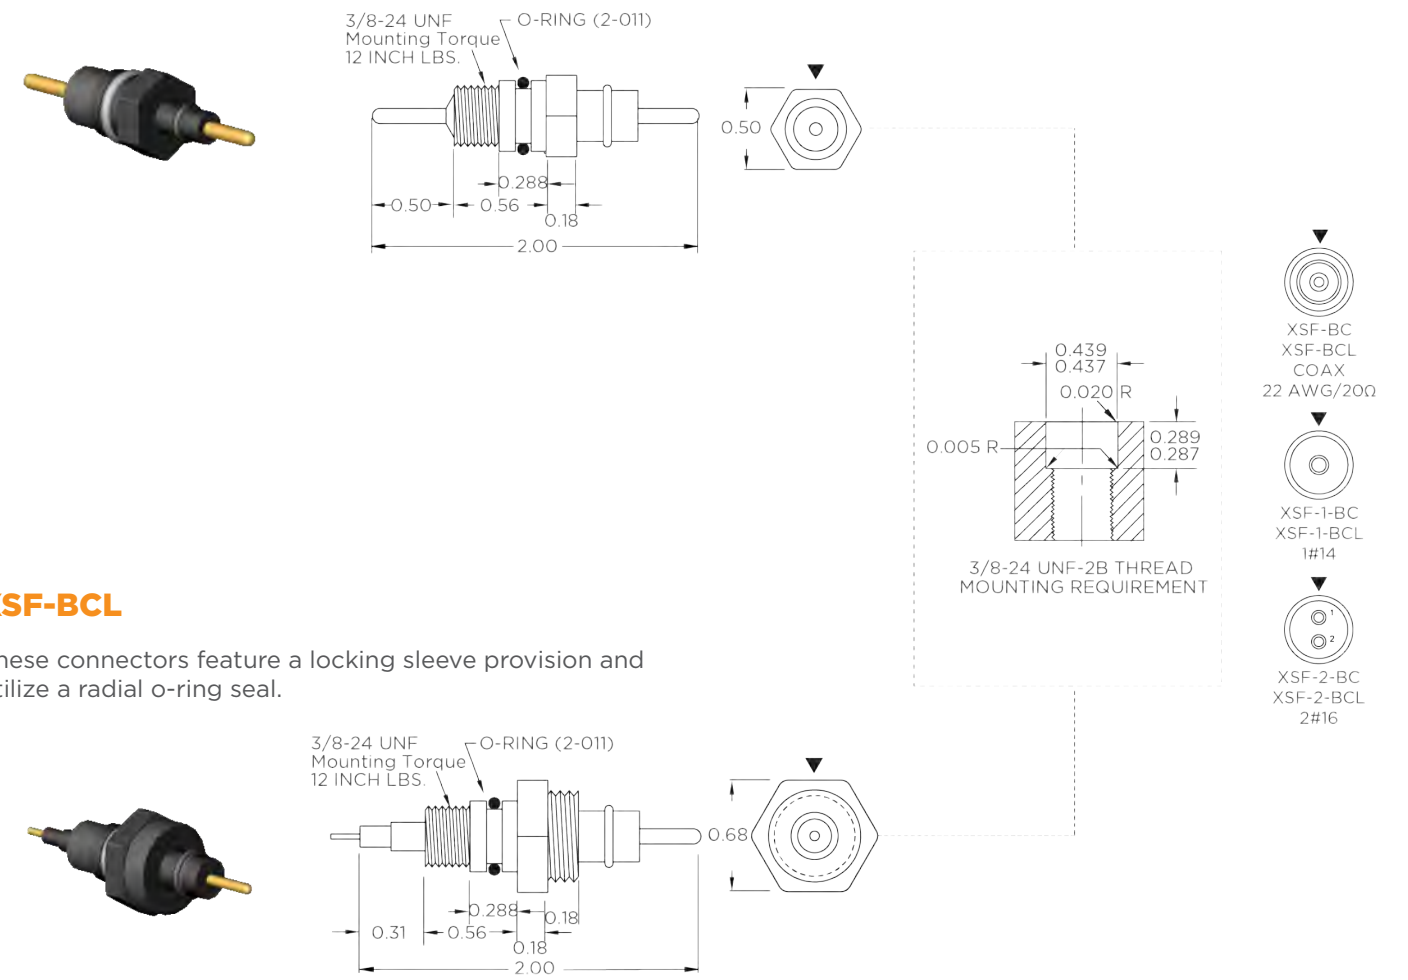

XSF-BCL

These connectors feature a locking sleeve provision and utilize a radial o-ring seal.

Material: Glass Reinforced Epoxy

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 10,000 psi

Dummy Connector: RMF-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



VMF-FS & Associated Parts

Reversed Rubber Molded

IN-LINE SERIES

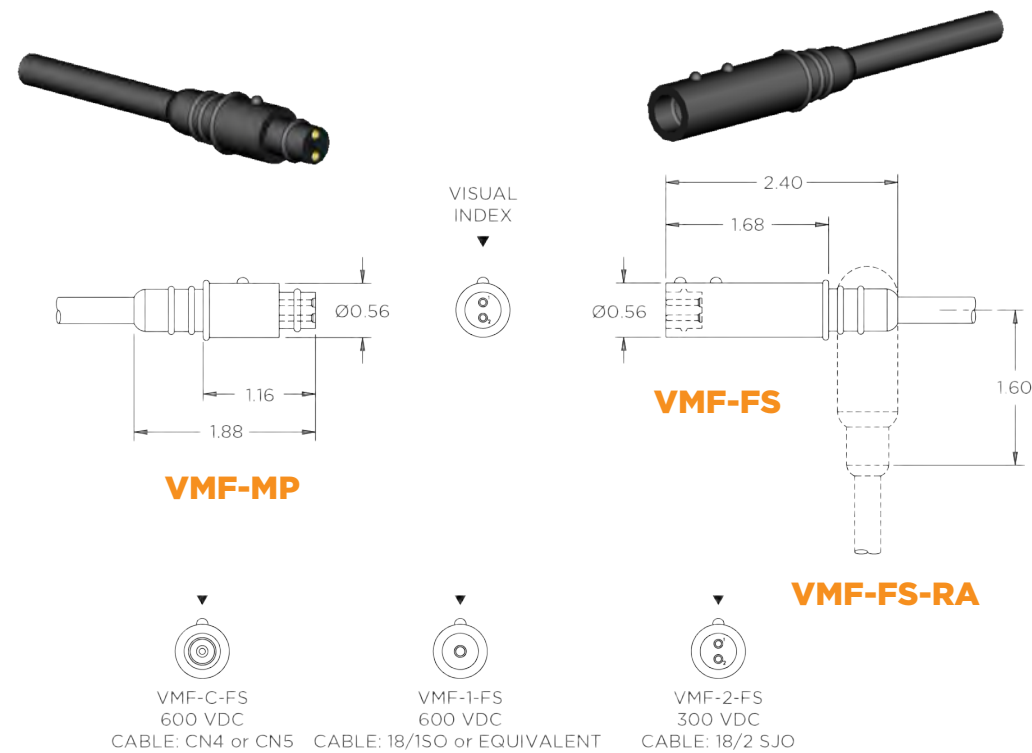

Material: Special Neoprene, Molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating: See specific configuration
Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For
VSF-MLS-D	VMF-MP
VSF-FLS-D	VMF-FS, VMF-FS-R/A

Dummy Connector	Mates To
VMF-MPD	VMF-FS, VMF-FS-R/A
VMF-FSD-LP/HP	VMF-MP

- Specify number of conductors when ordering
- Material:** Special Neoprene, molded
- Mated Pressure Rating:**
 - VMF-MPD: 10,000 psi
 - VMF-FSD-HP: High Pressure, 4,000-10,000 psi, contact required
 - VMF-FSD-LP: Low Pressure, ≤ 4,000 psi, no contact required

Note:

- Specify exact wire diameter when ordering. Maximum wire DIA=0.09 inch.




VMF-FS & Associated Parts

Mateable Bulkhead Connectors

VMF-BCL


Special insulating neoprene is permanently molded to the metal shell. These types of connectors are used where physical abuse may be too great for the non-metallic (glass reinforced epoxy) series.

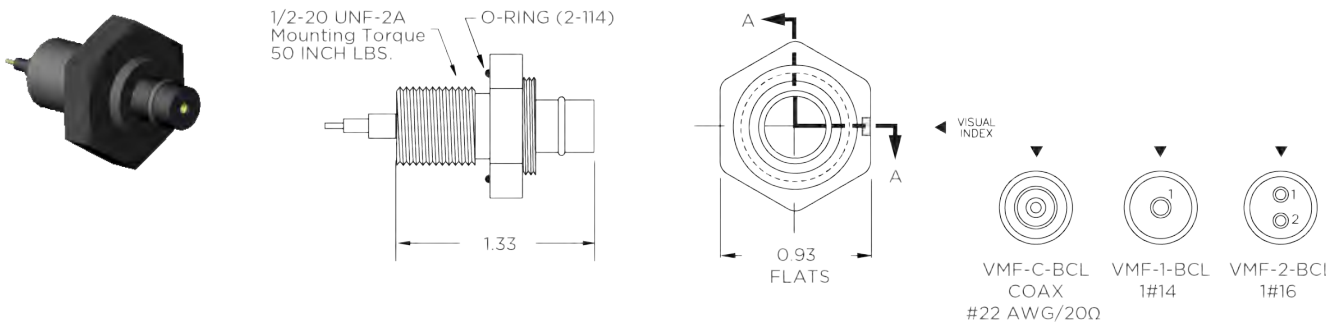

Material: 316 Stainless Steel
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: VMF-FSD

VSF-BCL

Available in coax, 1 and 2 contacts, features a facial o-ring seal to the bulkhead.

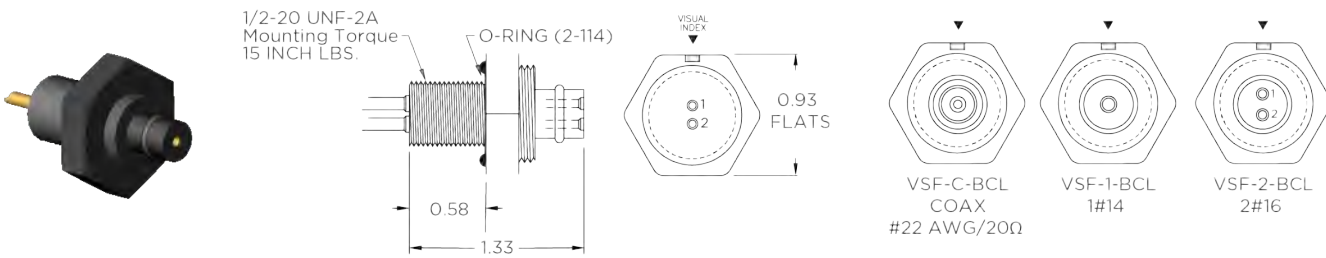

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: VMF-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



LMG-FS & Associated Parts

Standard Rubber Molded

IN-LINE SERIES

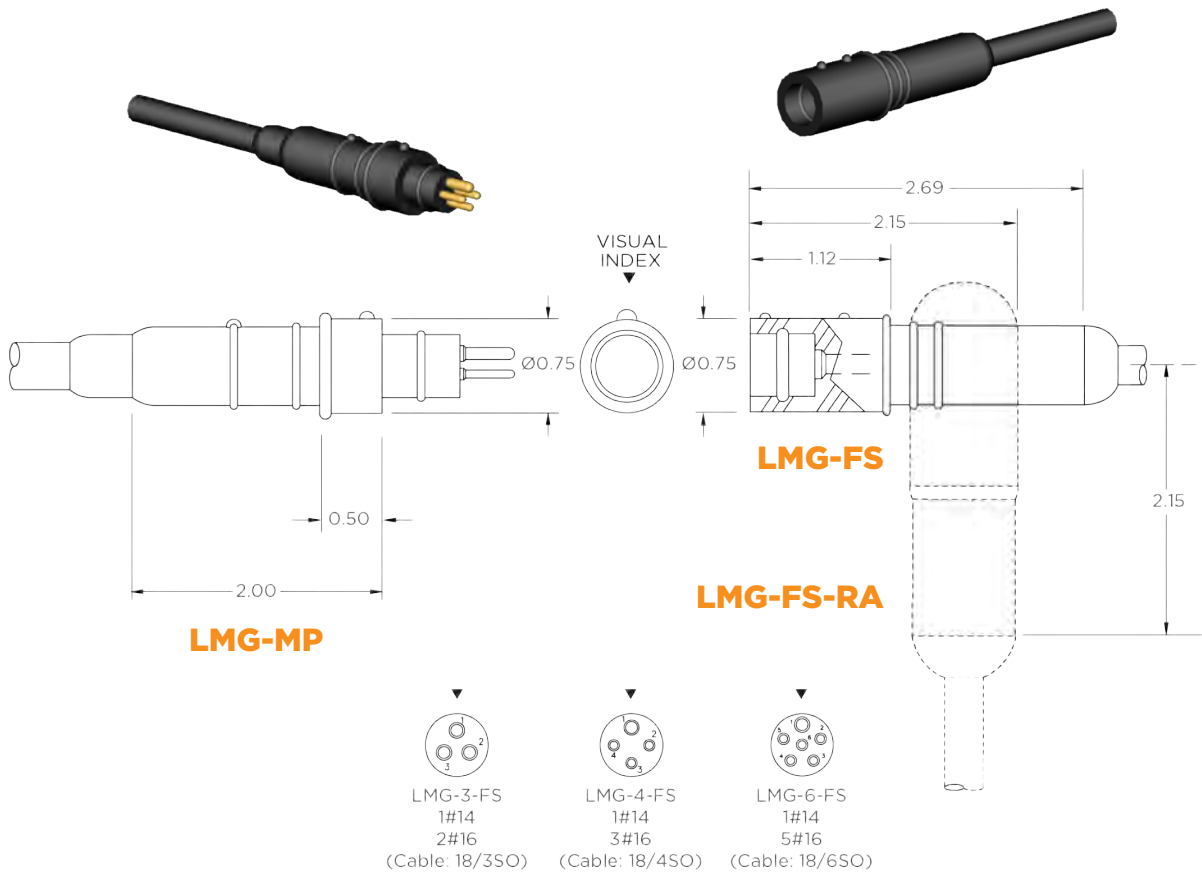

Material: Special Neoprene, Molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For	Dummy Connector	Mates To
G-MLS-D	LMG-MP	LMG-FSD	LMG-MP
G-FLS-D	LMG-FS, LMG-FS-R/A	LMG-MPD-LP/HP	LMG-FS, LMG-FS-R/A

- Specify number of conductors when ordering
- Material:** Special Neoprene, molded
- Mated Pressure Rating:**
 - LMG-FSD: 20,000 psi
 - LMG-MPD-HP: High Pressure, 4,000-20,000 psi, contact required
 - LMG-MPD-LP: Low Pressure, ≤ 4,000 psi, no contact required




LMG-FS and Associated Parts

Mateable Bulkhead Connectors

LSG-BC, LSG-BCL


These non-metallic connectors utilize a facial o-ring seal to the bulkhead. The LSG-BCL has a locking sleeve provision.

LSG-3-BC

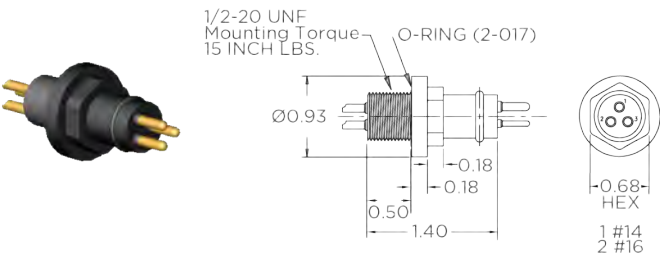


- Does not mate to RMG-FS or RMG-FS-R/A

LSG-4-BC

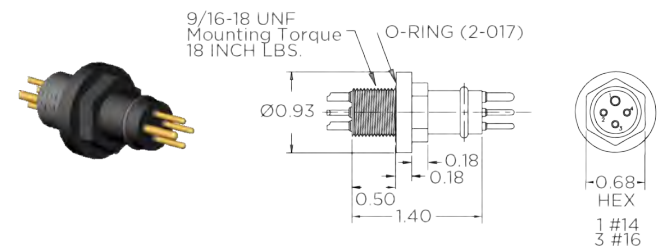

- Does not mate to RMG-FS or RMG-FS-R/A

LSG-6-BC

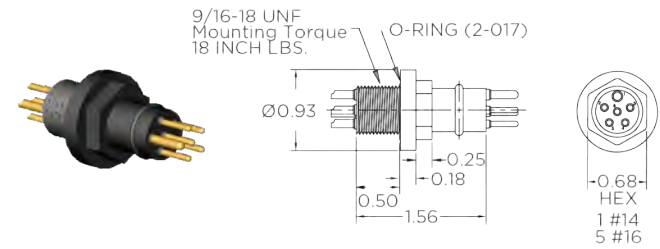


- Also mates to RMG-FS or RMG-FS-R/A

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 3,000 psi
Dummy Connector: LMG-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.

LSG-3-BCL

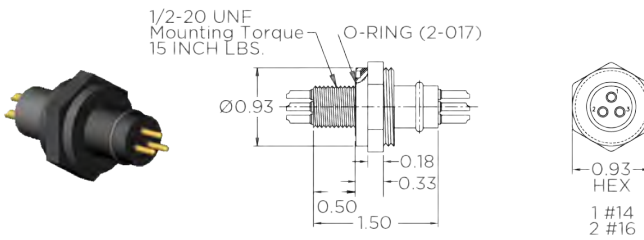


- Does not mate to RMG-FS or RMG-FS-R/A

LSG-4-BCL

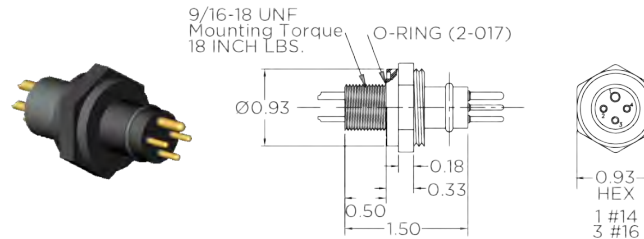

- Does not mate to RMG-FS or RMG-FS-R/A

LSG-6-BCL

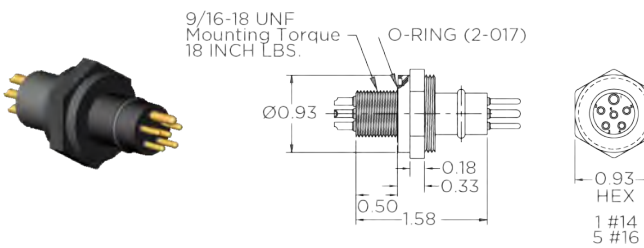

- Also mates to RMG-FS or RMG-FS-R/A




LMG-FS & Associated Parts

Mateable Bulkhead Connectors

LSG-BC-HP

These non-metallic connectors feature a facial o-ring seal to the bulkhead.

LSG-3-BC-HP

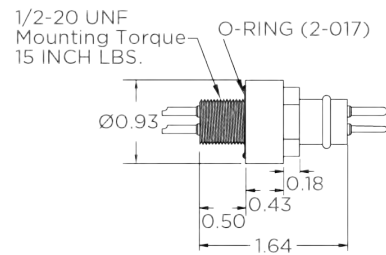

- Does not mate to RMG-FS or RMG-FS-R/A

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 10,000 psi
Dummy Connector: LMG-FSD

Note:
• Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




LMG-FS & Associated Parts

Mateable Bulkhead Connectors

LSG-BC-HP


These non-metallic connectors feature a facial o-ring seal to the bulkhead.

LSG-4-BC-HP

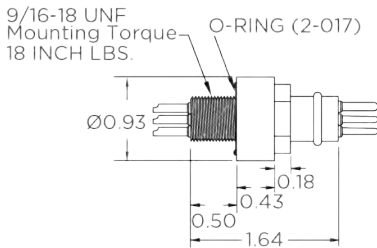

- Does not mate to RMG-FS or RMG-FS-R/A

LSG-6-BC-HP

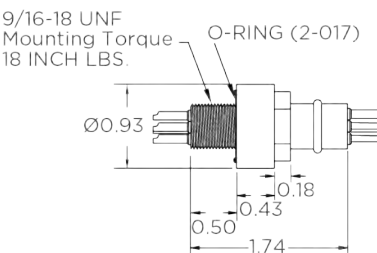

- Also mates to RMG-FS or RMG-FS-R/A

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 10,000 psi
Dummy Connector: LMG-FSD

Note:
• Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




RMG-FS & Associated Parts

Standard Rubber Molded

IN-LINE SERIES

- Available with grippers, must specify.

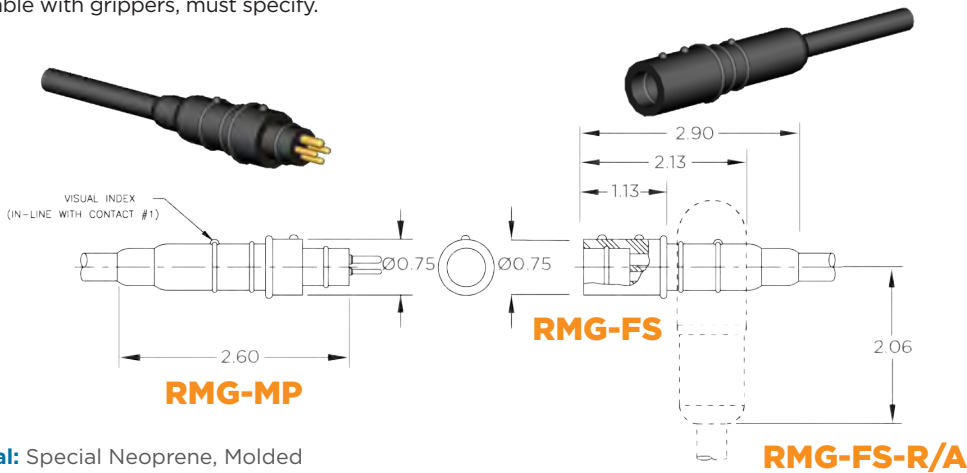

Material: Special Neoprene, Molded


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Voltage Rating: 600 VDC. Contact TE for higher voltage requirements

Mated Pressure Rating: Up to 20,000 psi

WOC CONNECTORS - RMG-FS-WOC, RMG-MP-WOC

WOC stands for “without cable.” The connectors are supplied as shown below for installation in the field and/or to non-neoprene jacketed cables, Bonding can be achieved by molding to the connectors shown using polyurethane with appropriate primers.

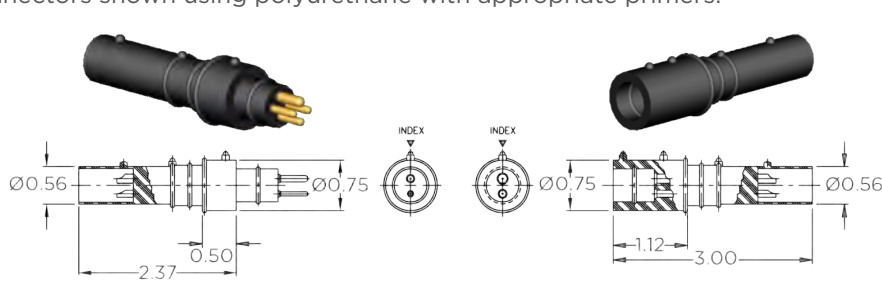

Material: Special Neoprene, Molded

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Voltage Rating: 600 VDC. Contact TE for higher voltage requirements

Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For	Dummy Connector	Mates To
G-MLS-D / G-MLS-S	RMG-MP, RMG-MP WOC	RMG-FSD	RMG-MP, BCL & XSG-BCL, XSG-PBC, XSG-PBCL, XSG-PBCLM
G-FLS-D / G-FLS-S	RMG-FS, RMG-FS-R/A, RMG-FS-WOC	RMG-MPD	RMG-FS & RMG FS-R/A
G-FLS-X*	RMG-FS		

Note:

- * Must specify cable OD.

- Specify number of conductors when ordering

Material: Special Neoprene, molded.

Mated Pressure Rating:

- RMG-FSD: 20,000 psi
- RMG-MPD-HP: High Pressure, 4,000-20,000 psi, contact required
- RMG-MPD-LP: Low Pressure, ≤ 4,000 psi, no contact required




RMG-FS & Associated Parts

Mateable Bulkhead Connectors

RMG-BCL

Special Insulating neoprene is permanently molded to the metal shell. These types of connectors are used where physical abuse may be too great for the non-metallic (glass reinforced epoxy) series. The RMG-BCL has a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

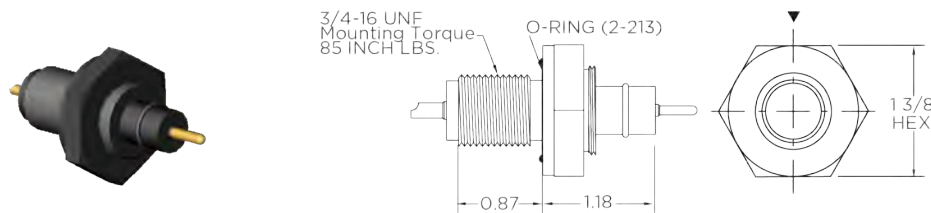

Material: 316 Stainless Steel, Internal Insulation-Special Neoprene


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi


Dummy Connector: RMG-FSD

XSG-BCL

One of our oldest connectors in the non-metallic series, with male pin as shown. Connector is one homogeneously molded unit available with different thread lengths as indicated. The XSG-BCL has a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

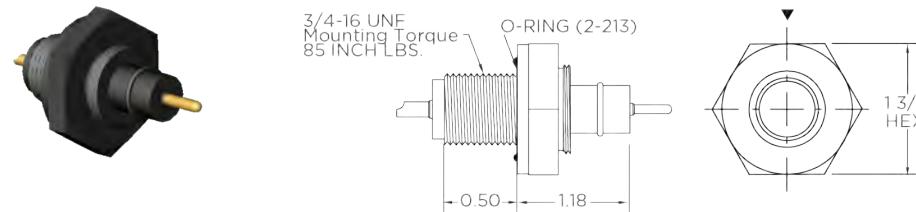

XSG-BCL-LT

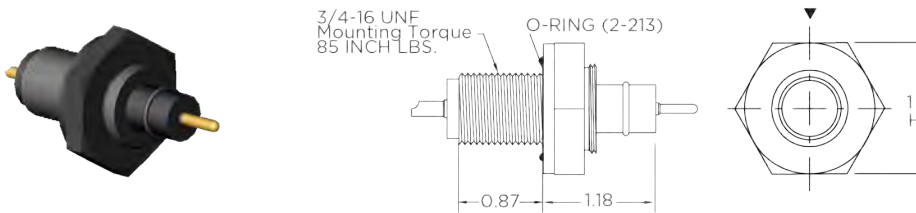

Material: Glass Reinforced Epoxy

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 3,000 psi

Dummy Connector: RMG-FSD

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.





RMG-FS & Associated Parts

Mateable Bulkhead Connectors

XSG-BCL-P-R/A

A non-metallic low profile right angle bulkhead connector featuring a locking sleeve provision and utilizing a facial o-ring seal to the bulkhead.

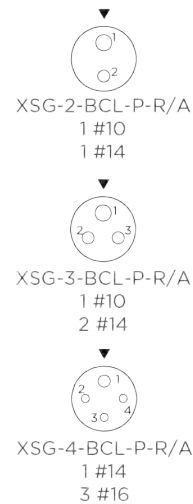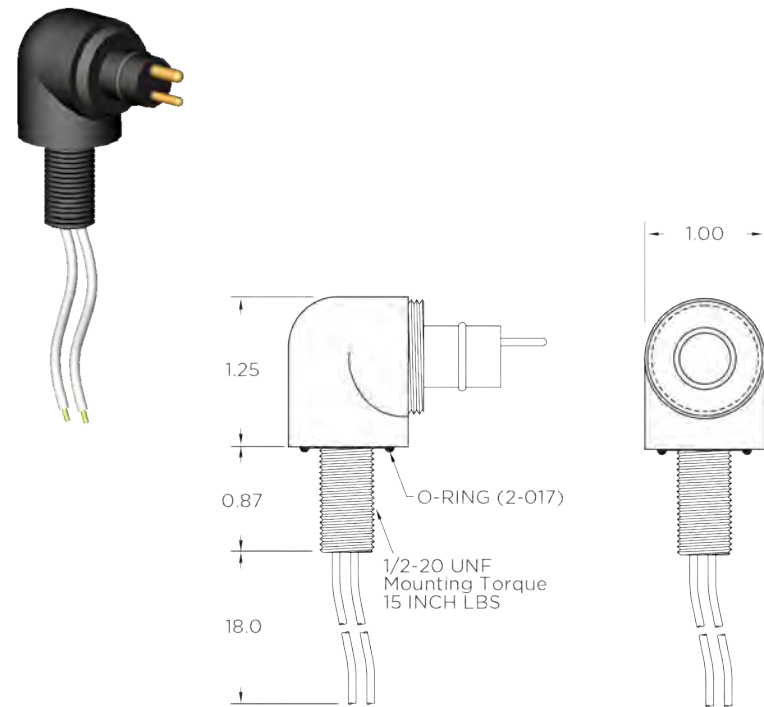

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Pigtails: Polyacetal insulated #18 AWG
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: RMG-FSD

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




RMG-FS & Associated Parts

Mateable Bulkhead Connectors


XSG-PBC

Small footprint non-metallic connector utilizing an o-ring in the thread relief area to seal to the bulkhead.

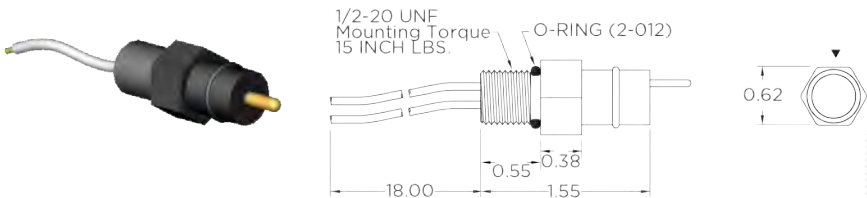


XSG-PBCL

Small footprint non-metallic connector utilizing an o-ring in the thread relief area to seal to the bulkhead. Features a locking sleeve provision.

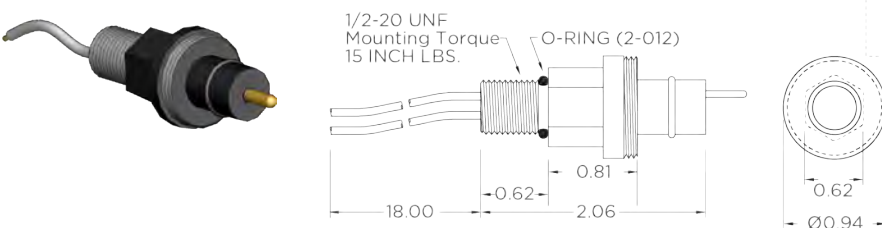

XSG-PBCLM

Non-metallic connector utilizing a facial o-ring seal to the bulkhead. Features a locking sleeve provision.

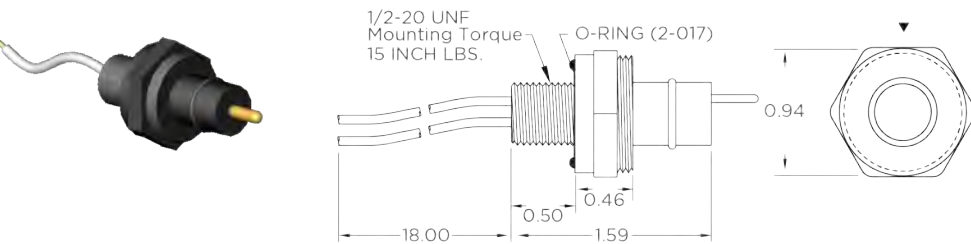

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Pigtails: Polyacetal insulated #18 AWG
Mated Pressure Rating: Up to 5,000 psi
Dummy Connector: RMG-FSD

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




RMG-FS & Associated Parts


Mateable Bulkhead Connectors

RMGS-BC

Features a stainless steel body, insulating neoprene, and pipe thread for sealing to bulkhead. No o-ring required for sealing.

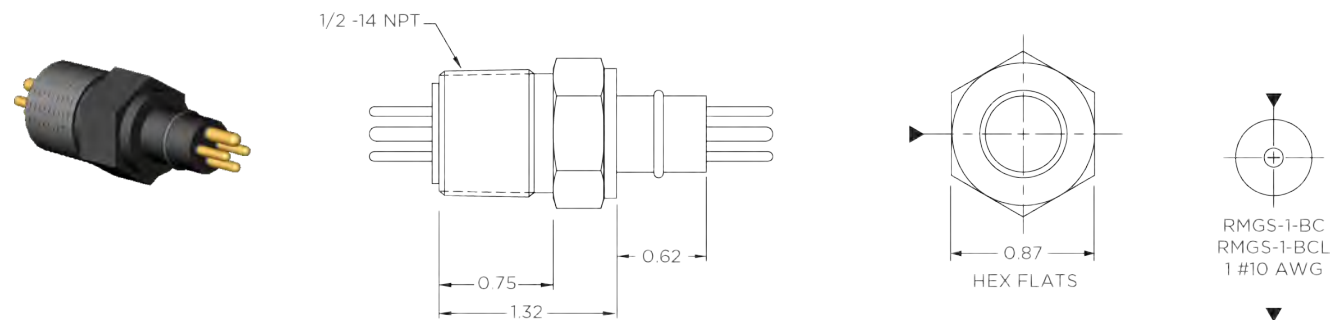**RMGS-BCL**

Features a stainless steel body, insulating neoprene, and pipe thread for sealing to bulkhead. No o-ring required for sealing. Features a locking sleeve provision.

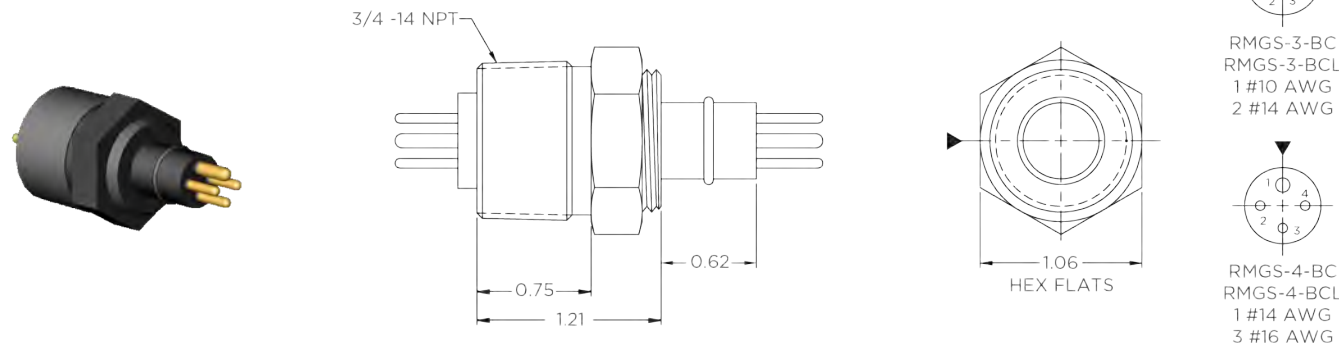

Material: 316 Stainless Steel

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 5,000 psi

Dummy Connector: RMG-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



VMG-FS & Associated Parts

Reversed Rubber Molded

IN-LINE SERIES

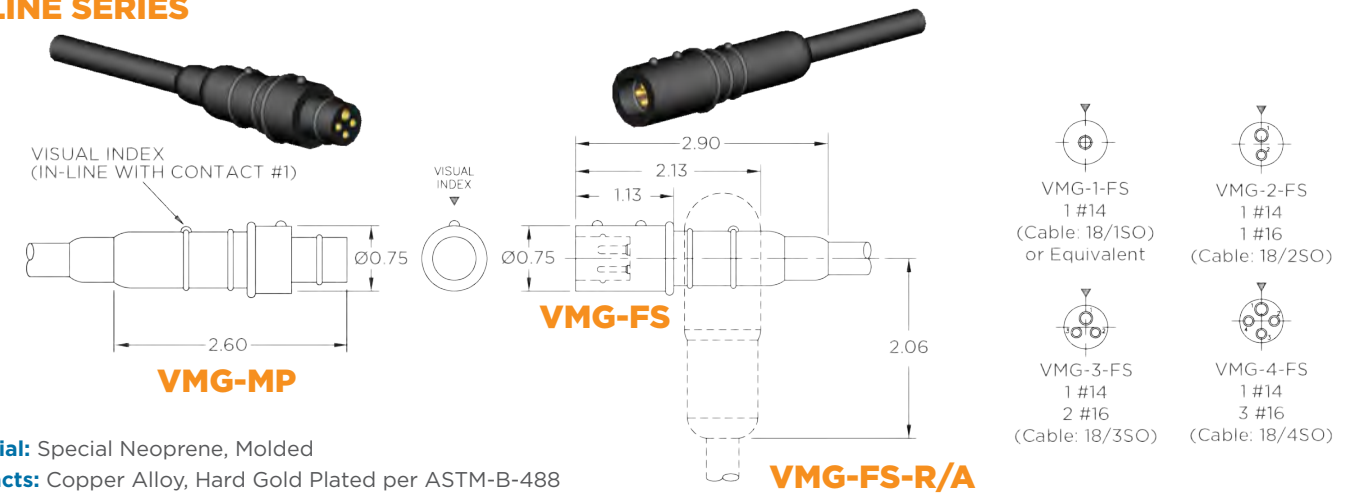

Material: Special Neoprene, Molded


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Voltage: 600 VDC. Contact TE for higher voltage requirements

Mated Pressure Rating: Up to 20,000 psi

WOC CONNECTORS - VMG-FS-WOC, VMG-MP-WOC

WOC stands for “without cable.” The connectors are supplied as shown below for installation in the field and/or to non-neoprene jacketed cables. Bonding can be achieved by molding to the connectors shown using polyurethane with appropriate primers.

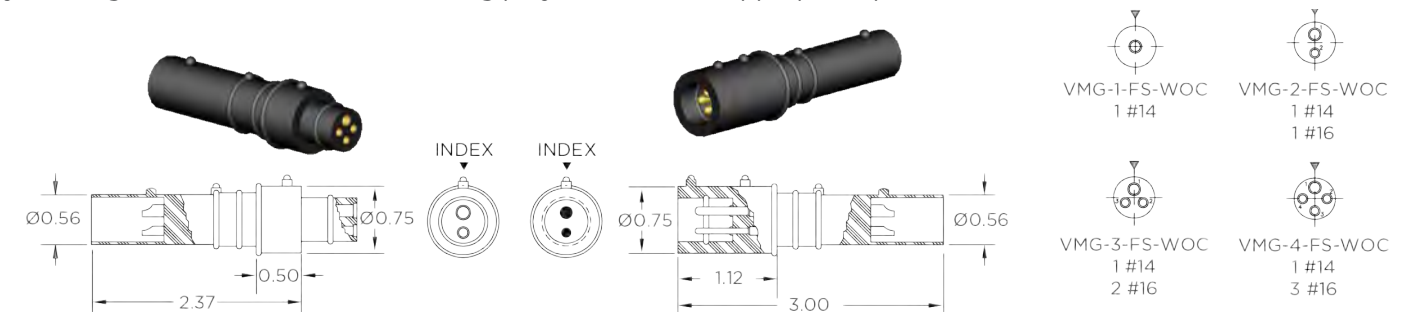

Material: Special Neoprene, Molded

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Voltage: 600 VDC. Contact TE for higher voltage requirements

Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For	Dummy Connector	Mates To
G-MLS-D	VMG-MP, VMG-MP-WOC	VMG-FSD	VMG-MP
G-FLS-D	VMG-FS, VMG-FS-R/A, VMG-FS WOC	VMG-MPD	VMG-FS & VMG-FS-R/A & VMG-FS WOC
G-FLS-X*	VMG-FS	• Specify number of conductors when ordering Material: Special Neoprene, molded	

- Specify number of conductors when ordering

Material: Special Neoprene, molded

Mated Pressure Rating:

- VMG-MPD: 20,000 psi

- VMG-FSD-HP: High Pressure, 4,000-20,000 psi, contact required

- VMG-FSD-LP: Low Pressure, $\leq 4,000$ psi, no contact required

Note:

- * Must specify cable OD.




VMG-FS & Associated Parts

Mateable Bulkhead Connectors

VMG-BCL


Special insulating neoprene is permanently molded to the metal shell. These types of connectors are used where physical abuse may be too great for the non-metallic (glass reinforced epoxy) series. The VMG-BCL features a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

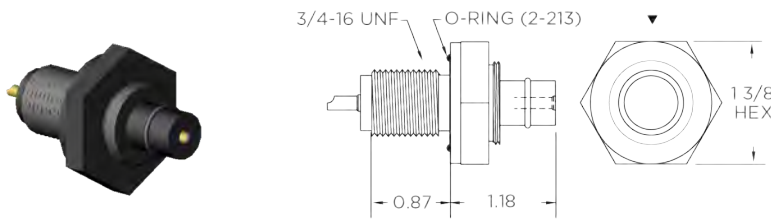


Material: 316 Stainless Steel, Internal Insulation-Special Neoprene
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: VMG-FSD

VSG-BCL

One of our oldest connectors in the non-metallic series, with female sockets as shown. Connector is one homogeneously molded unit available with different thread lengths as indicated. The VSG-BCL features a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

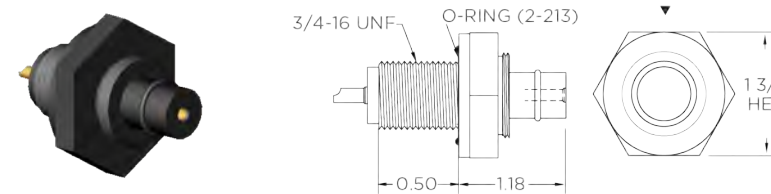

VSG-BCL-LT

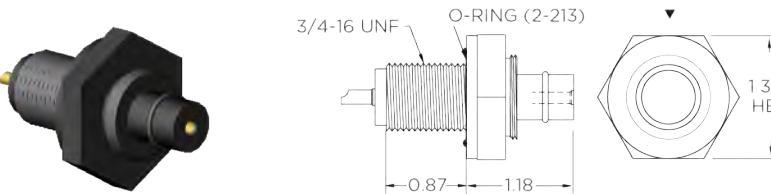

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: VMG-FSD

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




VMG-FS & Associated Parts

Mateable Bulkhead Connectors


VSG-PBC

Non-Metallic connector utilizing an o-ring in the thread relief area to seal the bulkhead.

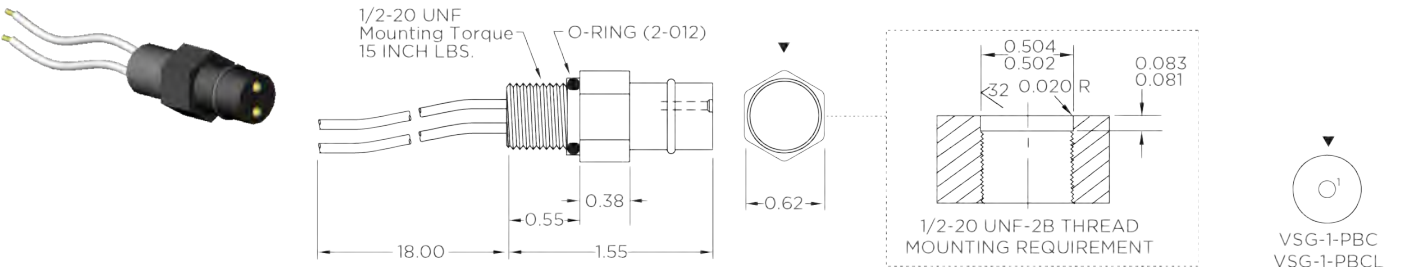


VSG-PBCL

Non-metallic connector that features a locking sleeve provision and utilizes an o-ring in the thread relief area to seal to the bulkhead.

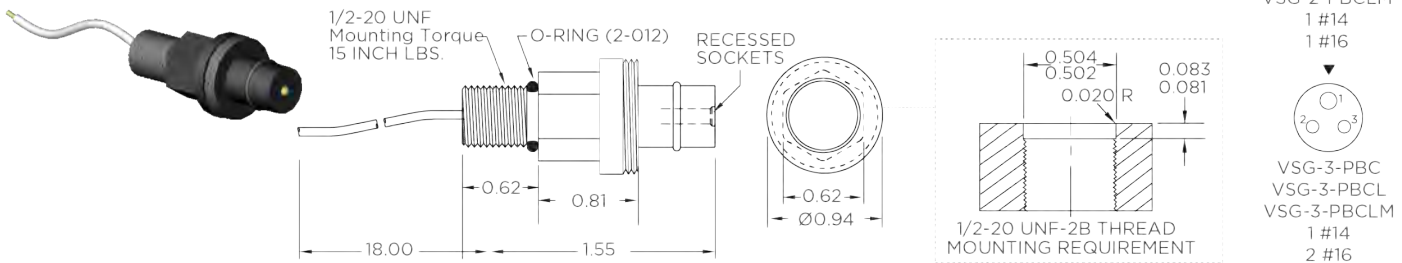

VSG-PBCLM

Non-Metallic connector featuring a locking sleeve provision. VSG-PBCLM utilizes a facial o-ring seal to the bulkhead.

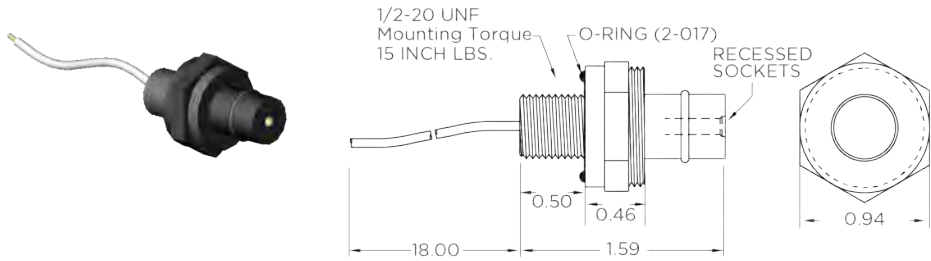

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Pigtails: Polyacetal insulated #18 AWG
Mated Pressure Rating: Up to 5,000 psi
Dummy Connector: VMG-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



RMK-FS & Associated Parts

Standard Rubber Molded

IN-LINE SERIES

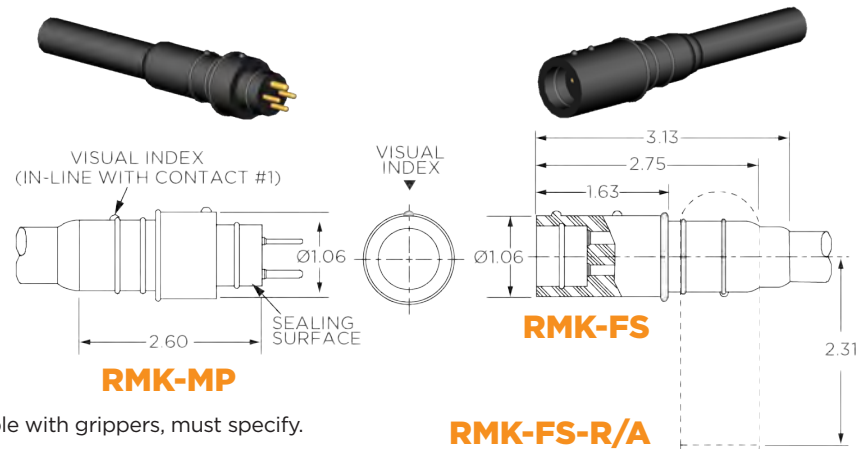

- Available with grippers, must specify.

Material: Special Neoprene, Molded


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Voltage Rating: 600 VDC. Contact TE for higher voltage requirements

Mated Pressure Rating: Up to 20,000 psi

WOC CONNECTORS - RMK-FS-WOC, RMK-MP-WOC

WOC stands for “without cable.” The connectors are supplied as shown below for installation in the field and/or to non-neoprene jacketed cables, Bonding can be achieved by molding to the connectors shown using polyurethane with appropriate primers.

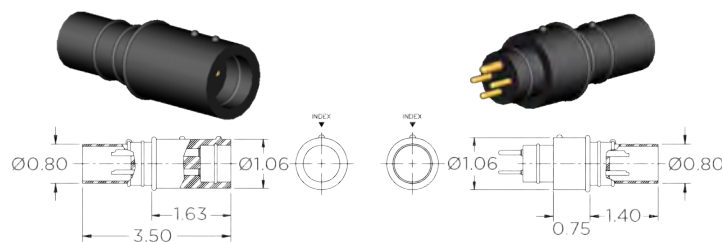

Material: Special Neoprene, Molded

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488



Voltage Rating: 600 VDC. Contact TE for higher voltage requirements

Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For
K-MLS-D / K-MLS-S	RMK-MP, RMK-MP-WOC
K-FLS-D / K-FLS-S	RMK-FS, RMK-FS -R/A, RMK-FS-WOC
K-FLS-X*	RMK-FS

Note:

- * Must specify cable OD.

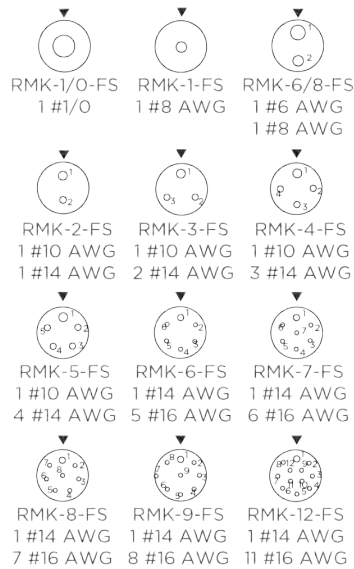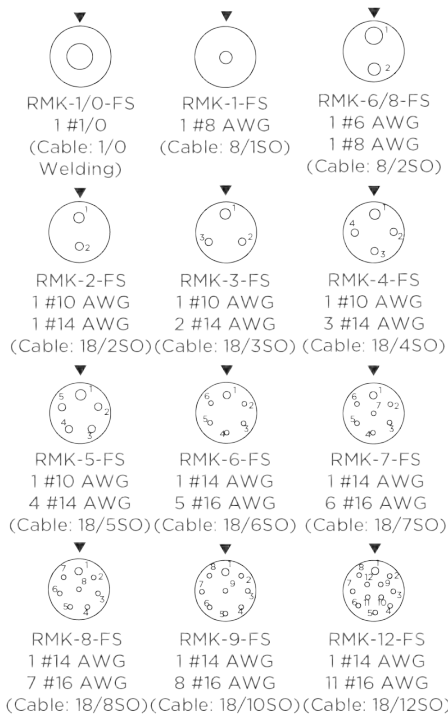

Dummy Connector	Mates To
RMK-FSD	RMK-MP
RMK-MPD	RMK-FS & RMK-FS-R/A & RMK-FS-WOC

- Specify number of conductors when ordering

Material: Special Neoprene, molded

Mated Pressure Rating:

- RMK-FSD: 20,000 psi
- RMK-MPD-HP: High Pressure, 4,000-20,000 psi, contact required
- RMK-MPD-LP: Low Pressure, ≤ 4,000 psi, no contact required




RMK-FS & Associated Parts

Mateable Bulkhead Connectors

RMK-BCL

Special Insulating neoprene is permanently molded to the metal shell. These types of connectors are used where physical abuse may be too great for the non-metallic (glass reinforced epoxy) series. The RMK-BCL has a locking sleeve provision and utilizes a facial O-ring seal to the bulkhead.

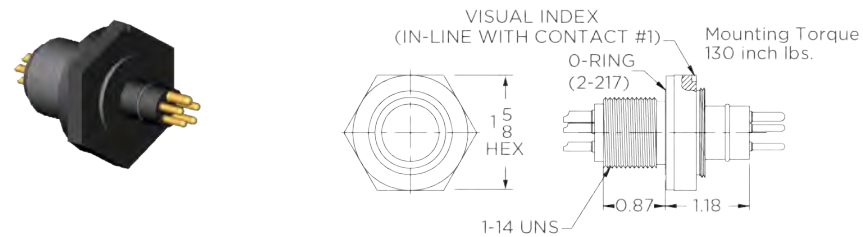

Material: 316 Stainless Steel, Internal Insulation-Special Neoprene


Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi


Dummy Connector: RMK-FSD

XSK-BCL

One of our oldest connectors in the non-metallic series, with male pin as shown. Connector is one homogeneously molded unit available with different thread lengths as indicated. The XSK-BCL has a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

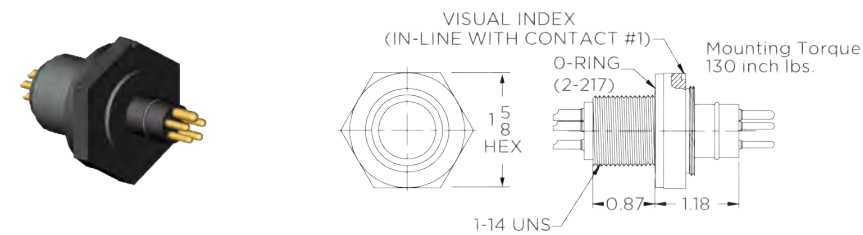

XSK-BCL-LT

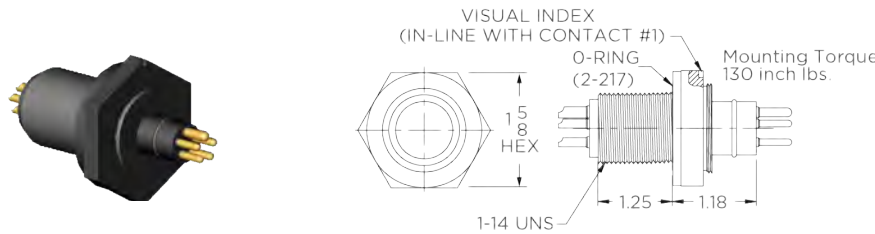

Material: Glass Reinforced Epoxy

Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488

Mated Pressure Rating: Up to 20,000 psi

Dummy Connector: RMK-FSD

Note:

- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.





RMK-FS & Associated Parts

Mateable Bulkhead Connectors

XSK-DEBCL

A non-metallic double ended connector which accepts a mating connector on either end. The same locking sleeve also mates to both ends. This connector utilizes a facial o-ring seal to the bulkhead.

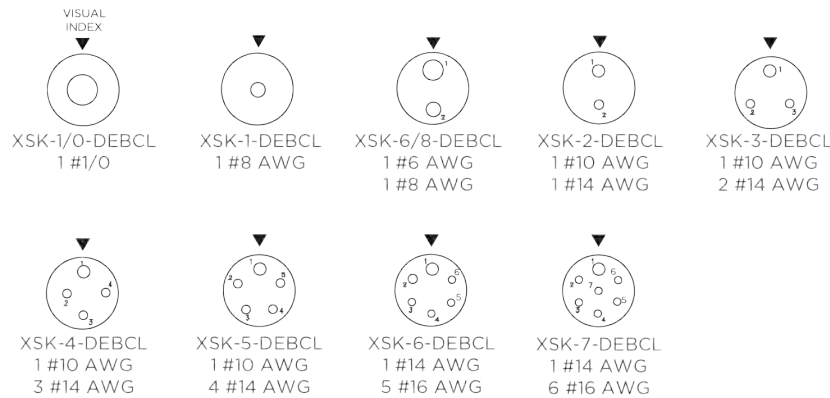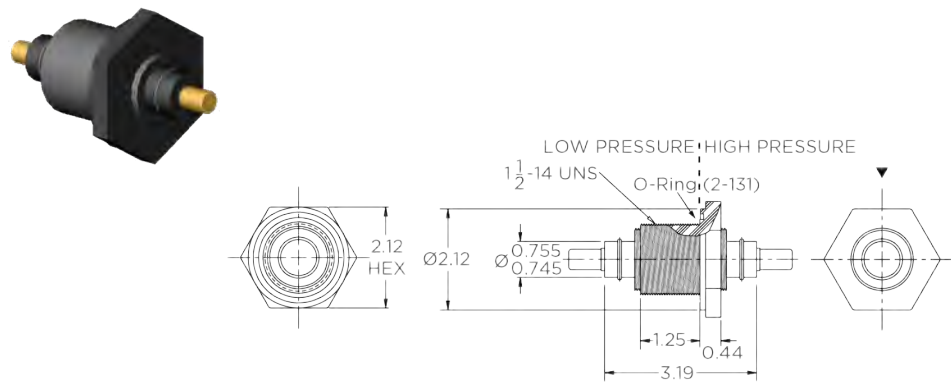

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: RMK-FSD


Note:
• Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.




VMK-FS & Associated Parts

Reversed Rubber Molded

IN-LINE SERIES

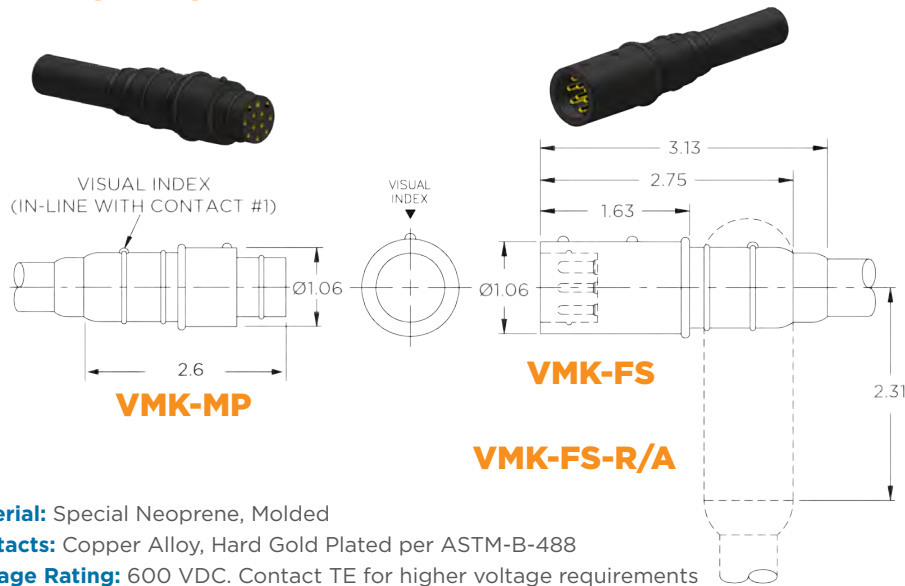


Material: Special Neoprene, Molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

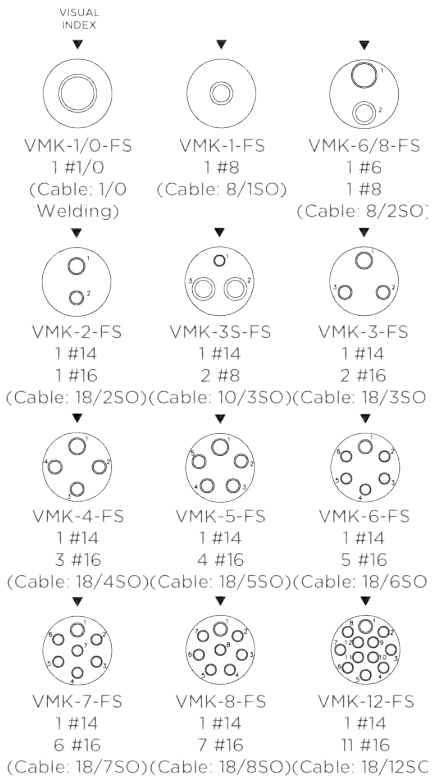

WOC CONNECTORS - VMK-FS-WOC, VMK-MP-WOC

WOC stands for “without cable.” The connectors are supplied as shown below for installation in the field and/or to non-neoprene jacketed cables, Bonding can be achieved by molding to the connectors shown using polyurethane with appropriate primers.

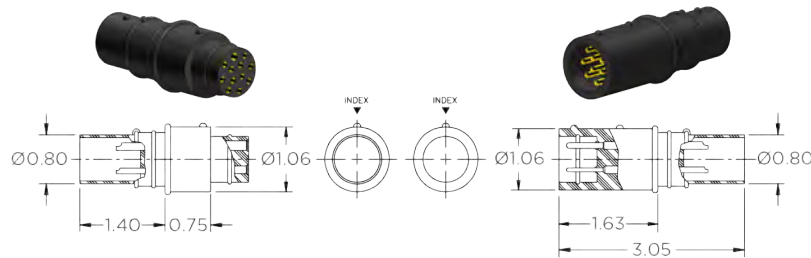

Material: Special Neoprene, Molded
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Voltage Rating: 600 VDC. Contact TE for higher voltage requirements
Mated Pressure Rating: Up to 20,000 psi

Locking Sleeve	Available For	Dummy Connector	Mates To
K-MLS-D	VMK-MP, VMK-MP-WOC	VMK-FSD	VMK-MP
K-FLS-D	VMK-FS, VMK-FS-R/A, VMK-FS-WOC	VMK-MPD	VMK-FS & VMK-FS-R/A

• Specify number of conductors when ordering
Material: Special Neoprene, molded
Mated Pressure Rating:
• VMK-MPD: 20,000 psi
• VMK-FSD-HP: High Pressure, 4,000-20,000 psi, contact required
• VMK-FSD-LP: Low Pressure, ≤ 4,000 psi, no contact required

Note:
• * Must specify cable OD.




VMK-FS & Associated Parts

Mateable Bulkhead Connectors

VMK-BCL


Special Insulating neoprene is permanently molded to the metal shell. These types of connectors are used where physical abuse may be too great for the non-metallic (glass reinforced epoxy) series. The VMK-BCL has a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

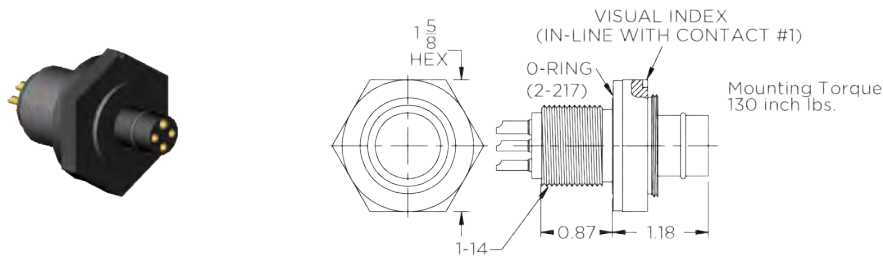


Material: 316 Stainless Steel, Internal Insulation-Special Neoprene
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: VMK-FSD

VSK-BCL

One of our oldest connectors in the non-metallic series, with male pin as shown. Connector is one homogeneously molded unit available with different thread lengths as indicated. The VSK-BCL has a locking sleeve provision and utilizes a facial o-ring seal to the bulkhead.

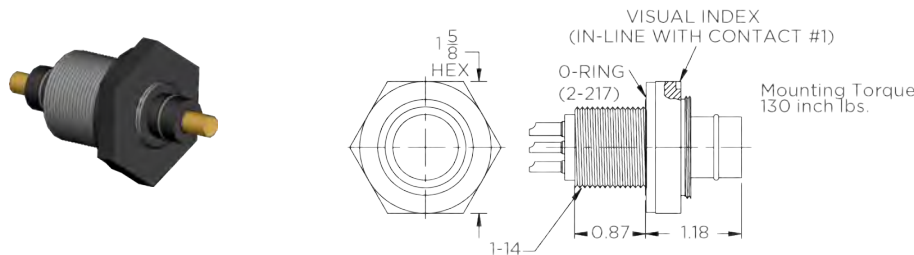

VSK-BCL-LT

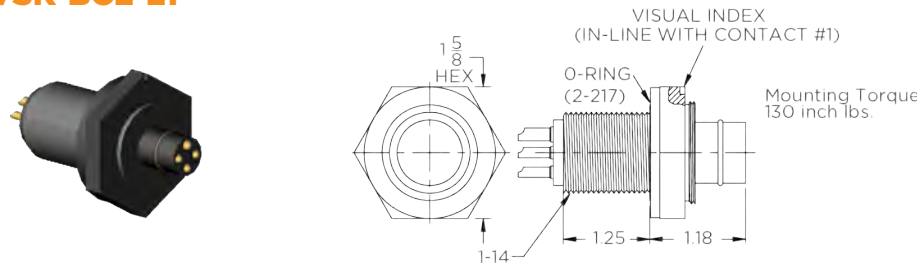

Material: Glass Reinforced Epoxy
Contacts: Copper Alloy, Hard Gold Plated per ASTM-B-488
Mated Pressure Rating: Up to 20,000 psi
Dummy Connector: VMK-FSD

Note:


- Torque values referenced in this literature assume installation into dry metal threads. Please contact TE for recommendations.



Special Assemblies


Cable Molds and Cable Splices

WYE MOLDS

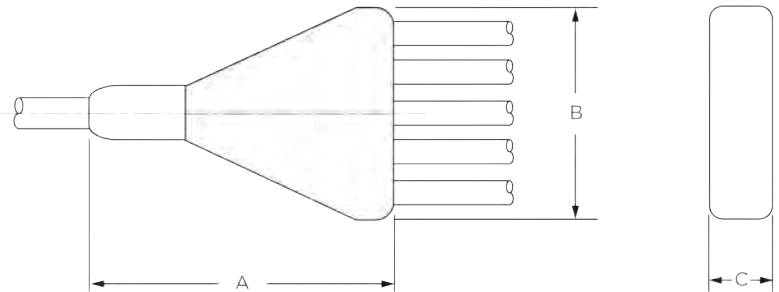

Available Molds	A (in)	B (in)	C (in)
Y-30	2 3/4	1 5/8	5/8
Y-40	4 7/8	3 1/2	1
Y-50	6 3/4	4	1 1/2
Y-70	9 1/2	5 1/2	2

BARREL MOLDS

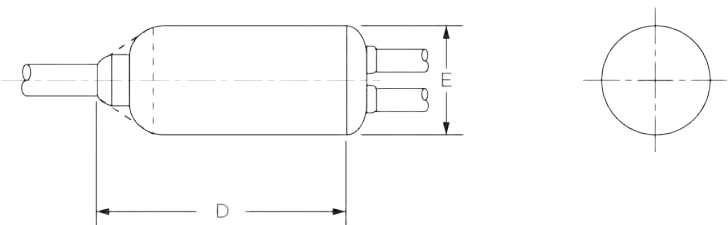

Available Molds	D (in)	E (in)
B-30	2	1 1/4
B-40	4	1 3/4
B-50	6 1/2	2 3/4
B-70	8 1/2	3 1/2

Material: Neoprene Molding per B/A X-5727 or Polyurethane; Black per MIL-M-24041

Note:

- Length and geometric shape may vary depending on cable diameter.

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. Just call your local support number or visit www.te.com/industrial to chat with a Product Information Specialist.

TECHNICAL SUPPORT

te.com/support-center

US Inside Sales:

Phone: +1 619-562-7071

Email: elcajonsales@te.com

Phone: +1 979-865-8846

Email: bellvillesales@te.com

Phone: +1 401-637-4952

Email: eastcoastsales@te.com

UK Inside Sales:

Phone: +44 (0) 1493-652733

Email: gtymouthsales@te.com

France Inside Sales:

Phone: +33 2 43 61 45 45

Email: offshore-ckb@te.com

Brazil Inside Sales:

Phone: +55 21 3592-0920

Email: simone.carvalho@te.com

North America +1 800 522 6752

North America (Toll) +1 717 986 7777

EMEA/South Africa +800 0440 5100

EMEA (Toll) +31 73 624 6999

India (Toll-Free) +800 440 5100

te.com/MOG

AMP, AGASTAT, CII, DEUTSCH, DRI, HARTMAN, KILOVAC, MICRODOT, NANONICS, POLAMCO, Raychem, Rochester, SEACON, TE, TE Connectivity and the TE connectivity (logo) are trademarks owned or licensed by TE Connectivity. Other products, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information herein, nothing herein constitutes any guarantee that such information is error-free, or any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. The TE entity issuing this publication reserves the right to make any adjustments to the information contained herein at any time without notice. All implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose are expressly disclaimed. The dimensions herein are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice.

Consult TE for the latest dimensions and design specifications.

© 2021 TE Connectivity All Rights Reserved.

2359231-1 04/21