

HOW TO USE MODEL 9601-D

TECHNICAL NOTE

February 19, 2007




Copyright © 2007 by NAL Research Corporation


The specifications in this document are subject to change at NAL Research's discretion. NAL Research assumes no responsibility for any claims or damages arising out of the use of this document or from the use of the 9601-D based on this document, including but not limited to claims or damages based on infringement of patents, copyrights or other intellectual property rights. NAL Research makes no warranties, either expressed or implied with respect to the information and specifications contained in this document. Performance characteristics listed in this document are estimates only and do not constitute a warranty or guarantee of product performance.

MODEL 9601-D-N

1. Connect a data terminal equipment (DTE) such as a computer, a data logger, a microcontroller, etc., to the 9601-D-N's DB25 port using the RS232/data cable model HRC-24-9 (not included and can be purchased separately from NAL Research). The data kit HRC-24-8 can also be used; however, the DPL handset must NOT be connected. The HRC-24-9 cable consists of a full DB9 serial connector and two terminal leads for DC power input. The 9601-D-N supports three-wire serial communication (see document TN2007-610-V2.0.0) if flow control is not required. The 9601-D-N's baud rate is factory set at 19.2kbits/sec. The 9601-D-N does not need or require a SIM card to operate.

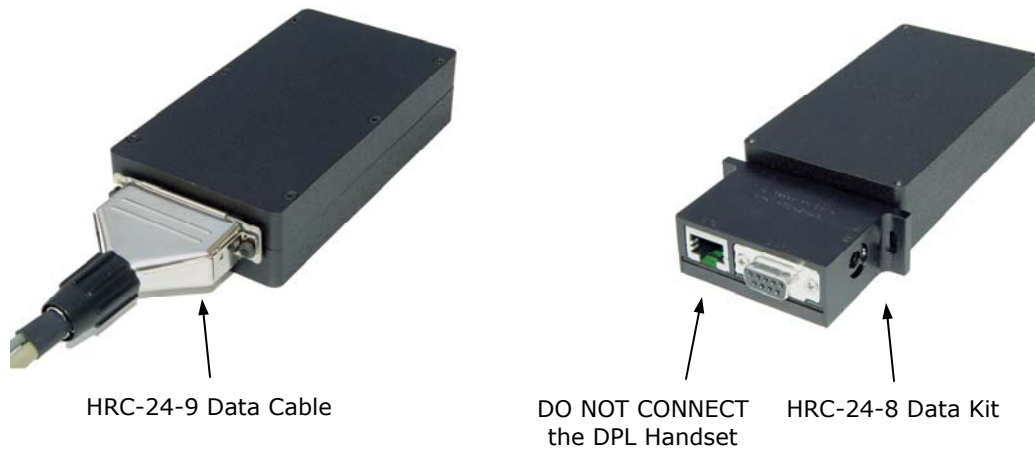

2. Connect an external antenna to the 9601-D-N. Any of the four types of antennas offered by NAL Research is appropriate. Make sure the antenna has full view of the sky and the cable loss between the modem and antenna is less than 3 dB.

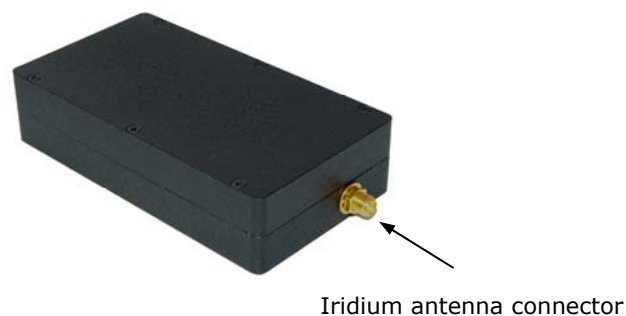

3. Supply DC power of 5.0VDC (ranging from 4.5VDC to 5.5VDC) to the power leads on the HRC-24-9 or on the HRC-24-8 data kit. The 9601-D-N will NOT power-up unless Pin 1 on the DB25 is held at logic high. The input logic high threshold is 2.0V and logic low threshold is 0.5V. If the toggle ON/OFF function is not needed, Pin 1 on the 9601-D-N can be connected directly to EXT_PWR line (or Pin 4 on the DB25). NAL Research's AC adapter model LA-3098 can be used to power the 9601-D-N (see pictures below).




4. Use any terminal emulator software (such as Windows® HyperTerminal) and AT commands to communicate with the 9601-D-N. The 9601-D-N is also shipped with a CD labeled "Manuals/Software for Model 9601-D." There is a terminal emulator software package on the CD called SatTerm. NAL Research recommends the use of SatTerm with the 9601-D-N since it provides a complete reference manual for all AT commands through user selected buttons for quick and easy access.
5. Check the followings if an SBD sessions cannot be established:
 - a. Antenna has a full view of the sky
 - b. Power source provides adequate current

MODEL 9601-D-I

1. Connect a data terminal equipment (DTE) such as a computer, a data logger, a microcontroller, etc., to the 9601-D-I's 26-pin Samtec connector. Users have to fabricate their own interface cables using the Samtec TCSD series shown in picture below to include both serial data lines and DC power input lines. The 9601-D-I will NOT power-up unless Pin 7 on the 26-pin connector is held at logic high. The input logic high threshold is 2.0V and logic low threshold is 0.5V. If the toggle ON/OFF function is not needed, Pin 7 on the 9601-D-I can be connected directly to EXT_PWR line (or Pin 1). NAL Research's AC adapter model LA-3098 can be used to power the 9601-D-I.



2. Connect an external antenna to the 9601-D-I. Any of the four types of antennas offered by NAL Research is appropriate. Make sure the antenna has full view of the sky and the cable loss between the modem and antenna is less than 3 dB.

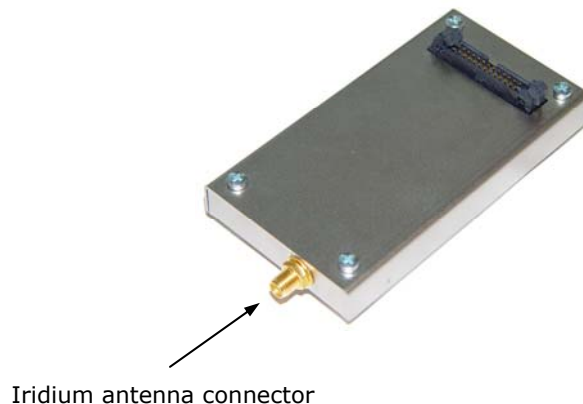

3. Follow steps 4 and 5 in the previous section.

IMPORTANT: EMSS-enabled 9601-D must first be provisioned (signed up for airtime) with EMSS SBD Service before testing or field use. Accessing the DoD EMSS Gateway is not authorized until the 9601-D is provisioned. Unauthorized attempts to access the DoD EMSS Gateway will result in immediate disabling of the offending device, which must then be returned to NAL Research for repair. See <https://sbd.pac.disa.mil> for more information regarding EMSS service provisioning.

TECHNICAL SUPPORT INFORMATION

For technical support, please contact us at:

Phone: 703-392-1136 x200 or

E-mail: contact@nalresearch.com

Technical documents are also available to download on NAL Research's website
www.nalresearch.com under <http://www.nalresearch.com/AnonymousFTPSite.html>