


- NOTE - ASSEMBLY STEPS:
1. RAW MATERIAL PROVIDED TO TELEDYNE DGO IS 70" CF CABLE ASSEMBLY PRE-TERMINATED WITH SMA CONNECTOR.
 2. ASSEMBLIES ARE CUT IN HALF AND DG0 110 PLUGS INSTALLED AND MOLDED TO CREATE FINISHED LENGTH.
 3. TERMINATED CABLE VSWR TO TEST < 1.25:1 DC - 3GHZ.

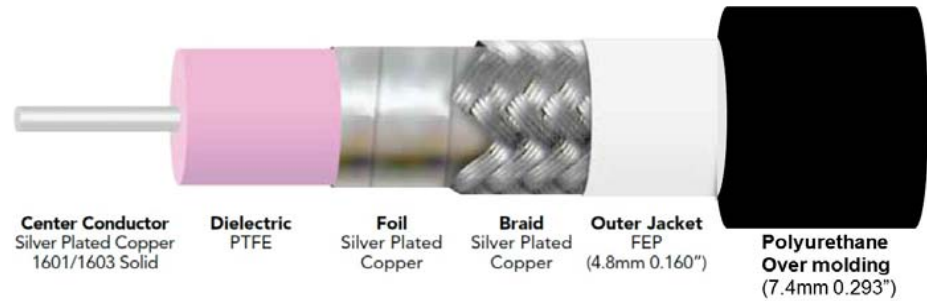

CUSTOMER FURNISHED CABLE DRAWING
CABLE IS INSULATED WIRE INC. PN 1601 COAX OVERMOLDED WITH BLACK POLYURETHANE

SEE DRAWING 100221160-05 FOR RAW ANTENNA CABLE FABRICATION.

REVISION HISTORY:
A - 20SEP17 - LRAUV5 ORGINAL RELEASE.
B - 11DEC17 - DETAILED FABRICATION STEPS AND CHANGED CONNECTOR BRAND. MRC.

(c) MBARI 2017 MBARI provides the documentation and materials "as is", with no warranty, express or implied, as to title, non-infringement of third party rights, merchantability, or fitness for any particular purpose, or the performance or results which you may obtain from their use. You assume the entire risk associated with use.

CABLE PART NUMBER 100221160-05.1

MONTEREY BAY AQUARIUM RESEARCH INSTITUTE
7700 SANDHOLDT ROAD
MOSS LANDING, CA 95039



PHONE (831) 775-1700 www.mbari.org
COPYRIGHT © 2018 MBARI
MAY NOT BE COPIED WITHOUT PERMISSION

Title LRAUV ANTENNA WET COAX CABLE ASSEMBLY			
Size c	Engineer: Mark Chaffey EMAIL: chma@mbari.org	Number 100221160-05.1-B	Rev B
Date: Tuesday, September 10, 2024	Filename	Sheet 1	of 1