


Do the Math

Using physics and estimation to assess energy, growth, options—by Tom Murphy

Spectral Extravaganza: The Ultimate Light

Posted on [2012-05-15](#)

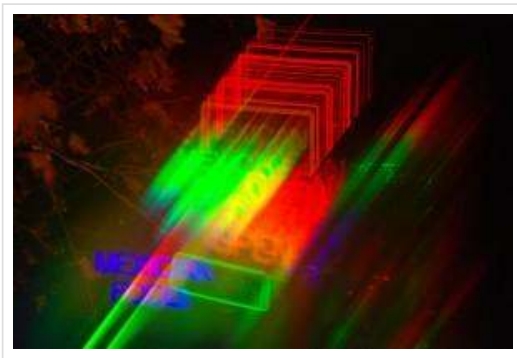

What do you get when you cross an astronomically-inclined physicist with concerns over energy efficiency in lighting? Spectra. Lots and lots of spectra. In this post, we'll become familiar with spectral characterization of light, see example spectra of a number of household light sources, and I'll even throw in some mind-blowing photos. In the process, we'll evaluate just how efficient lighting could *possibly* be, along the way understanding something about the physiology of light perception and the definition of the increasingly ubiquitous lighting measure called the **lumen**. Buckle your physics seat-belt and prepare to think like a photon.

Spectral Introduction



- Figure 1: Abundance of sources, spectrally residing in the sky. The Hollywood sign is backlit by standard fluorescent tubes. A variety of other source types are discernible as well.

What do I mean by spectra? Light is characterized by *wavelength*, running from 400 nanometers (nm, or billionths of a meter) at the blue/violet end to 700 nm at the red end. Some familiar sources emit light at a single, pure wavelength—called **monochromatic**—like red helium-neon lasers at 633 nm, doubled-YAG (green) lasers at 532 nm, and those very orange low-pressure sodium streetlights at 589 nm (Figure 3). But most natural light sources (or colors) are composed of *continuous* distributions of light at all visible wavelengths. White light has a healthy helping of all colors, as can be seen in a rainbow, spanning red to violet.

Meanwhile, many synthetic lights (fluorescents; gas discharge tubes such as neon; mercury vapor and sodium vapor lights; etc.) emit a line spectrum—an amalgam of discrete wavelengths associated with atomic and/or molecular energy transitions, possibly with a bit of phosphor thrown in to give some modicum of continuum light.




- Figure 2: A pair of "neon" signs broken up into spectral components, top-center. The strong line/continuum spectrum at upper left is from a light out of the field of view.



- Figure 3: A low-pressure sodium vapor lamp over a tree is almost perfectly monochromatic, as seen by the single, sharp spectral image at upper right. A much weaker green line is also barely visible. Two other LPS sources in the lower-left of the picture are seen in their monochromatic spectral form near the upper-right.

Colored LEDs (light-emitting diodes, e.g., red, orange, green, blue; Figure 4) are in between the continuum and line sources, emitting light over a continuous—though not very broad—part of the spectrum. Maybe “fat line sources” would be a reasonable characterization.

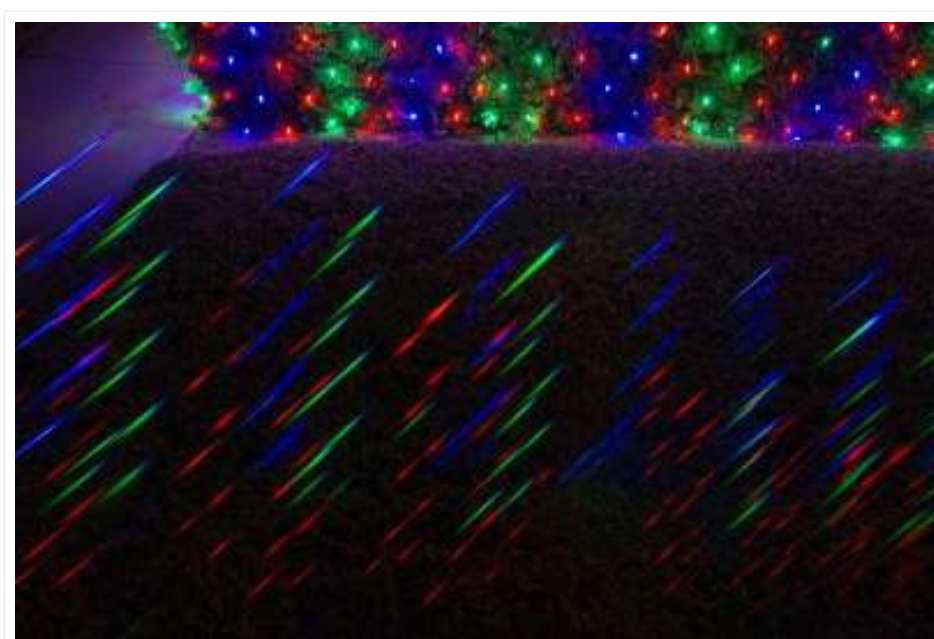


- Figure 4: Colored LEDs each result in short spectra, almost pure in color. The green LEDs do extend a bit into the blue.

The photos above from around my neighborhood illustrate various forms of spectra in a rich, but sometimes bafflingly complex, way—obtained by placing a transmissive diffraction grating film in front of the lens. The combined-light (un-dispersed) scene is visible in each, but stretching off at an (arbitrarily-set) angle is the “dispersed” version of the same. Line sources produce replications of their shape at each emission wavelength, while continuous sources smear out. The distance from the un-dispersed source to its spectral replica is proportional to the wavelength of light (deep blue/violet is closer, at 400 nm, than deep red, at 700 nm). But the camera helpfully color codes these as well. Note that the low

pressure sodium lights are essentially monochromatic—so make a single, sharp, replica at 589 nm. Gas-discharge tubes (as seen in Figures 1 & 2 and intro figure) have a forest of lines. Meanwhile, the colored decorative LED lights produce short, stubby spectra in their “fat monochromatic” way (Figure 4).


Color Perception

Our eyes are essentially tri-color devices. If you look at a sharp spectrum of white light (a rainbow is too mushy, with overlapping colors), you mainly see red, green, and a blue-violet: not much yellow or cyan between the colors. It is only in *combination* that we create mixture colors. This is why an RGB monitor can synthesize almost any color by varying the brightness of red, green, and blue pixels. Figure 5 shows a representation of the visual spectrum that is not far from our perception, showing the sensitivity curves of the three color receptors in the eye. When we perceive $L > M$, we call it red, and if we sense $L < M$, we call it green—until S starts to perk up. I am guessing the S, M, and L labels mean short, medium, and long wavelength.

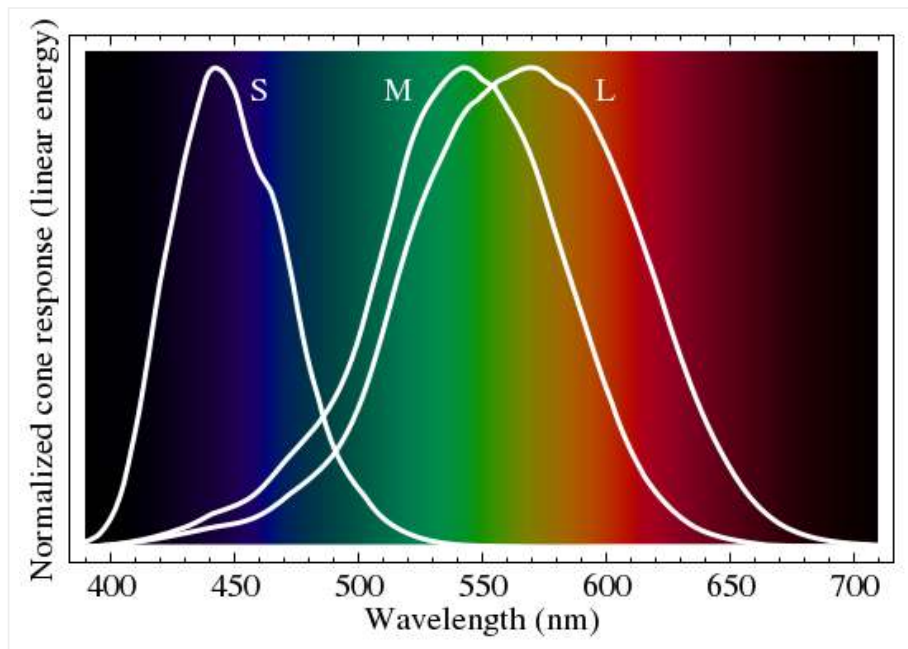


— Figure 5: Tri-chromatic sensitivities imposed on visible spectrum.

As an aside, if I generate a sharp, continuous solar spectrum for my camera, I see a similar tri-color behavior—albeit much more faithfully red-green-blue (Figure 6). These relate to the filters used in front of the pixels to sort out light by color. Note the absence of very much yellow or cyan in the transitions from red to green and green to blue, respectively.

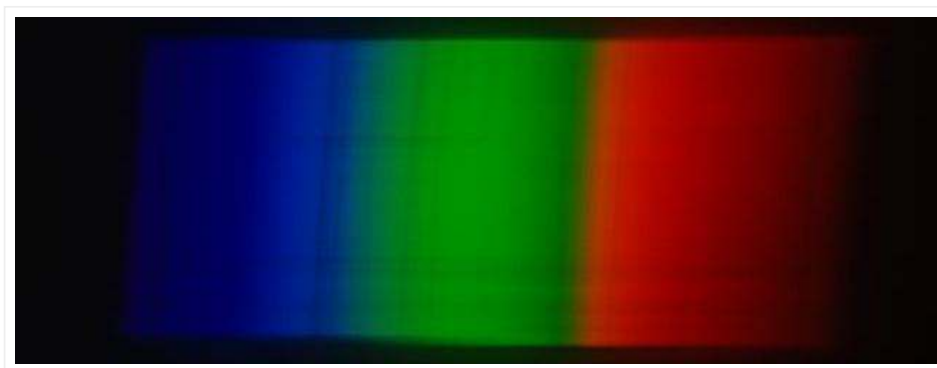

— Figure 6: Solar spectrum (through slit) captured with the same camera and grating as the other photographs. Not much yellow or cyan to be seen, reflecting sharp filter cutoffs. Absorption lines (Fraunhofer lines) are visible in the spectrum, arising from constituents in the solar atmosphere.

In aggregate, our visual sensitivity peaks in the green, at 555 nm, falling off on either side in something called the **photopic** function (there is also a *scotopic* function for night vision—rods rather than cones—shifted a bit toward the blue). Figure 7 shows the photopic sensitivity function (blue), with a solar-temperature blackbody curve (black) and an incandescent filament blackbody curve (red) also shown for reference.

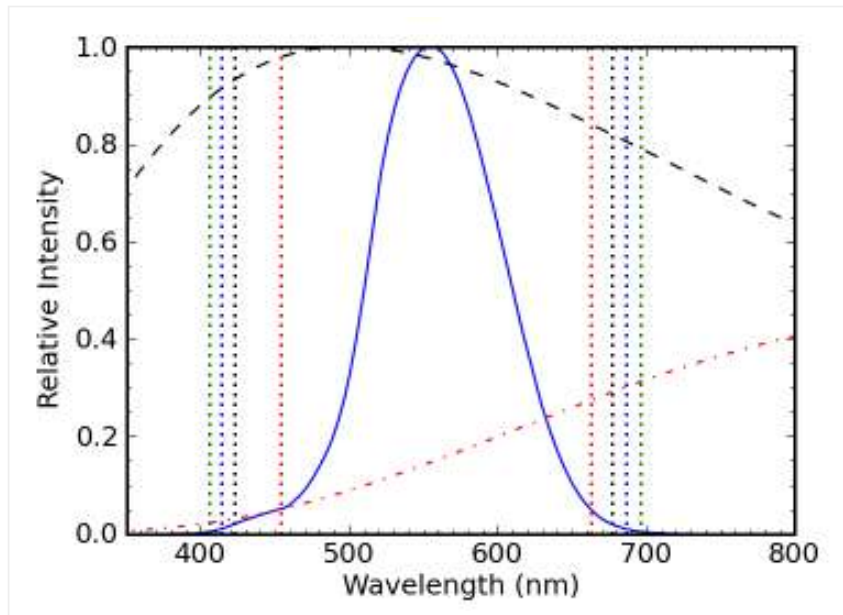

— Figure 7: The photopic sensitivity curve (blue) compared to the solar blackbody spectrum (black) and a blackbody at a temperature characteristic of incandescent bulbs (red).

I will be referring to **blackbody** spectral distributions, also called Planck functions, after Max Planck. Don't take the word "black" literally here: think of it as "dull," as in not shiny like metal. Any "dull" object emits thermal radiation (shiny ones do too, but at suppressed strength). As the temperature climbs, the radiation shifts from the infrared into visible wavelengths, so that a poker may get red-hot; coals get orange-hot, and the Sun is white-hot. These are all blackbodies, and we generally strive to emulate them in our artificial lighting sources. Incandescent bulbs cleverly manage to do this by *actually being* hot, radiating blackbodies. Their only problem is that most of the light is generated outside of the visible domain. More on this later.

The Lumen

The **lumen** is a unit that captures how bright a source appears to the human eye. A laser pointer putting out 5 mW of light at 532 nm (green) will emit 3 lumens (lm) of light, while a red laser pointer at 633 nm emitting the *same amount of power* is only seen to be 0.8 lm. Meanwhile, an infrared laser of any (modest) power output will register *zero* lumens, since the eye cannot perceive its brightness.

Every photon of light carries a discrete amount of energy, in Joules: $E = hc/\lambda$, where $h = 6.626 \times 10^{-34}$ J·s is Planck's constant, $c \approx 3 \times 10^8$ m/s is the speed of light, and λ is the wavelength of the photon, expressed in meters (green light is about 5.5×10^{-7} meters, or 550 nm). So a stream of photons emerging from a light can be associated with a **power**, measured in Watts, since we can specify how many photons per second are emitted, each carrying known energy. Energy per time is power, and Joules per second is also called Watts.

The lumen is defined so that at the peak of the photopic sensitivity curve (555 nm), one Watt of photon power will carry a brightness of 683 lumens. We can then describe the **luminous efficacy** of a monochromatic 555 nm source as 683 lumens per Watt (lm/W).

If you stand in front of a selection of light bulbs at the store, you should be able to find the brightness in lumens listed somewhere on the box. You'll also usually find the *actual* power consumed by the light bulb. In the case of fluorescent or LED lights, this is not the "replacement wattage" in incandescent terms, but the actual electrical power consumed when


the device is on. Dividing these numbers, you'll find that incandescent lights have luminous efficacies around 15 lm/W. Fluorescent and LED lights tend to be closer to 60–80 lm/W. Much better, but far short of our 683 lm/W monochromatic green source.

Luminous Efficacy of Incandescents

You can figure out the luminous efficacy of any monochromatic (laser) source by gauging how high the photopic curve is at that wavelength relative to the peak, and multiplying this fraction by 683. But what about a *distribution*? In this case, an *integral* (piecewise sum of wavelength slices) of the photopic curve times the source spectrum in question does the job.

Incandescent lights are essentially blackbody radiators (glowing white-hot), whose spectra are described by the Planck function. Two examples are shown in the plot above, corresponding to the 5800 K surface temperature of the Sun and the 2800 K effective temperature of a light bulb filament. Incandescent lights are phenomenally efficient at converting electricity into photons. The problem is that most of those photons are emitted in the infrared portion of the spectrum, beyond human perception. A 5800 K blackbody emits 37% of its light between 400–700 nm, while only 6% of the light from a 2800 K filament comes out in the visible range.

We can ask what the luminous efficacy of a blackbody source of photons would be. It must be less than 683 lm/W, since many of the Watts are expended at wavelengths of low (or no) photopic sensitivity. The plot below (Figure 8) shows the result. The peak occurs at 6640 K and 96 lm/W, whereas the efficacies at 5800 K and 2800 K are 93 lm/W and 15 lm/W, respectively. Obviously, the solar spectrum achieves near-maximal efficacy. It's no coincidence: our eyes are adapted to spectrum of our star.

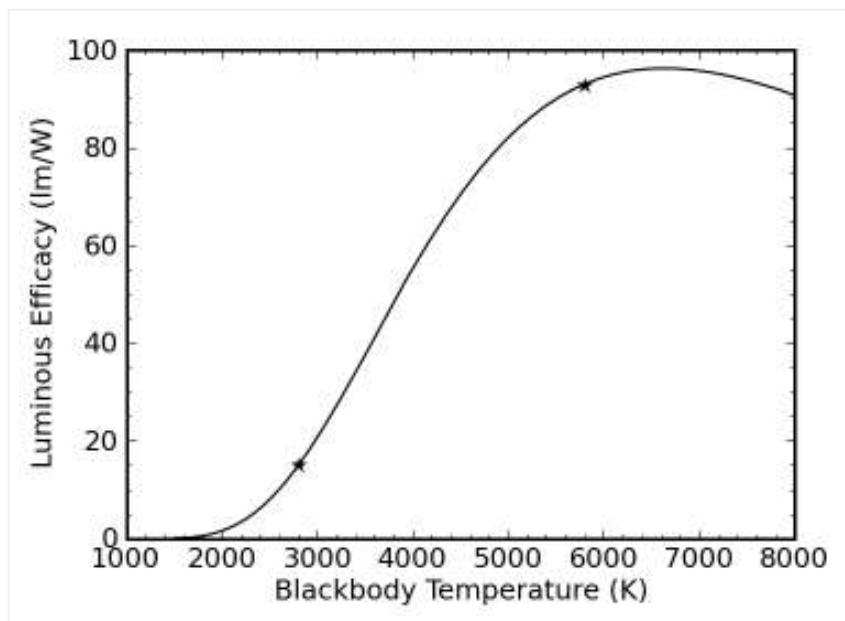

— Figure 8: Luminous efficacy of pure blackbody sources.


So we could make incandescents more efficient by getting them hotter. The problem is that filaments melt if you get them much hotter than they are already. Halogen bulbs surround the filament with gases that redeposit evaporated atoms back onto the filament, letting them operate at slightly higher temperature. But even these are still far down on the curve.

How Good Can it Get?

Okay, so a blackbody source near 6000 K like the Sun gets up to nearly 100 lm/W. But how good would an ideal white light source be if we could engineer its spectrum to be anything we want? A quick-and-dirty answer can be had by using the fact that 37% of the solar spectrum is within visible limits. If we could design a source to mimic the solar spectrum, but emit *not one* photon of light at wavelengths we can't see, we'd get something like $93/0.37 \approx 250$ lm/W.

We can refine this somewhat by recognizing that the eye's sensitivity at the extreme ends of the visible spectrum (400 nm and 700 nm) is not so hot, so we could truncate our blackbody spectrum more aggressively, and get a higher luminous efficacy by wasting fewer photons where we need them less. The four sets of vertical dotted lines in Figure 7 above represent cutoffs at the 0.5%, 1%, 2%, and 5% levels of the photopic sensitivity curve (blue). In other words, if we were willing to limit the spectrum of our light source to wavelengths at which our eyes have at least 5% of the peak sensitivity, we'd be dealing with the range between the red dotted lines, from about 450–660 nm.

How high will the luminous efficacy climb as we narrow the range? Figure 9 tells the story.

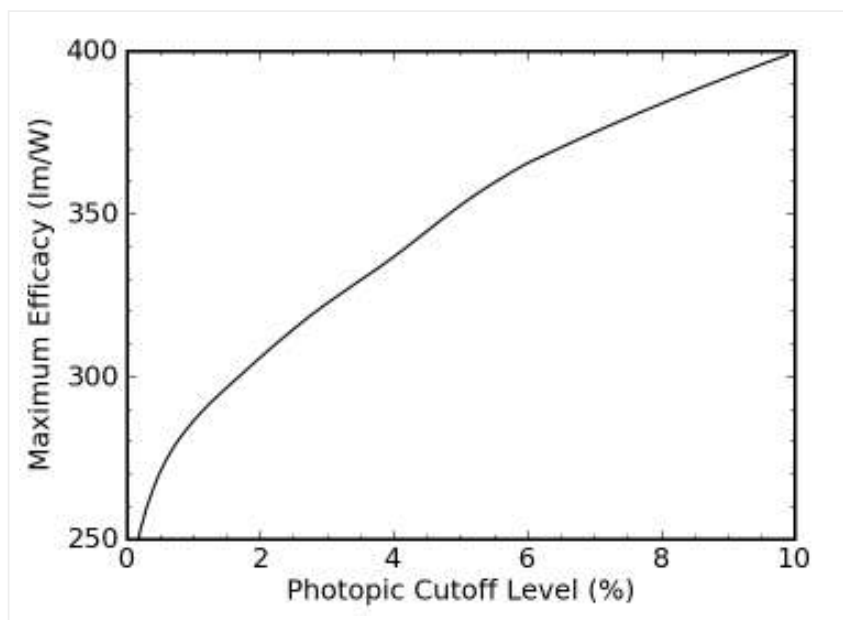

— Figure 9: Luminous efficacy achievable with truncated blackbody, as a function of truncation degree.

The efficacy gets better and better as we decrease the range. Ultimately, as we approach a cutoff at the 100% sensitivity level, we would be looking at monochromatic light at 555 nm, and a luminous efficacy of 683 lm/W. But this light is useless for color rendering: it's just green.

So truncating the spectrum comes at a cost. Color rendering will not be as good when we drop the deep reds and deep violet/blues from the spectrum. If we're going to cut corners for the sake of efficiency, we need to also evaluate the *quality of color rendering* to establish criteria for an acceptable white light source.

Color Rendering Index

There is a heinously twisted procedure by which one can evaluate the color rendering index (CRI) of a light, given its spectrum. I'll spare you the details (and secretly wish I had also been spared), but essentially it boils down to "illuminating" eight specially-selected sample color swatches—not particularly attractive colors, I must say—with the test spectrum, and comparing the proximity in color space (think color wheel) to what would happen if the same source were illuminated by a blackbody (incandescent) at the same effective (color) temperature.


Terms that I will be using:

- **CRI:** Color Rendering Index; ranging from 0–100, with 100 representing perfect blackbody (incandescent) performance.
- **CCT:** Correlated Color Temperature; the blackbody temperature that results from illuminating a white source. Really, it's the temperature of the closest blackbody point (called the Planckian locus) in color space. The sun has a CCT of 5800 K, while a typical incandescent bulb is around 2800 K—appearing redder. Higher CCT values look blue, like the light from the stars Sirius or Rigel. This ordering runs counter to intuitive labeling of redder light as

“warm” (like fire) and bluer light as “cold” (like ice).

- **Planckian Offset:** related to CCT, the distance in color space to the nearest blackbody point (on the Planckian locus). Beyond a value of 0.0054, the source is considered to be too far from a blackbody to be considered “white,” and the computed CRI begins to lose meaning.


So if we explore the very best we can do in a truncated solar-type spectrum (CCT = 5800 K)—this time allowing red and blue cutoffs to be at differing photopic sensitivity cutoffs—we arrive at the following plot (Figure 10):

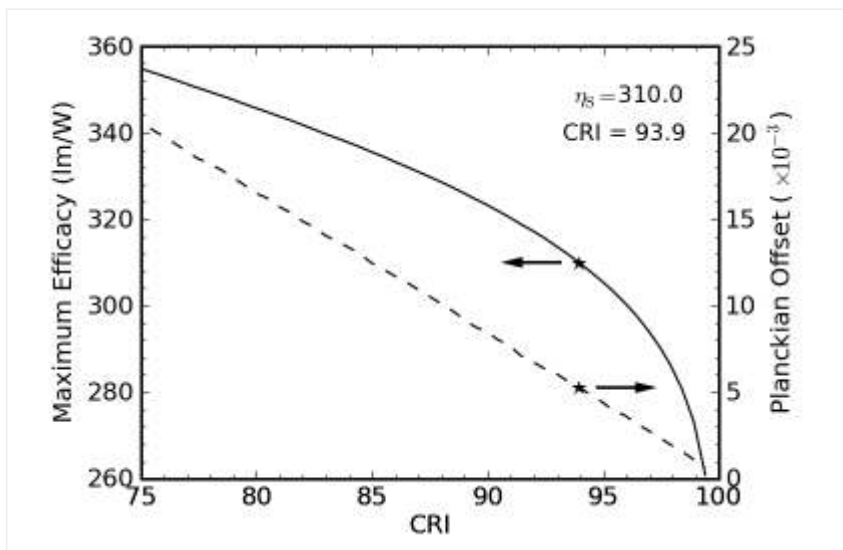

— Figure 10: Maximum performance of a truncated 5800 K blackbody as a function of allowable color rendering performance.

How do we interpret this? Following the solid curve, at the right hand side, we can get a near-perfect CRI around 100 while achieving 260 lm/W. As we increase the level of spectral truncation, the luminous efficacy shoots up (not wasting photons on zones of weak sensitivity), but the CRI declines. Now looking at the dashed line, we find that we exceed the tolerable “white” limit (Planckian offset) of 5.4×10^{-3} at a CRI of 94 and a luminous efficacy of 310 lm/W. It turns out that this limit corresponds to a wavelength range of 423–659 nm. Thus 310 lm/W is the maximum luminous efficacy for a light we would still regard as “white” at the color temperature of the Sun.

At 2800 K, corresponding to the “warm” illumination to which we are accustomed, we actually do better (Figure 11).

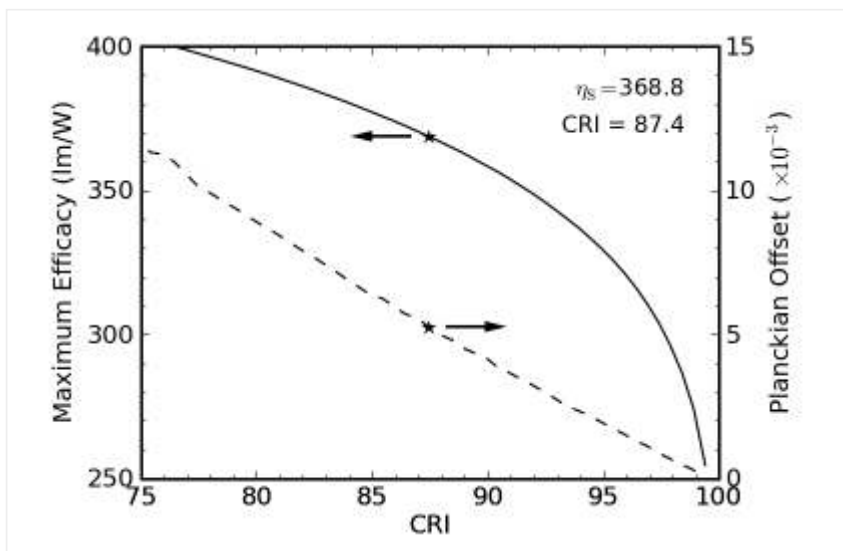


— Figure 11: Maximum performance of a truncated 2800 K blackbody as a function of allowable color rendering performance.

Now, we slide all the way up to about 370 lm/W before busting the Planckian offset threshold, resulting in a CRI of 87 (a little shy of 90, but probably acceptable to most). The wavelength range in this case is 422–648 nm. The red-heavy 2800 K spectrum (see Figure 7) allows a bit more skimping on the red cutoff than was the case for the solar spectrum.

So if we could design a magic light source that emitted a blackbody-like spectrum across a finite wavelength range, generating photons at 100% electrical efficiency (such a source would not even be *warm* to the touch), we could hope to achieve luminous efficacy values in the range of about 300–370 lm/W. This is roughly a factor of five better than present sources, almost all because of electrical efficiency rather than spectral efficiency.


Example Spectra of Alternative Lights

Enough with the theoretical, magical light. What do real lights achieve? Below is a gallery of example spectra I acquired for various lights. Descriptions follow each one.

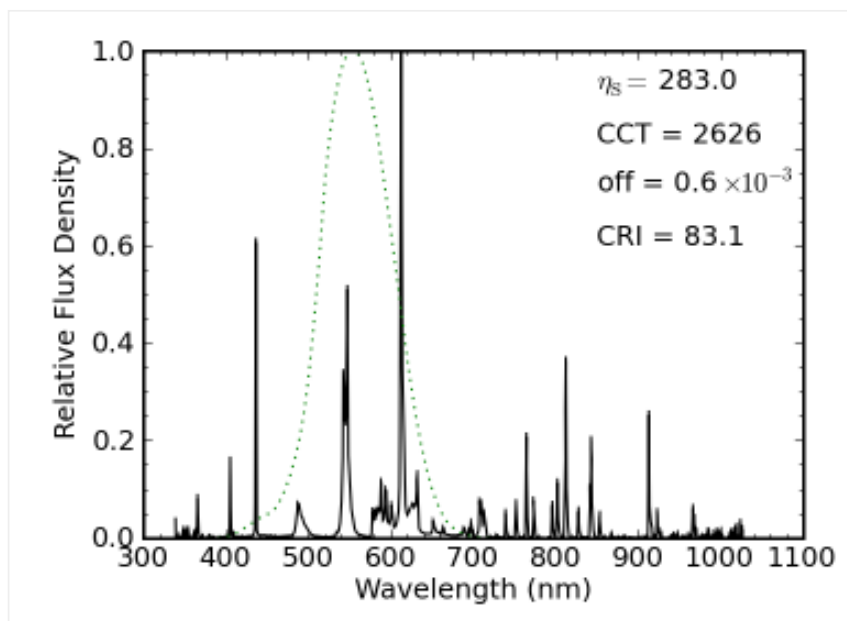

— Figure 12: A compact fluorescent light (CFL) seconds after being turned on. The spectrum is dominated by line sources, with a forest of infrared lines that will later disappear.


Figure 12 shows a 16 W compact fluorescent light (CFL), billed as a “60 W” replacement, rated as producing 900 lumens (so 56 lm/W total). I caught this spectrum just after the light was turned on from a dead-cold state. The spectrum itself has a luminous efficacy of 283 lm/W, at a “warm” color temperature of 2600 K, a Planckian offset well below the 5.4×10^{-3} limit, and a not-so-stellar CRI of 83.

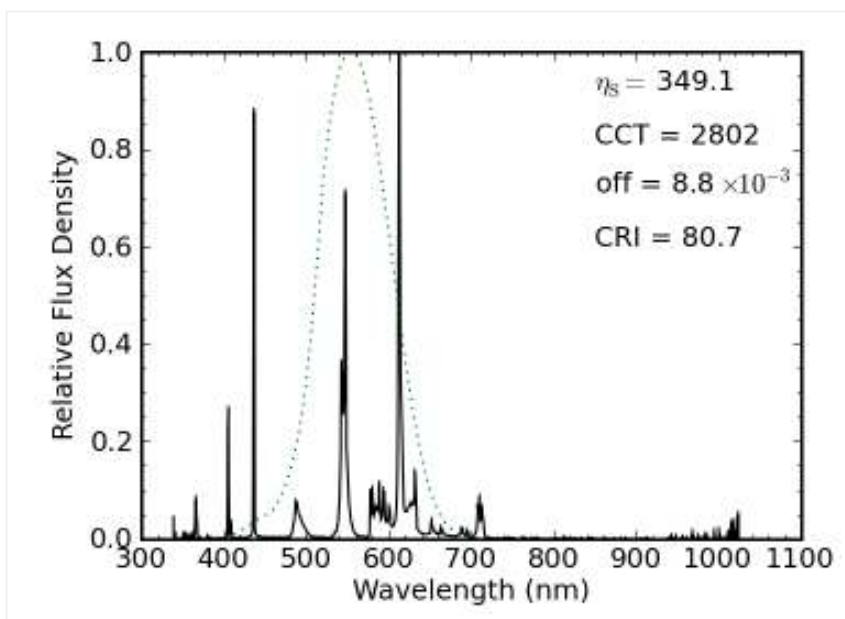

— Figure 13: Same CFL bulb after warming up. Some semi-broad phosphors are used for continuum light, but lines still dominate.


The same bulb after a minute of warm-up has eliminated the forest of infrared lines, and has strengthened its green line relative to the others. The spectral luminous efficacy sails up to 350 lm/W on account of the fact that it no longer produces the infrared lines. But the source busts the Planckian offset limit, and the CRI sinks farther. The light certainly brightened considerably during the warm-up, even though the power draw (as measured via a kill-A-Watt) was steady at 16 W the whole time.

How do we reconcile the fact that a 900 lm source takes 16 W (56 lm/W) when the spectrum is cruising at 350 lm/W? Electrical efficiency. This CFL is turning only about 16% of its electrical energy into non-thermal photons. The photons it **does** produce are cleverly confined to the visible region (after warm-up), so its spectrum is about as efficient as one might like—even if the color rendering isn't so hot—but the electrical-to-photon piece is the bottleneck.

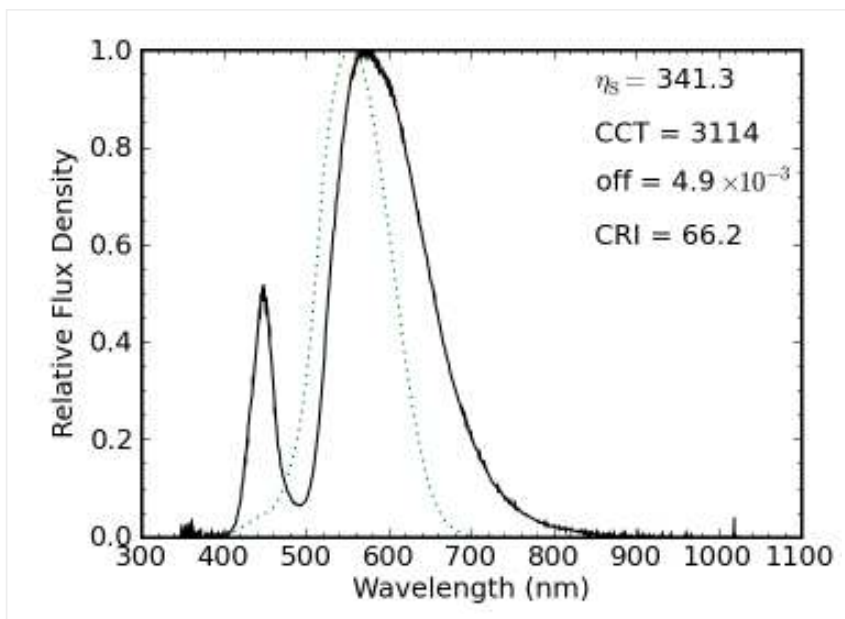


— Figure 14: A "warm" LED light spectrum. One blue LED pumps a broad-band yellow phosphor.

Figure 14 shows the spectrum of an LED light rated at 86 lm and sipping 1.5 W (about 60 lm/W). It's color temperature is around 3000 K, and therefore "warm." It's really just a blue LED (narrow feature at left) pumping a broad yellow phosphor. The spectral luminous efficacy is quite high, at 340 lm/W, and its Planckian offset qualifies the source as being white. Its color rendering is pretty poor, however, at 66. Comparing the spectral luminous efficacy to the achieved luminous efficacy reveals a 17% efficiency at converting electrical energy into visible photons.

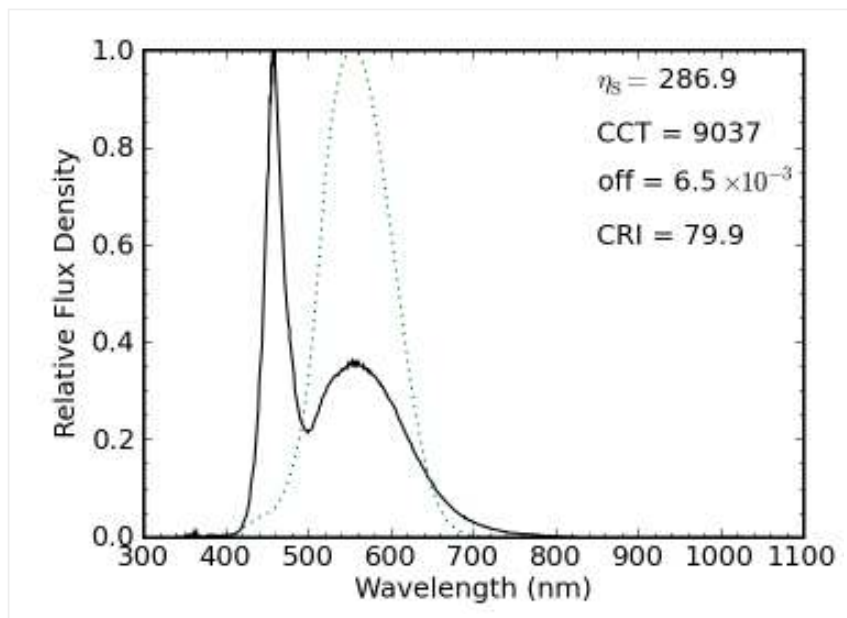


— Figure 15: Similar to the bulb before, this LED light uses a blue LED to pump a broad-band phosphor, but less so.

A similar LED-based light advertised as having a color temperature of 6500 K is shown above, being just outside the "white" threshold, but having a better CRI (80) while turning in a poorer spectral luminous efficacy of 287 lm/W. The color temperature is measured to be much higher ("cooler") than advertised. A similar blue LED is used in this light, but with much less of its light being absorbed and reprocessed by the phosphor. The packaging did not present the output in lumens, so I cannot evaluate the electrical efficiency.

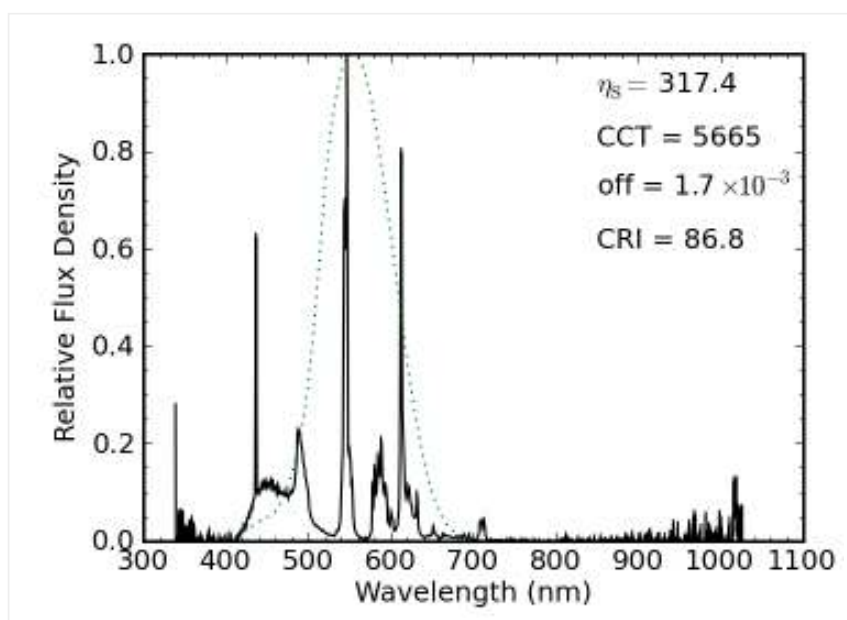

— Figure 16: Laptop screen illuminated by fluorescent light. Still line dominated, although the phosphors are broader than those used in the CFL bulb.


A laptop computer screen back-illuminated with a fluorescent source produces a solar-temperature spectrum that is very near the Planckian locus, and with respectable CRI (87) and a luminous efficacy of 317 lm/W. The main three line sources are the same as for the CFL bulb above, but the laptop screen makes more extensive use of phosphors, filling in the gaps between lines a bit more effectively.

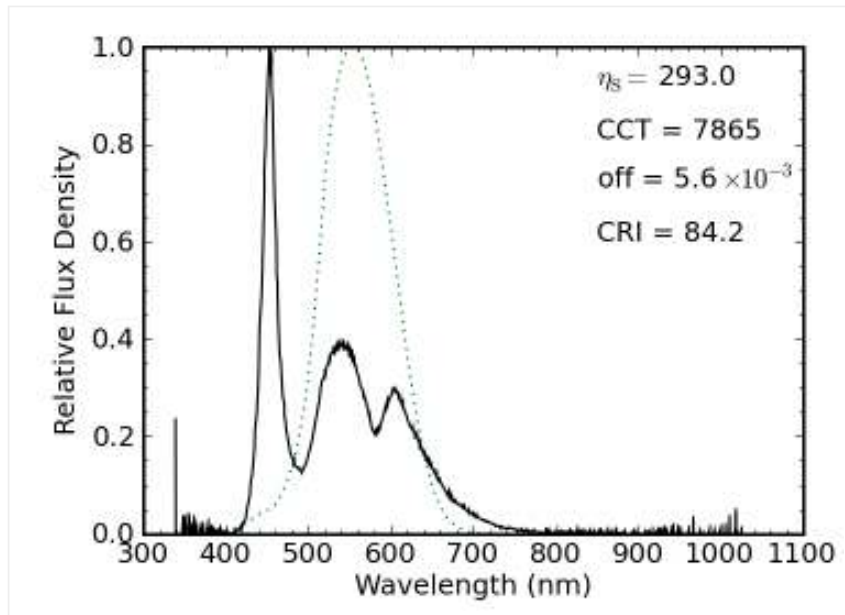

— Figure 17: Laptop screen illuminated by LED lighting. Same concept: blue LED pumps phosphors—in this case a green and a red.

A laptop screen back-lit by LEDs has the familiar blue LED pumping phosphors, but unlike the lights explored above, the laptop LEDs employ an additional phosphor to enhance illumination in the red part of the spectrum. The result is a borderline Planck-like spectrum “cooler” than the solar spectrum, and getting a CRI of 84. The spectral luminous efficacy is 293 lm/W. I also tried an LED-backlit television, with nearly identical results.

Finally, we have a cute device in our physics lecture demonstration facility at UCSD composed of three colored LEDs: one red, one green, and one blue. Three buttons allow any combination to be turned on, the light being thrown into a wedge of lucite (acrylic; plexiglass) with a roughened surface, so the lights diffuse and mix well. Push all three buttons, and you get a reasonable approximation to white. Red plus green (absence of blue) makes the primary subtractive color of yellow. Green plus blue (absence of red) makes cyan. Red plus blue (absence of green) makes magenta (Cyan, Magenta and Yellow—CMY—form the primary **subtractive** colors for dyes and paints). Sweet little toy. Given these three sources, what is the best mix (varying relative brightnesses) that maximizes the color rendering capability of the three in tandem?

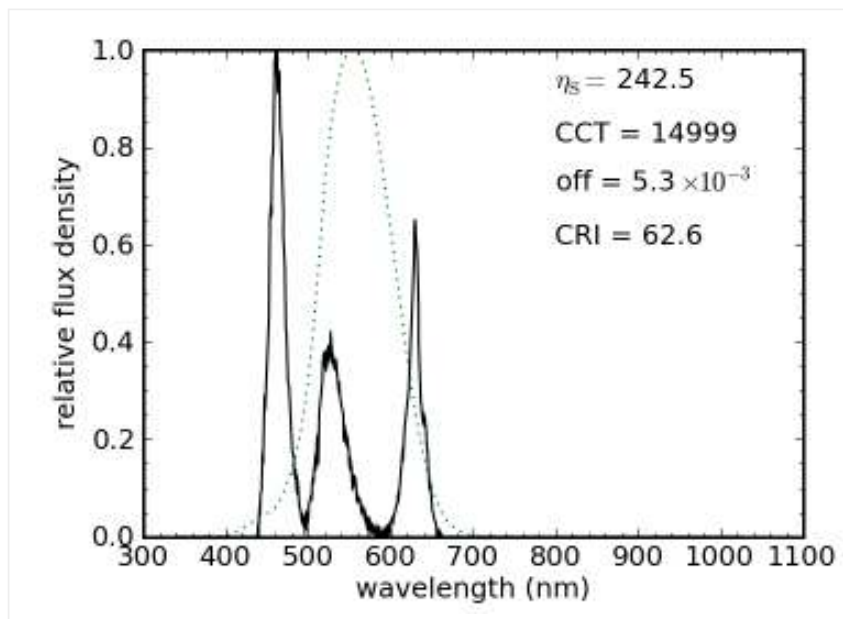

— Figure 19: Three-LED (blue, green, red) mixture giving a white-ish light.

The best I could do is still not terribly good, by lighting standards. If I constrain the source to have an acceptably low Planckian offset, I only get a CRI of 63, and a luminous efficacy of 243 lm/W. If I allow any old offset from “white,” I can get the CRI as high as 77, but the offset is five times the “acceptable” limit (and luminous efficacy hardly budes—up to 246 lm/W). In both cases, the color temperature is absurdly high. The wavelengths of these three LEDs are not at all optimized for this task, so undoubtedly one could do better. Four LEDs (e.g., adding a yellow) would make it even easier.

Lessons

For most readers, this is **way** more than you ever wanted to know about light sources, spectral distributions, and maximum theoretical efficiency. I warned you at the beginning that this might happen when mixing astronomy and energy efficiency.

Besides being a sneaky way to educate folks about spectra, this post highlights that there is an absolute maximum efficiency achievable by lights. Every photon costs some energy. Even if we had a way of generating visible light photons at 100% efficiency, the photons themselves demand payment. Combined with our physiological sensitivity, and our judgment of suitable color rendering, we find that we will never exceed about 350 lm/W for lights that we would deem to be acceptable.

This means that present efficient lighting (spanning 60–100 lm/W) has only about a factor of four to go before reaching theoretical limits. As with many things, practical realities limit us to some fraction of the theoretical maximum. If we improved lighting efficiency at a rate of 2% per year (35 year doubling time), we would max out within the century.

Meanwhile, as we adjust to progress in lighting, we will find ourselves shaking off the old calibration of lighting intensity tied to Watts. The **lumen** is the *right* way to measure perceived brightness. If you keep in mind that standard incandescents are about 15 lm/W, then you can make the calibration yourself. A 1500 lm bulb is at the bright end. A reasonable general-purpose light might be around 600 lm. Flashlights can register in the tens of lumens. A recent excursion to look for LED headlamps demonstrated to me that the lumen is taking off as the primary figure of merit, with numbers typically ranging from 20 lm to 75 lm. I hope to see something like the CRI—and maybe even something akin to the Planckian offset—begin to play a role on the packaging as well, as consumers look for lights that have a natural feel. But who am I kidding? Silly rabbit: the only number people tend to care about is on the price tag.

ASIDE: THE STORY OF WHY

It's perhaps worth a paragraph to explain why I went to all this trouble to evaluate the maximum theoretical efficiency of white light. It started with curiosity, which—as so often happens—quickly turned into a visit to Wikipedia. A nice table on

the [Luminous Efficacy](#) page lacked the entry I wanted. So I computed a value for a perfect, truncated blackbody and stuck it in the table. A year or two later, I read a report that quoted a similar maximum, to my delight. I sought the source and found out that it was...me—or Wikipedia, in any case. Looking back at the page, I saw a “citation needed” note. I was surprised to discover that I could not find a published work detailing this maximum. Seeing this hole in the literature, I decided to plug it. A paper conveying much of the content found here was recently [published](#) in the *Journal of Applied Physics* ([official link](#), © AIP). I thought I'd share the juicy parts with those of you having the stomach for this sort of thing. At the very least, it's a nice collection of spectra of actual household light sources. And even if those bring you no joy, maybe the pictures will?

This entry was posted in [Efficiency](#), [Energy](#) and tagged [data](#), [lighting](#) by [tmurphy](#). Bookmark the [permalink](#) [<https://dothemath.ucsd.edu/2012/05/spectral-extravaganza-the-ultimate-light/>] .

22 THOUGHTS ON “SPECTRAL EXTRAVAGANZA: THE ULTIMATE LIGHT”

Max
on [2012-05-15 at 08:45](#) said:

Thank you for this. The LED light marketing teams need to find a way to convey this information to people. Since CFLs will probably continue to be subsidized to an insane degree, the only way for LEDs to compete is through quality arguments.

Cid
on [2012-05-15 at 09:12](#) said:

Excelent Post. I love your blog, it's very well explained and gets you there bit by bit. At the end of the post, I realize that I've learned a lot!

This type of considerations are very well known in the indoor vegetable growing movement.

I would love to see compared a HPS lamp in there too, it has a very bad CRI but an amazing 200lm/W. And that's why are used as street lights, you just want to see what's there, no need for adequate colour rendering.

(Sorry about my english)

[Robert Bernal](#)
on [2012-05-15 at 12:12](#) said:

I assume that the Cree XM-L is the most efficient light source for a less compromised CRI. Note that higher current lowers efficiency in the specs.

<http://www.cree.com/~media/Files/Cree/LED%20Components%20and%20Modules/XLamp/Data%20and%20Binning/XLampXML.p>

I especially like the fact that it is theoretically possible to convert most all lighting needs over to just 4v solar panels, to charge 3.2v LiFePO4 batteries to power these types of leds up to about 2A giving between 406 to 702 lumens from 90 CRI to “cold 8,300K white” respectively. The cool white versions already get 160 lm/w, soon, they should surpass the 200lm/w range!

At the risk of appearing as a Cree salesman, I just want to share...

<http://www.cree.com/news-and-events/cree-news/press-releases/2011/may/110509-231-lumen-per-watt>

Needless to say, I like to experiment with these things.

dr2chaseon **2012-05-15 at 18:36** said:

Note that you'll still need some sort of regulation between battery and LED; the I-V curve for diodes is very steep after the "knee" (the "forward voltage" of the diode) and the knee moves to lower voltages the warmer the diode gets. If you use a trickle current into a good-sized capacitor powering an LED, it will flash — the voltage rises till you hit the cold V_f of the diode, then it will conduct, get warmer, and continue to conduct until the voltage falls to low, then go out.

Robert Bernalon **2012-05-15 at 21:30** said:

Yep, I forgot about the driver. The AMC drivers (from deal extreme) seems to drop only about .2v. Thus, only up to about 1A...
For smaller current, I just used resistors, and made sure it was dim enough to make up for that steep current to voltage curve (which must be dealt with when using batteries).
However, never thought about the capacitor!

dr2chaseon **2012-05-16 at 20:35** said:

I know about the temperature-dependent flicker only because I used a power LED as part of an over-voltage shunt on a bicycle lighting system, and when it was cold out, it would flash in an intolerable fashion. Yes, I know, how odd to read of "too much power" on this blog, but current sources (alternators) are like that — take what is offered, else the voltage will zoom into the sky.

JohnB

on **2012-05-15 at 12:41** said:

Good post; found the introductory technical aspects of lighting and efficiencies informative/interesting.

Fair play plugging that research hole, pretty cool to see a useful research contribution like that, come solely out of individual curiosity 😊 (it's that kind of enthusiasm/curiosity for a subject which is nice to read about vicariously, as it tends to rub off somewhat)

dr2chaseon **2012-05-15 at 13:25** said:

My efforts, with a Klutz Book / Exploratorium diffraction grating, and some test camera shots under different LEDs:

<http://dr2chase.wordpress.com/2008/05/08/spectrum-led-vs-fluorescent/>

<http://dr2chase.wordpress.com/2011/02/26/led-color-rendering/>

And construction of the LED lighting used in the second link, including photos of bare LEDs clearly showing color bias:

<http://dr2chase.wordpress.com/2011/02/20/undercabinet-lights-basement-kitchen/>

David F Collins

on **2012-05-15 at 14:34** said:

Absolutely delightful! My father was a painter with an acute sense for color sensitivity, to the extent that he studied these matters (he claimed he was mathematically incompetent, but...), albeit I remember hearing them in slightly different terms. To him, color was simply another communication medium. Efficiency was irrelevant: he had a huge north window in his studio, and he never worked at night. Otherwise (like for reading at night) he was not too picky about lighting. Quite frugal, he would have willingly sacrificed CRI for the sake of a reduced electric bill.

The way our eye-brain team presents color to our awareness is quite surprising. One evening my brother and I came home from skiing, arriving in in the gloaming (well, we had started for home at sundown) and noticed that the normally white walls in the living room appeared deep yellow, a tad orange. Once we were inside, the snow that had appeared so white while a few moments before was now blue.

Our wonderment won us a reprieve from a deserved browning-off (note change in emotion-evoking use of color) from our parents for being home late; it was a fascinating dinner-table conversation! Even if it was almost seventy years ago.

Carlos

on **2012-05-16 at 02:10** said:

A question: what kind of lighting was used for the manned spacecrafts such as Apollo or Space Shuttle?

Ben Goren

on **2012-05-16 at 07:34** said:

Tom, what kind of instrument / software did you use for the spectral power distribution charts?

I ask because the i1 Pro spectrophotometer (very popular in the graphic arts industry) can do that sort of thing. When measuring ambient light using the Argyll CMS software suite (and, for all I know, other tools as well), you get the light levels in lux...and I understand that lux can be converted to lumens readily enough.

I'll also mention that your article is an excellent introduction to household lighting, but that you enter a whole new ballgame when you start to consider light for art galleries or photographic purposes. The SoLux halogen lights are the gold standard for the former, and flash for the latter. Flash isn't just desirable for the significant quantity of light it provides or its movement-stopping short duration, but also (in the good units) its spectral power distribution.

Cheers,

b&

dr2chase

on **2012-05-16 at 20:41** said:

I meant to include this link above, or would have if I had been thinking. One of the the things that got me interested in this was a guy at MIT using LEDs for art illumination:

<http://web.mit.edu/neltnerb/www/artwork/purpose.html>

What I could not find were the designer's remarks on the first thing MIT students would do upon being told the purpose of the (eye-) protective diffuser over the UV LEDs; they would try to peer underneath it.

Barney Wolff

on **2012-05-18 at 20:48** said:

Oh dear, this takes me back to the 1960s when I looked into a laser in an MIT lab that was apparently off. Oops, it was an infrared laser. My instructor knocked me out of the way, so I suffered only minimal retina damage. I've done dumber things, but that one is definitely on the podium.

Dan Schroeder

on **2012-05-16 at 08:49** said:

Excellent and much-needed article, which will serve as a reference for years to come. Thanks!

Jim B PEI

on **2012-05-16 at 09:39** said:

This is an excellent and satisfying post as usual! Somewhat math challenged, I must take some of this 'on trust' and understand by seeing the result. I have been using all type of lighting; incandescent, halogen, xenon, fluorescent, CFL, and now LED bulbs. I'm likely going to go to LED and some CFL, in my goal to get my house down under the 5 kw/h/day limit.

One thing not discussed is induction lighting. Mostly, they are larger than 'house' size and more suited to streetlights, outdoor, and industrial, but a comparison of them and how they fit into the 'spectrum' of lighting alternatives in both senses would be interesting.

ajcaland

on **2012-05-17 at 19:53** said:

In Dr. Haitz's paper he suggests a max efficiency higher than yours of 400 lm/watt [pg. 29 col. 2]. He predicts that scaling won't be worth it after 200 lm/watt while the other author suggests 250-300 lm/watt.

Solid-state lighting: 'The case' 10 years after and future prospects. Phys. Status Solidi A 208, No. 1, 17–29 (2011)

Peter Willis

on [2012-05-17 at 20:07](#) said:

Hi Tom, interesting post but I have to ask the question, if, as you say, "our eyes are adapted to spectrum of our star" why is it we cannot perceive more of the infrared spectrum? Or even have evolved seeing only in the infrared range?

Michael

on [2012-05-20 at 05:15](#) said:

There are probably a couple of reasons including: there is only a single source of visible light (with very few exceptions), the sun, whereas many things give off infrared and the environment becomes saturated with signals. Infrared also has limited resolution capacity compared to visible light. Although ultraviolet has high resolution capacity, is distinguishable from background radiation and is used by many creatures, mammals evolved as predominately nocturnal or crepuscular creatures when ultraviolet light levels are relatively low. Reds and Yellows dominate at these lower light levels which could explain the response of the eyes. We can, of course "feel" infrared with our skin.

Interestingly, snakes have special sensors on their nose which allows them to "see" the prey but it only provides location information and (probably) not an identifiable image.

[tmurphy](#)

on [2012-05-20 at 09:24](#) said:

One needs to appreciate that the term "infrared" covers a huge range of wavelengths (0.7 μm to 100 μm), and properties shift dramatically across these orders of magnitude. The **near infrared**, from 0.7 μm –3 μm , has almost *no* thermal emission from objects at typical environmental temperatures, so is *useless* at night, for instance (just dark). In daytime, 48% of the solar flux arrives in this band (12% short of 400 nm in the UV; 37% for visible light between 400–700), while only 2% emerges past 3 μm —most of which is absorbed in the atmosphere by the greenhouse gases. So adapting thermal infrared vision makes the sun pretty useless as a source.

The point is that having our vision extend into the near infrared might sound really cool (like we would have night/thermal vision), but that's far from true. Useful thermal vision (given atmospheric absorption properties) would come around 8–14 μm —the peak of thermal emission in terrestrial environments is around 10 μm . But even with this, we'd find ourselves bumping into the walls and doorframes of our house, because they offer no thermal contrast. I have an infrared camera, and in many environments (esp. indoors), there is precious little to distinguish.

Steve Pawlak

on [2012-05-20 at 05:50](#) said:

Is making a Wikipedia entry and then publishing a paper to provide the citation cheating? Not if the paper gets published. 😊

My head hurts from all the “electricity” math. This is part of physics that I did not like. I am a mechanical/spatial kind of guy. Thanks for dragging me thru.

I am off to buy Green Laser light bulbs for my house. LOL

Gregor Erbach

on [2012-05-22 at 06:16](#) said:

Many lighting manufacturers use a 3-digit code on the packaging to indicate CRI and colour temperature. The first digit (multiplied by 10) represents the CRI, the other 2 digits (divided by 100) represent the colour temperature in Kelvins. For example, 928 encodes a CRI of 90 and a colour temperature of 2800K.

[tmurphy](#)

on [2012-05-22 at 07:07](#) said:

Fantastic! I did not know this, and will begin to look for it. I am left wishing they allocated another digit to CRI, as there is a pretty big difference in how acceptable 80 vs. 90 is. 86 and 94 would both be represented the same way, but one is far superior to the other. They’ll probably catch on, if they have come as far as putting *something* on the label. Otherwise the better light (likely more expensive) will probably lose market share, and the makers don’t want that to happen.

Comments are closed.

