


Alignment cone to housing clearance

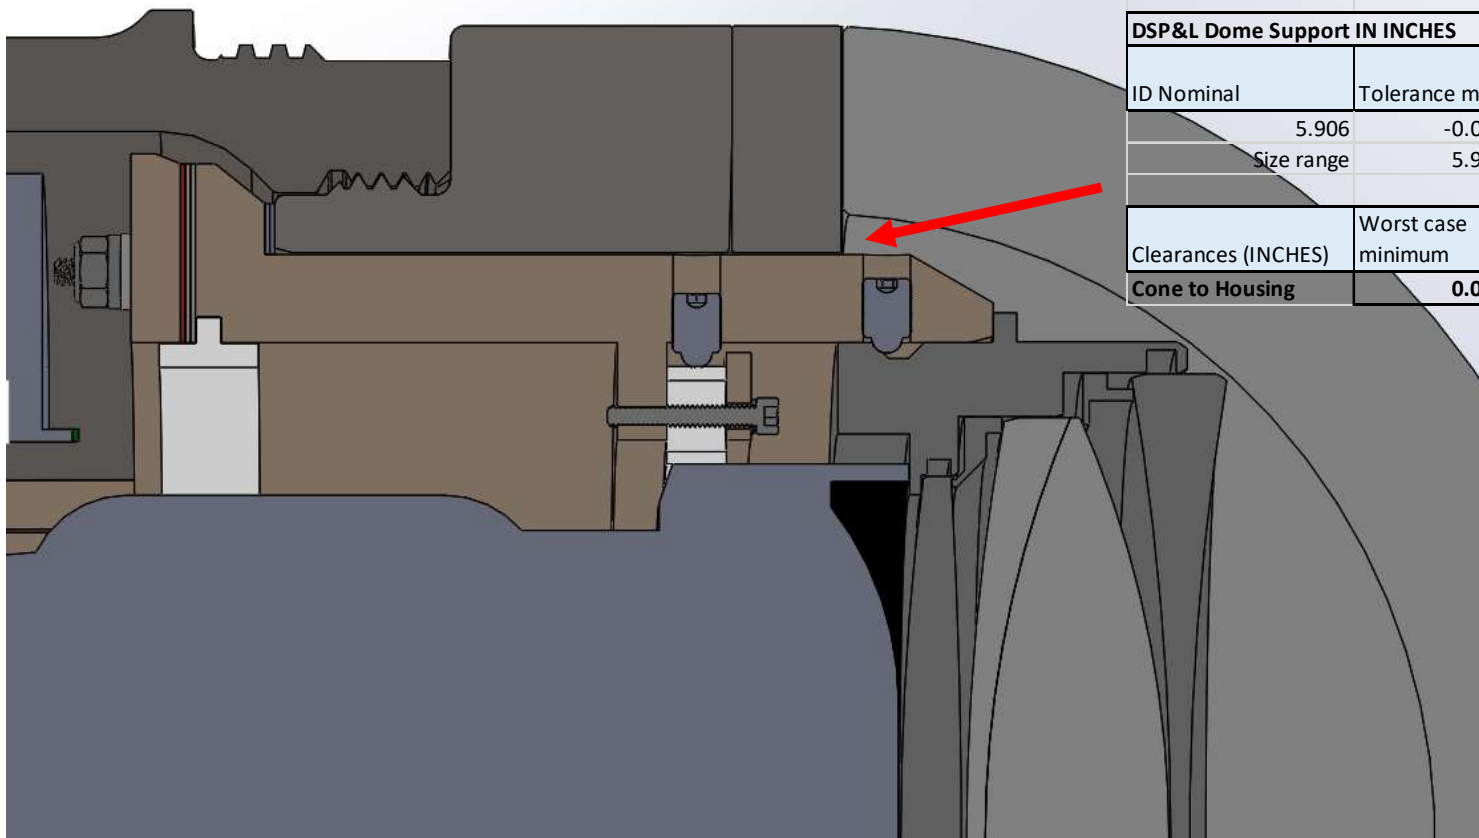

MBARI Alignment Cone IN INCHES		
OD Nominal	Tolerance min.	Tolerance max.
5.886	-0.002	0.000
Size range	5.884	5.886
DSP&L Dome Support IN INCHES		
ID Nominal	Tolerance min.	Tolerance max.
5.906	-0.002	0.002
Size range	5.904	5.908
Clearances (INCHES)	Worst case minimum	Worst case maximum
Cone to Housing	0.009	0.012

July 17, 2020