


Noot to Noot Cable v1

8pin MCIL8M to 8pin MCIL8M straight thru

Thom Maughan 20 Jul 2022



Polyurethane 8 conductor cable, 18awg to 22awg copper wire

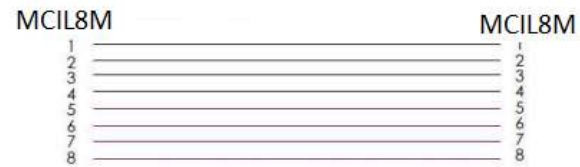

- 1 GND
- 2 POWER (+12v to +20v, 1Amp)
- 3 RX
- 4 TX
- 5 RX
- 6 TX
- 7 Spare1/GND
- 8 Spare2/POWER