


MBN 12 × 2.5 RA V-Thread

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your MBN 12 × 2.5 RA V-Thread today!

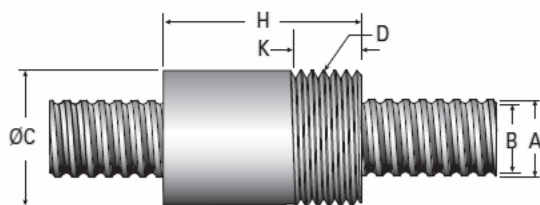

Product Info

Nominal Rod Diameter [mm]	11.75
Material	4150
Thread Direction	RH

Details

Lead [mm]	2.5
Active Turns	5
Nominal Ball Dia. [mm]	1.588
Ball Nut Number	MBN11112
Nut Weight [g]	8.6
Screw Weight [g/m]	215
End Code for Types 1,2, and 3	10
End Code for Types 4	6
End Code for Types 6	10
End Code for Types 7	8

Performance Specifications

Dynamic Load Ca [N]	2980
Static Load [N]	4960
Linear Speed (Based on DN Values) [mm/min]	14600

Forces and Torques

Torque to Raise 1 kN [N·m]	0.443
----------------------------	-------

Screw Dimensions

A [mm]	11.75
B [mm]	10.2

Nut Dimensions

C [mm]	25.5
D [mm]	M20×1.5
H [mm]	39
K [mm]	8
R [mm]	-