


Description	Controlled Customer Copy	Part No.	Revision	Issue	Date
Bottom Lay Cable	Rochester Cable	A711567	A		21 Mar 2024

DESCRIPTION	INCH	MM
<u>ELEMENT A: Optic Tube (1)</u>		
Fiber: 8.2/125/242 μm SM (4)	0.010	0.25
Fiber Colors: Per TIA-598		
Tube: Gel filled Type 304 SS	0.092	2.34
Armor: 10/0.036" GIPS	0.164	4.17
Belt: HDPE – natural	0.260	6.60
<u>STRENGTH MEMBER</u>		
Layer 1: 18/0.049" GIPS void filled	0.356	9.04
Layer 2: 30/0.037" GIPS void filled and taped	0.443	11.25
<u>JACKET</u>		
HDPE – black	0.590 ± 0.003	14.99 ± 0.08

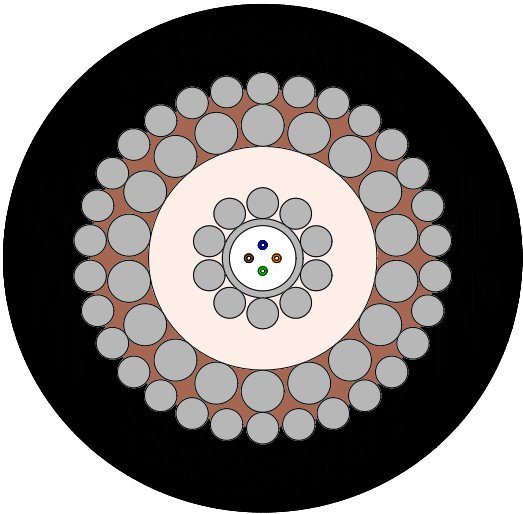

Description	Controlled Customer Copy	Part No.	Revision	Issue	Date
Bottom Lay Cable	Rochester Cable	A711567	A		21 Mar 2024

CABLE CHARACTERISTICS

NOMINAL VALUES @ 20°C

Imperial/US

SI

PHYSICAL

Weight in Air	370 lb/kft	551 kg/km
Weight in Seawater	248 lb/kft	370 kg/km
Specific Gravity	3.0	3.0

MECHANICAL

Breaking Strength	15,000 lbf	67 kN
Installation Load @ 0.37% strain	4,750 lbf	21.1 kN
Recommended Bend Radius ¹	≥ 12 in	≥ 30 cm

OPTICAL

Fiber per ITU-T G.652 D		
Attenuation Rate		
Element A		
@1310 nm	--	0.42 dB/km
@1550 nm	--	0.25 dB/km

¹The relationship between sheave diameter and cable diameter is a critical factor used to establish a product's fatigue resistance or relative serviceability. Operation over smaller than recommended diameters may adversely affect service life

Jurisdiction: Export Administration Regulations (EAR)

Technology ECCN: EAR99

Hardware ECCN: EAR99

HTS Code: 8544.70.0000

Date of Marking: March 21, 2024

This document contains controlled technical data subject to the Export Administration Regulations (EAR). Violations of these export laws and regulations are subject to civil and criminal penalties.

Destination Control Statement (15 CFR § 758.6) - "These items are controlled by the U.S. Government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations."