



1.3 Hardware Identification Sheet


Type: MERMAC SC (2000-19-27)

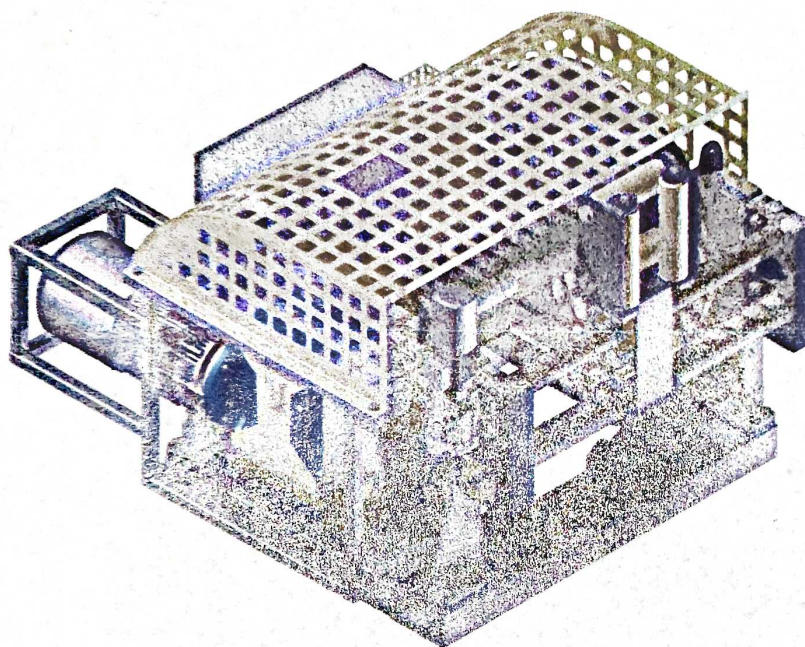

Vertical fleet angle

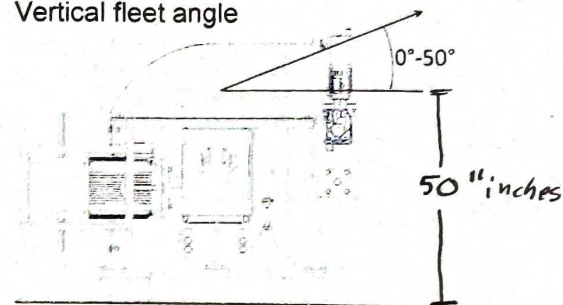

Horizontal fleet angle

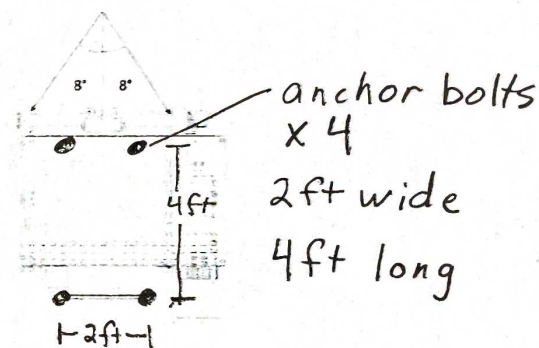

Winch dimensions:

Depth: 1974 mm (77,7 inch)
Height: 1589 mm (62,6 inch)
Width: 1887 mm (74,3 inch)

Drum dimension:

Drum diameter: 305 mm (12 inch)
Flange diameter: 1100 mm (43,3 inch)
Length: 1075 mm (42,3 inch)

Speed/pull 1st layer (SWL):

Line pull: 27 kN $\approx$ 6069 lbs

Motor size:

18,5 kW, 400/690 VAC @ 50/60 Hz 34,5/20 A

Speed: 0-39 m/min @ 60 Hz $\approx$ 127 ft/min

Max. Gross weight:

2950 kg without any cable spooled onto the winch