



Technical Data Sheet

Revision Date	29 April 2019	
Multisorb Part Number	Product Name	Description
02-02091CG11	Natrasorb® S Tyvek® One Unit	Granular Silica Gel in printed Tyvek®

MATERIALS OF CONSTRUCTION

Components	Uncoated Tyvek®	Granular Silica Gel	Ink (21 CFR Part 175)
-------------------	-----------------	---------------------	-----------------------

PHYSICAL ATTRIBUTES


Attribute	Specification	Comments
Weight	1 Unit	Unit of Adsorption as Defined in MIL-D-3464.
Length	6.00" ± 0.14"	152.40mm ± 3.56mm
Width	1.50" ± 0.03"	38.10mm ± 0.76mm
Adsorption Capacity	MIL-D-3464	A Unit weight of desiccant will adsorb at least 2.85 grams of moisture at 20% R.H. @ 25°C and 5.70 grams of moisture at 40% R.H. @ 25°C.
Printing	Military Specification	Product Line Name, Description, Manufacturer, Unit Size.

PACKAGING, LABELING, PRODUCT STORAGE, AND WARRANTY PERIOD

Attribute	Specification	Comments
Quantity	300 desiccant packets	Per foil liner with a HIC per case.
Labeling	Manufacturer's CAUTION label on the case.	
	Manufacturer's name, description of desiccant, quantity per container, part number, and control number.	
Product Storage	Recommended storage in a non-condensing environment. Avoid temperatures above 90°F (32°C).	
Warranty Period	Product meets specified physical attributes for a period of 3 years from date of manufacture when stored in original unopened packaging.	

EXCEPT TO THE EXTENT REQUIRED BY STATE LAW, SELLER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Natrasorb General Dimensions:
Refer to Technical Data Sheet 1
for current specifications.

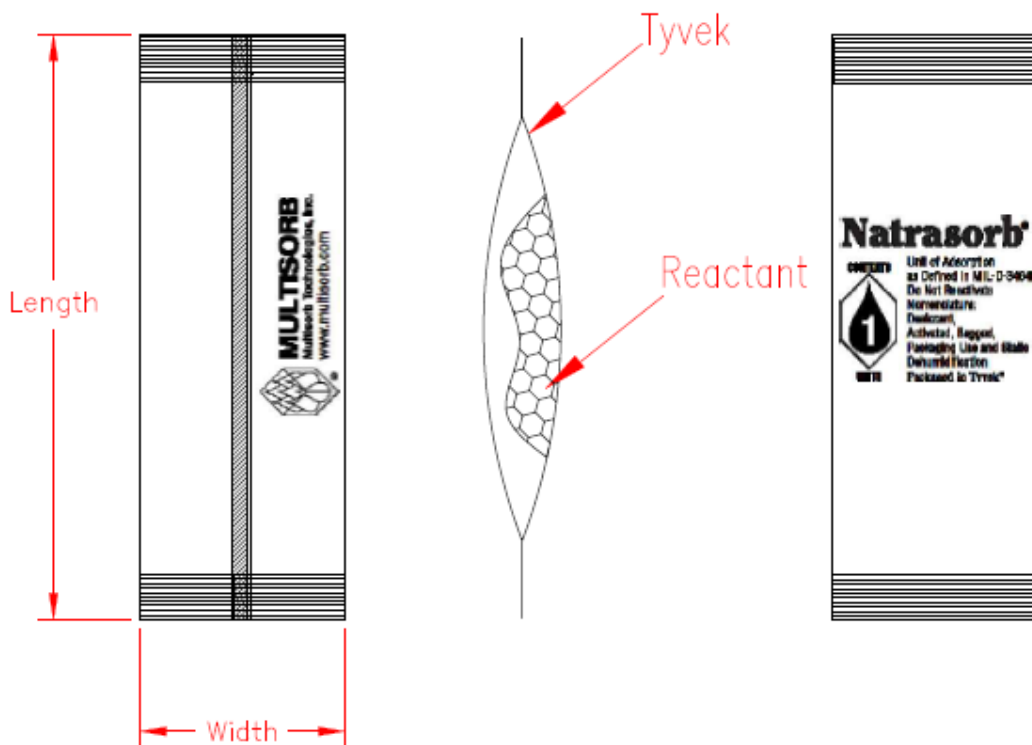

NOTE: Color may not be exactly as shown.

EXCEPT TO THE EXTENT REQUIRED BY STATE LAW, SELLER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.