

# GORTITE® GORTIFLEX® CT STOCK CONVOLUTED TUBING


PROTECTIVE COVERS AND FLEXIBLE CONNECTIONS AVAILABLE IN 13 STOCK SIZES

Gortiflex® bellows units can be used as covers for screws, rods, ball spline, or any application requiring protection against chips, dirt, grit, and other abrasive matter. Units can also be applied as flexible connections where vibration, movement, or misalignment are involved.

Gortiflex® bellows units are manufactured of Neoprene/nylon material, .050 to .060 gauge and are available in 13 stock sizes ranging from 1" I.D. to 10" I.D. for immediate delivery. Bellows will provide 24" open length and stocked units have 1" long collars on each end for mounting. Collars can be removed to provide flanges for mounting if required.

Gortiflex® bellows units are completely sealed. If covers are to be used in rod or ram applications, breathing method must be provided. For special materials, non-standard lengths or ends and unusual applications, please use the Enclosed-Shape Bellows Request For Quote Form.

C208 Clamps are stocked in any size required. Clamp band width is 1/2".

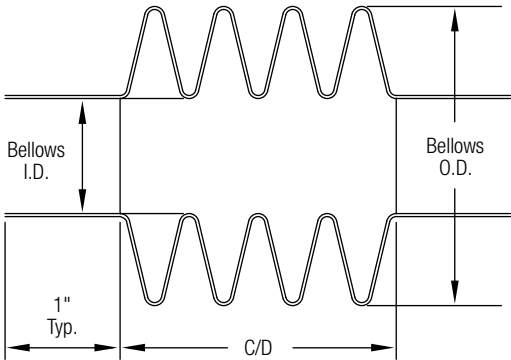

| STYLE NUMBER             | CT-1                              | CT-1.5 | CT-2 | CT-2.5 | CT-3   | CT-3.5 | CT-4   | CT-4.5 | CT-5   | CT-6   | CT-7                              | CT-8   | CT-10  |
|--------------------------|-----------------------------------|--------|------|--------|--------|--------|--------|--------|--------|--------|-----------------------------------|--------|--------|
| Bellows Inside Diameter  | 1"                                | 1-1/2" | 2"   | 2-1/2" | 3"     | 3-1/2" | 4"     | 4-1/2" | 5"     | 6"     | 7"                                | 8"     | 10"    |
| Bellows Outside Diameter | 1-3/4"                            | 2-3/8" | 3"   | 3-1/2" | 4-1/4" | 5"     | 5-1/2" | 6"     | 6-3/4" | 8"     | 9"                                | 10"    | 12"    |
| Extended Length (C)      | 24"                               | 24"    | 24"  | 24"    | 24"    | 24"    | 24"    | 24"    | 24"    | 24"    | 24"                               | 24"    | 24"    |
| Retracted Length (D)     | 5-1/4"                            | 4-1/2" | 4"   | 4"     | 3-1/4" | 3"     | 3"     | 3"     | 2-1/2" | 2-1/4" | 2-1/4"                            | 2-1/4" | 2-1/4" |
| Material                 | Neoprene/Nylon .040 to .045 Gauge |        |      |        |        |        |        |        |        |        | Neoprene/Nylon .050 to .060 Gauge |        |        |
| Operating Temperature    | -45°F to 220°F                    |        |      |        |        |        |        |        |        |        |                                   |        |        |



# GORTITE® GORTIFLEX® CTH

## STOCK CONVOLUTED TUBING

### STYLE CTH PROTECTIVE COVERS AND FLEXIBLE CONNECTIONS

Elastomer protective covers available in six stock sizes with variable collar diameters.


Gortiflex® CTH units can be used for most light duty environments or when an aesthetic cover is required for protection from dust, grit, oil, etc.

Gortiflex® CTH units are manufactured of .030 Goralon™ Elastomer and are available in six stock sizes ranging from 3/4" I.D. to 2" I.D. in both 12" and 24" lengths. Inside flanges on both ends of the units accept a snap-in collar

to achieve the desired connecting I.D. By stocking various snap-in collar I.D.'s, many different sizes can be accommodated in a stock bellows. Goralon™ material has excellent ozone, abrasion and oil resistance. Temperature range is from -40° F to +280° F.

**Snap-in Collars** are 3/4" long and are made of black polyurethane.

**C208 Clamps** are stocked in any size required. Clamp band width is 1/2".

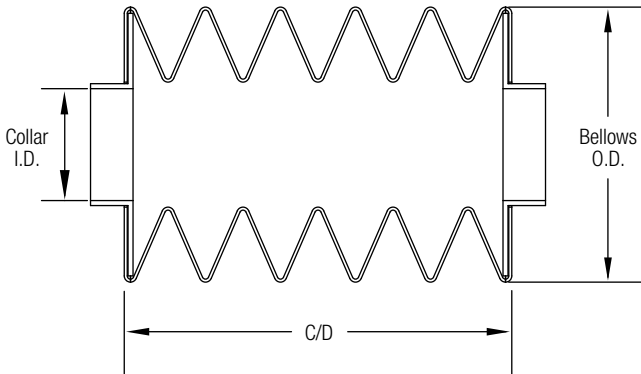

| STYLE NUMBER | BELLOWS INSIDE DIAMETER | BELLOWS OUTSIDE DIAMETER | C EXTENDED LENGTH | D RETRACTED LENGTH | SNAP-IN COLLAR SIZES AVAILABLE (I.D.'S)   |
|--------------|-------------------------|--------------------------|-------------------|--------------------|-------------------------------------------|
| CTH-.75-12   | 3/4"                    | 1-5/8"                   | 12"               | 1-7/8"             | 1/4", 1/2", 3/4" and 1"                   |
| CTH-.75-24   | 3/4"                    | 1-5/8"                   | 24"               | 3-3/4"             | 1/4", 1/2", 3/4" and 1"                   |
| CTH-1.375-12 | 1-3/8"                  | 2-1/2"                   | 12"               | 1-3/8"             | 1/2", 3/4", 1", 1-1/4", 1-1/2" and 1-3/4" |
| CTH-1.375-24 | 1-3/8"                  | 2-1/2"                   | 24"               | 2-3/4"             | 1/2", 3/4", 1", 1-1/4", 1-1/2" and 1-3/4" |
| CTH-2-12     | 2"                      | 3-1/4"                   | 12"               | 1"                 | 1", 1-1/4", 1-1/2", 1-3/4", 2" and 2-1/4" |
| CTH-2-24     | 2"                      | 3-1/4"                   | 24"               | 2"                 | 1", 1-1/4", 1-1/2", 1-3/4", 2" and 2-1/4" |



# REQUEST FOR QUOTE

## GORTIFLEX® STOCK CONVOLUTED TUBING



Date \_\_\_\_\_  
Company Name \_\_\_\_\_  
Contact \_\_\_\_\_  
Quantity \_\_\_\_\_

Address \_\_\_\_\_  
City \_\_\_\_\_ State/Prov. \_\_\_\_\_  
Country \_\_\_\_\_ Zip/Postal Code \_\_\_\_\_  
Telephone \_\_\_\_\_ Fax \_\_\_\_\_  
Email \_\_\_\_\_

### 1. STYLE NUMBER\*

\* denotes a required field

#### Bellows For\*:

☐ New Design ☐ Replace Existing Cover

#### CT

☐ CT-1 ☐ CT-1.5 ☐ CT-2 ☐ CT-2.5  
☐ CT-3 ☐ CT-3.5 ☐ CT-4 ☐ CT-4.5  
☐ CT-5 ☐ CT-6 ☐ CT-7 ☐ CT-8  
☐ CT-10

#### CTH

☐ CTH-.75-12 ☐ CTH-.75-24 ☐ CTH-1.375-12  
☐ CTH-1.375-24 ☐ CTH-2-12 ☐ CTH-2-24

### 2. SNAP-IN COLLAR DIMENSIONS (CTH STYLE ONLY)

End #1 Inside Diameter (I.D.): \_\_\_\_\_

End #2 Inside Diameter (I.D.): \_\_\_\_\_

### 3. CLAMPS

☐ C208 Clamp (.5" ID Minimum)

*Note: C208 clamps are stocked in any size required. Clamp band is .5" wide.*

▼ Please fax or email the completed form to the number/address shown.

#### A&A Gortite®

Division of A&A Manufacturing

Toll Free: 800-298-2066

Fax: 262-786-3280

Email: [sales@aaman.com](mailto:sales@aaman.com)