

flex concepts inc.

home

flexible bioSolution containment systems

pillow bags

3-D Bags

Motion/Rocker/Wave

rigid bioSolution containment devices

flex mixing system

flex films/types

tube sets & manifolds

flex tubing welder

temperature
controlled storage &
transfer barrels


tubing, fittings
& accessories

flex container liners

about flex concepts

contact flex concepts

Pillow Bags

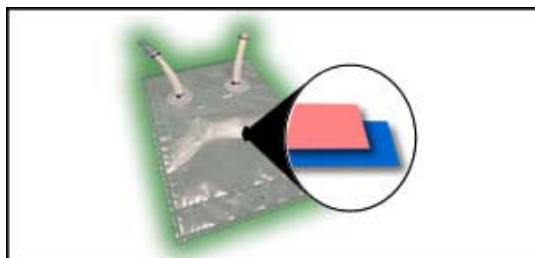


1-2 Port Double (2 PLY) Barrier Bag

1-2 Port Double (2 PLY) Barrier Bag	
Sizes:	50ml, 100ml, 1L, 2L, 5L, 10L, 20L, 50L
Ports:	1-2 Ports, Male & Female Luer Locks and Qk Connect Insert & Body, Injection site
Tubing:	1/8" to 1/4" Inside Diameter, Std. Length 24" (Length to Order)
Other:	Hanging rods/handles available on 2L-50L sizes
Film:	Inner Barrier: Flex 100 Virgin LDPE (Product Contact Layer) Outer Barrier: Flex 150 EVOH Nylon Film (Strength & Gas Barrier)



1-2 Port Single (1 PLY) Barrier Bag

1-2 Port Double (2 PLY) Barrier Bag	
Sizes:	50ml, 100ml, 1L, 2L, 5L, 10L, 20L, 50L
Ports:	1-2 Ports, Male & Female Luer Locks and Qk Connect Insert & Body, Injection site
Tubing:	1/8" to 1/4" Inside Diameter, Std. Length 24" (Length to Order)
Other:	Hanging rods/handles available
Film Options:	• Flex 200 Single PLY, 5 Layer 11ml Robust Film (Inner Layer Virgin LDPE) • Flex 600 Ultra Clear Single Ply, Multiple Layer 14mil Film • Flex 400 Kynar Rx Single Ply Film

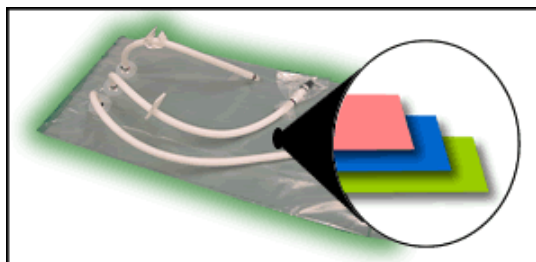

2-3 Port Triple (3 PLY) Barrier Bag

2-3 Port Triple (3 PLY) Barrier Bag	
Sizes::	10L, 20L, 50L, 100L, 200L
Ports:	2 to 3 Ports, Male & Female Luer Locks & Qk Connect Insert & Body, Injection site
Tubing:	1/8" to 1/4" Diameter, Std. Length 24" (Length to Order)
Film Options:	Inner Barrier: Flex 100 Virgin LDPE (Product Contact Layer) Middle Barrier: Flex 100 Virgin LDPE (Product Security Layer) Outer Barrier: Flex 150 EVOH Nylon Film (Strength & Gas Barrier)



2-3 Port Single (1 PLY) Barrier Bag

2-3 Port Single (1 PLY) Barrier Bag	
Sizes:	10L, 20L, 50L, 100L, 200L
Ports:	2-3 Ports, Male & Female Luer Locks and Qk Connect Insert & Body, Injection site
Tubing:	1/8" to 1/4" Inside Diameter, Std. Length 24" (Length to Order)
Other:	Hanging rods/handles available
Film Options:	• Flex 200 Single PLY, 5 Layer 11ml Robust Film (Inner Layer Virgin LDPE) • Flex 600 Ultra Clear Single Ply, Multiple Layer 14mil Film • Flex 400 Kynar Rx Single Ply Film



3 End Ported Bag

3 End Ported Bag	
Sizes:	50ml, 100ml, 1L, 2L, 5L, 10L, 20L
Ports:	1-3 Ports, Male & Female Luer Locks and Qk Connect Insert & Body, Injection site
Tubing:	1/8" to 3/8" Inside Diameter, Std. Length 24" (Length to Order)
Other:	Hanging rods/handles standard on 1L - 20L
Multi-Ply Film:	Inner Barrier: Flex 100 Virgin LDPE (Product Contact Layer) Middle Barrier: Flex 100 Virgin LDPE (Product Security Layer) Outer Barrier: Flex 150 EVOH Nylon Film (Strength & Gas Barrier)
Single Ply Multi-Layer Film Options:	• Flex 200 Single PLY, 5 Layer 11ml Robust Film (Inner Layer Virgin LDPE) • Flex 600 Ultra Clear Single Ply, Multiple Layer 14mil Film • Flex 400 Kynar Rx Single Ply Film