



Mobile inPHorm Design Analysis

Compound Selection

Compound No.: N0674-70
 Durometer: 70
 Polymer Family: Nitrile
 Uses: General Purpose, MIL-G-21569 CL 1, UL Listed
 Low Temp: -30°F
 High Temp: 250°F
 Color: BLACK

Gland Design - Radial Static

Series: 2-0XX (0.070" c/s)
 Size: 2-010 (0.239" ID)
 Application: Male Static Seal
 Unit of Measure: in

2-010 O-Ring Dimensions (in)

	Nominal	+/-tol
Inner Diameter(ID)	0.239	0.005
Cross Section(W)	0.070	0.003

Male Static Seal Suggested Gland Dimensions

	Nominal	+tol	-tol
Groove Diameter:	.285	0.001	.001
Groove Width:	0.093	0.005	0.000
Piston Diameter:	.384	0.000	0.000
Bore Diameter:	.384	0	0.000

Resulting Tolerance Stackups

	Min	Nom	Max	Ideal
Stretch	16.39%	19.25%	22.22%	0-5%
Squeeze	16.24%	21.52%	26.32%	22-32%
Volume Fill	64.84%	77.23%	86.91%	60-90%
Diametral Clearance	0.000	0.000	0.000	> 0

Pressure Rating with single O-ring (N0674-70): 3000 (psi)


DANGER: FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF SEALS OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This software provides product options for your further investigation. Before using any product, it is important that you analyze all aspects of your application and review the information concerning the product in the current product catalog. Depending on your application, further analysis and testing may be necessary before a suitable product can be selected. Parker shall not be liable for any incidental, consequential or special damages that arise from the use of any product or this software.

Note: inPHorm size calculations conform to the standard O-ring sizes per AS 568A as shown in Table B6 of the on-line REFERENCE GUIDE (Parker Catalog ORD5700). The 5 dash series sizes are non-standard and have been created to special tooling specifications. The dimensions may vary due to materials with unusual shrinkage.



Mobile inPHorm Design Analysis

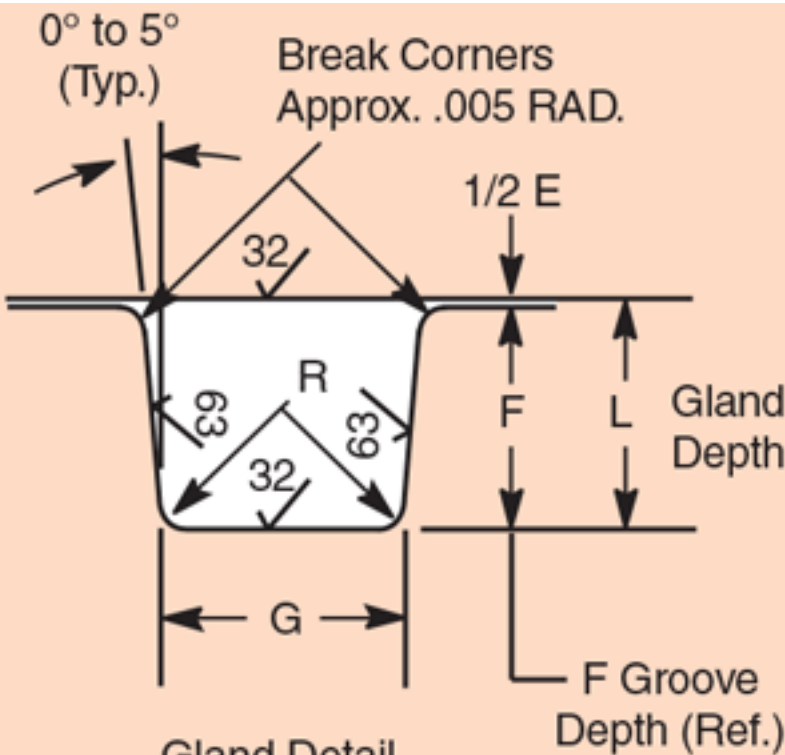

Gland Detail
Finishes are RMS values.

