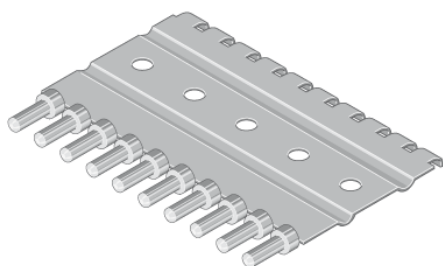


Order code: 074-1-006-0-C1SFH-ZS0


1) IC-SOCKETS, STRIPS, CARRIERS

Series: **074**


Carrier sockets with removable brass carriers for ultra low profile socket solutions.

SIL carrier socket.

Gender Female
Pitch (mm) 2,54
Mating pin size (range) $\varnothing$ 0,40-0,56, sq. 0,25x0,45
No of contacts 6
Contact type C1 - For Carrier Standard

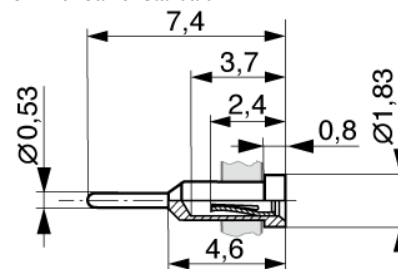

Material contact Copper alloy
Material clip Beryllium copper
Plating contact Au
Plating clip Au 0,75 μ
Rated current 3,0 A
Rated voltage 150 V_{RMS} / V_{DC}
Withstand voltage 1000 V_{RMS} for 1 minute
Operating temperature -55°C to +125°C
Max. processing temper. 260°C for 10 seconds
Packaging Standard

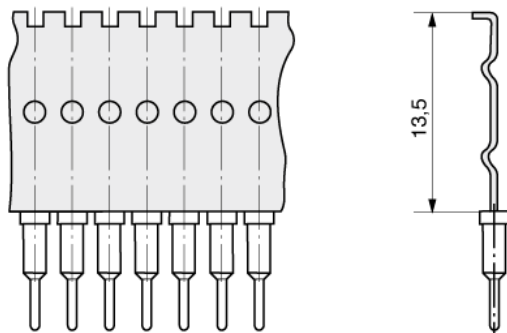[RoHS compliant](#)**Order code: 074-1-006-0-C1SFH-ZS0**

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 13.07.2020 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=074-1-006-0-C1SFH-ZS0