


Integrable ACT 201 H "mini Board" controller technical characteristics

ACT 201 H mini Board

Overall dimensions: 3.94 x 3.94 x 1.38 inch
(100 x 100 x 35 mm)

Dimensions in inch (mm)

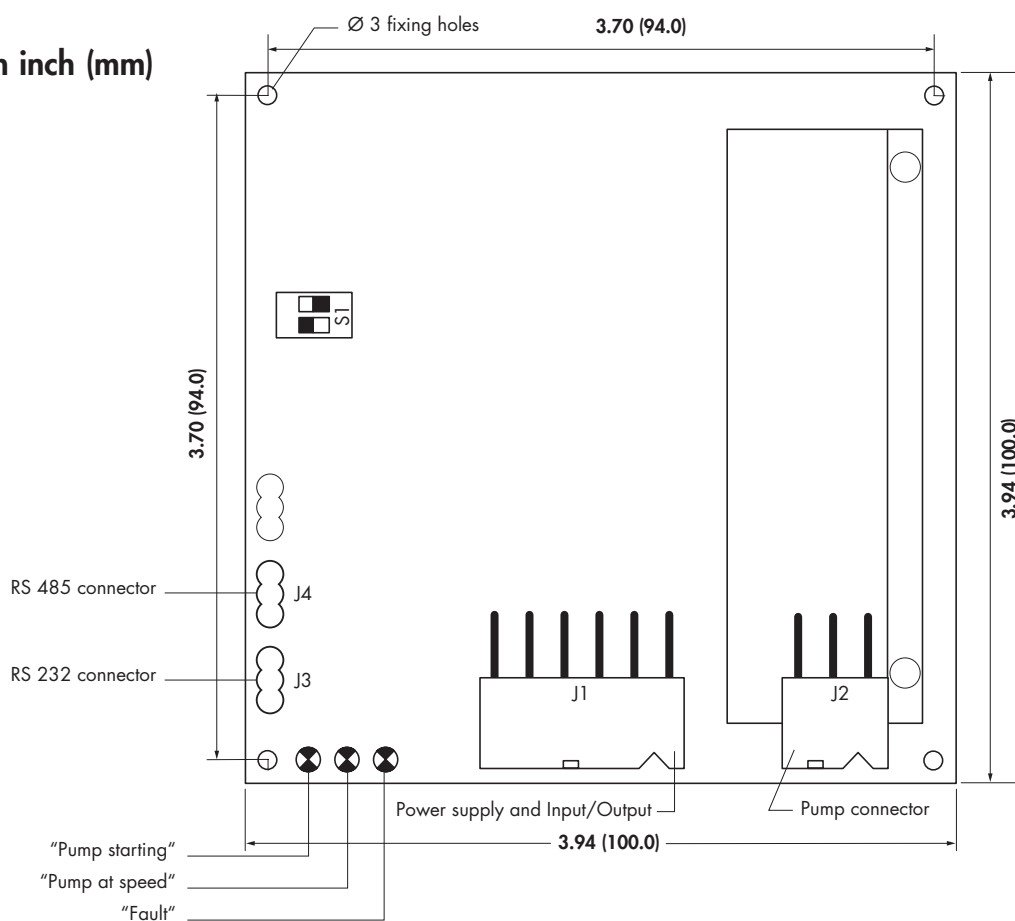

Supplying power to the ACT 201 H mini Board

Connector J1: Molex mini fit JR 12 pts P/N. 39 - 01 - 2125 equipped with 12 contacts P/N. 39 - 00 - 0039 (not supplied)

Serial links

Connectors J3, J4: HE-14 - 3 pts female - P/N. 65240-03 equipped with 3 contacts P/N. 76347-301 FCI (not supplied).

DC voltage necessary to power the board: + 24 V / 4 A

Main supply and remote control: **see B 81.**