

Nitrogen purge connection for corrosive version


Characteristics of filtered dry nitrogen supply

A filtered dry nitrogen supply with the following characteristics is required:

- Dew point < 22°C
- Dust < 1µm
- Oil < 0.1ppm
- Absolute pressure of 750 to 1125 torr (1 to 1.5 bar).

Purge connection (DN 16 ISO-KF* Fitting)

«PURGE» port: Connect the filter then the nitrogen pipe using the clamps. The filter guarantees a flow rate of 25 SCCM at a pressure of 825 torr (1.1 bar).

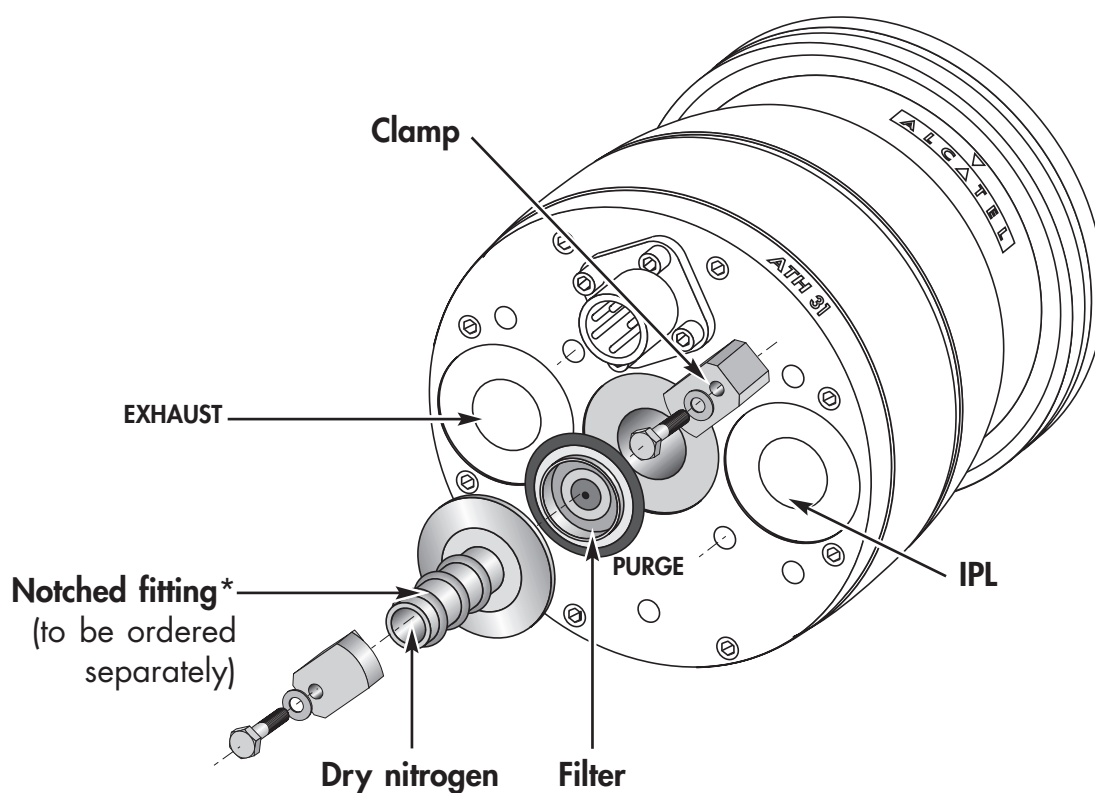

* Different connection accessories can be found in the Alcatel Catalog.