


HF35HA-1

※Photograph is a similar model.

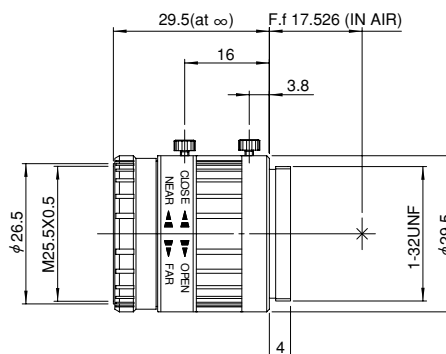

Unit : mm

Model		HF35HA-1
Focal Length		35mm
Iris Range		F1.6 ~ Close
Operation	Iris	Manual (Op.Angle 63°)
	Focus	Manual (Op.Angle 163°42') (*1)
Angle Of View (H × V)	2/3"	14°20' × 10°46'
	1/2"	10°27' × 7°51'
	1/3"	7°51' × 5°53'
	1/4"	5°53' × 4°25'
Focusing Range (From Front Of The Lens)		∞ ~ 0.25m
Object Dimensions at M.O.D. (H × V)	2/3"	59mm × 44mm
	1/2"	43mm × 32mm
	1/3"	32mm × 24mm
	1/4"	24mm × 18mm
Back Focal Distance (in air)		15.03mm
Filter Thread		M25.5 × 0.5mm
Mount		C Mount
Mass		45g
Exit Pupil Position (From Image Plane)		-26.6mm

(*1) Corresponds to Focus Range

- With Metal Mount
- With Locking Knob for Iris and Focus