


**EFFICIENT INTERNAL
REFLECTOR DESIGN**

**FAST, TOOL-FREE
RELAMPING**

LOW MAINTENANCE

**ACCEPTS VARIETY OF
LAMPS**

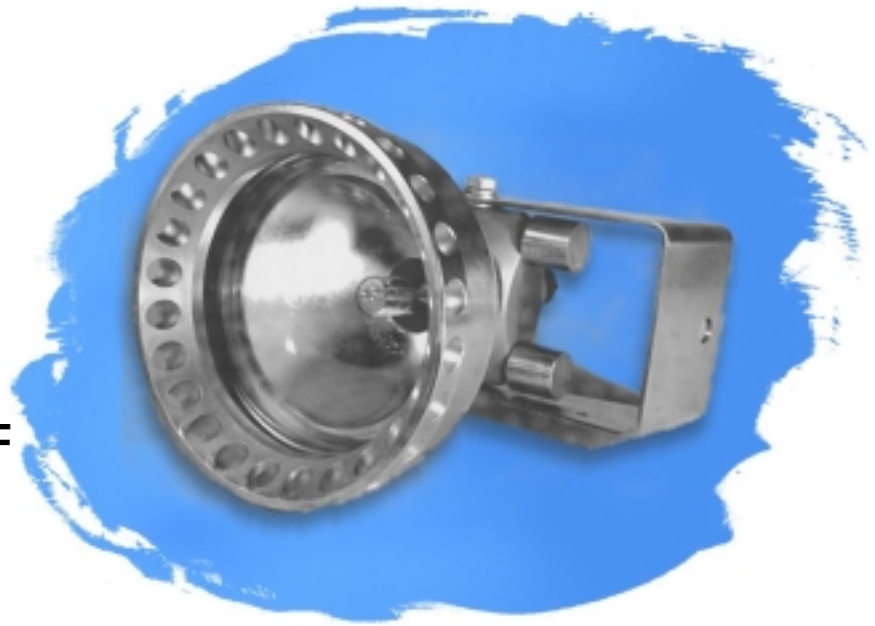

Designed for underwater motion picture filming, tourist submarines, and other manned submersibles, the Super-SeaLite is the light of choice for applications requiring wide area illumination. The 150-meter (500 feet) depth-rated Super-SeaLite is constructed of 316L stainless steel, and is designed to provide years of reliable service. The Super-SeaLite accepts PAR 36 sealed beam lamps, single-ended incandescents, and 3200 degree Kelvin stage and studio lamps.

Relamping requires no tools, and in most instances, removal from the mount is not necessary. The relamping procedure preserves the front lens seal, which has a completely elastomerized lens seat for shock and impact resistance. The internal reflector design affords easy removal of marine growth from the outer lens, assuring consistent lighting performance during long term submergences. Optimal positioning of the fixture for each task is accomplished by a fully adjustable mounting bracket.

Super-SeaLite Specifications

MECHANICAL

Outer Diameter:	16.3 cm (6.5 in.)
Length (without connector):	20.3 cm (8.1 in.)
Weight in Air:	4.5 kg (10 lbs.)
Weight in Water:	2.4 kg (5.4 lbs.)
Material:	316L stainless steel
Finish:	Electropolish
Lens:	Molded, tempered borosilicate, clear or frosted
Reflector:	Aluminum, diffuse, specular
Beam Pattern:	90 degrees underwater

ELECTRICAL

Operating Voltages:	120 to 240 volts AC or DC
Available Wattages:	500 to 1000
Color Temperature:	3000 to 3200 degrees Kelvin
Lamp Life:	300 to 2000 manufacturer-rated hours
Connectors:	Designed to accommodate many connector types
Insulation Resistance:	1000 volts
Hi-Pot:	500 volts

ENVIRONMENTAL

Depth:	150 meters (500 FSW)
--------	----------------------

REPLACEMENT LAMPS

Model Number	Part Number	Volts	Watts	Hours	Color Temp	Lumens
B9-120/500L		120	500	2000	3000K	10,600
B9-120/650		120	650	300	3150K	17,000
B9-120/750L		120	750	2000	3000K	15,400
B9-120/1000		120	1000	300	3200K	27,500
B9-240/500		240	500	400	3000K	10,500
B9-240/650		240	650	300	3100K	15,000
B9-240/1000		240	1000	300	3200K	25,500



Specifications subject to change without notice

DEEPPSEA POWER & LIGHT • 3855 Ruffin Rd. • San Diego, CA 92123 USA • TEL (858) 576-1261 • FAX (858) 576-0219

Web: <http://www.deepsea.com> • e-mail: info@deepsea.com

Rev. 12/29/99