

X-Band radar derived sea surface elevation maps as input to ship motion forecasting

Konstanze Reichert², Jens Dannenberg¹ and Henk van den Boom³

¹OceanWaveS GmbH, Lüneburg, Germany

²OceanWaveS Pacific Ltd, Wellington, New Zealand

³Marin, Netherlands

Abstract: Nautical X-Band radars used for navigation can also be used to determine spectral and individual wave properties. The sea surface reflects the incident radar beams and wave fronts become visible as stripe like pattern of high back scatter on the radar screen. When connected to a conventional nautical X-Band radar, the Wave Monitoring System WaMoS II exploits this imaging of waves to detect full directional wave spectra and to derive statistical sea state parameters as well as surface currents. WaMoS II is continuously improved with new features being developed. In particular, the sea surface elevation maps derived by WaMoS II allow to investigate and describe the spatial and temporal development of 3D ocean surface waves. The *European Joint Industry Project 'On board Wave and Motion Estimator (OWME)'* used this measurement technique to provide the wave information that is required to predict periods of quiescent vessel motions. A task that offers valuable support for various offshore operations like e.g. the tensioning of a tanker or the landing of a helicopter. This contribution gives an overview of the overall OWME system design showing first validation results, focusing on the method to derive wave trains using the WaMoS II system.

I. INTRODUCTION

Many offshore operations are critically dependent on the prevailing sea state. Regarding safety of loading and crew, the development of systems to identify specific sea states automatically, and to provide decision guidance for the crew is discussed more and more within the shipping community.

Also the ability to predict vessel motions in real time is of critical importance in the shipping and offshore industry. Certain types of operations, such as float-over-installation, ROV handling and helicopter landing depend heavily on wave impact or wave induced motions. In many cases a short time quiescent period in vessel motions is sufficient to conduct a specific operation. So far, go/no-go decisions can only be made on the basis of eye observations of the incoming waves by experienced crew. Also numerical extrapolation from the vessel motions history can only predict the motions up to some 10 seconds ahead. To extend the prediction times of such quiescent periods, the Joint Industry Project 'On-board Wave and Motion Estimator' (OWME) was set-up.

The project run by a partnership consisting of MARIN, TU-Delft and OceanWaveS GmbH focused on offshore applications in mild sea states. The requirement of the project was the development of a system capable to determine the vessel motions up to two minutes ahead [3].

In this paper, emphasis is laid on the first of the three tasks described above, i.e. the development of a measurement technique to provide the wave information needed for the OWME system. This included the overall OWME approach, as well as the wave measuring method. Finally, some results of the sea trial are reported. The numerical modeling will not be covered here, see Ref [3].

II. THE OWME CONCEPT

Regardless of the actual design, a motion prediction system has to solve three main tasks: It needs to account for the actual sea state and weather condition, either by measurements or forecasts. The development of the sea state has to be predicted for the time horizon that is needed for the motion prediction. And finally, the system has to estimate the vessels response to this predicted wave environment. These three tasks have to be solved with high update rates and low processing times, otherwise the prediction arrives too late to be useful.

In OWME, solutions for these three tasks were catered for mainly by improving existing technologies and integrating them into a working wave motion predictor. The focus in OWME was to predict quiescent periods for a time horizon of up to two minutes.

Figure 1 shows the design and data flow of the OWME motion predictor and the set-up used for its validation. The OWME predictor uses a navigational radar to measure the waves in a distance of several 100 meters off the vessel. The individual waves are extracted from the radar images, then a numerical propagation model is used to predict the waves at the vessel location. From the full polar radar images, only for the quadrant that points in the waves, one-dimensional sea surface elevation time series were derived, that were fed into the wave propagation model. The propagation model then computed the wave elevations at the location of the vessel up

to two minutes ahead. By this approach, the time that the recorded waves needed to cover the distance to the vessel determined the prediction horizon of the system. Finally, the predicted wave elevations were fed into a numerical model to estimate the vessels response. Applying ship motion theory on these waves, the vessel motions in all six modes were computed [3].

After its development the OWME approach was successfully tested aboard a vessel under real conditions. Most critical in this approach was the computational time required to conduct the data processing – the longer the data processing takes, the shorter the prediction time will be.

All of the data processing was completed by the CPU in just 13 seconds on a quad-core PC leaving approx. 2 minutes prediction time.

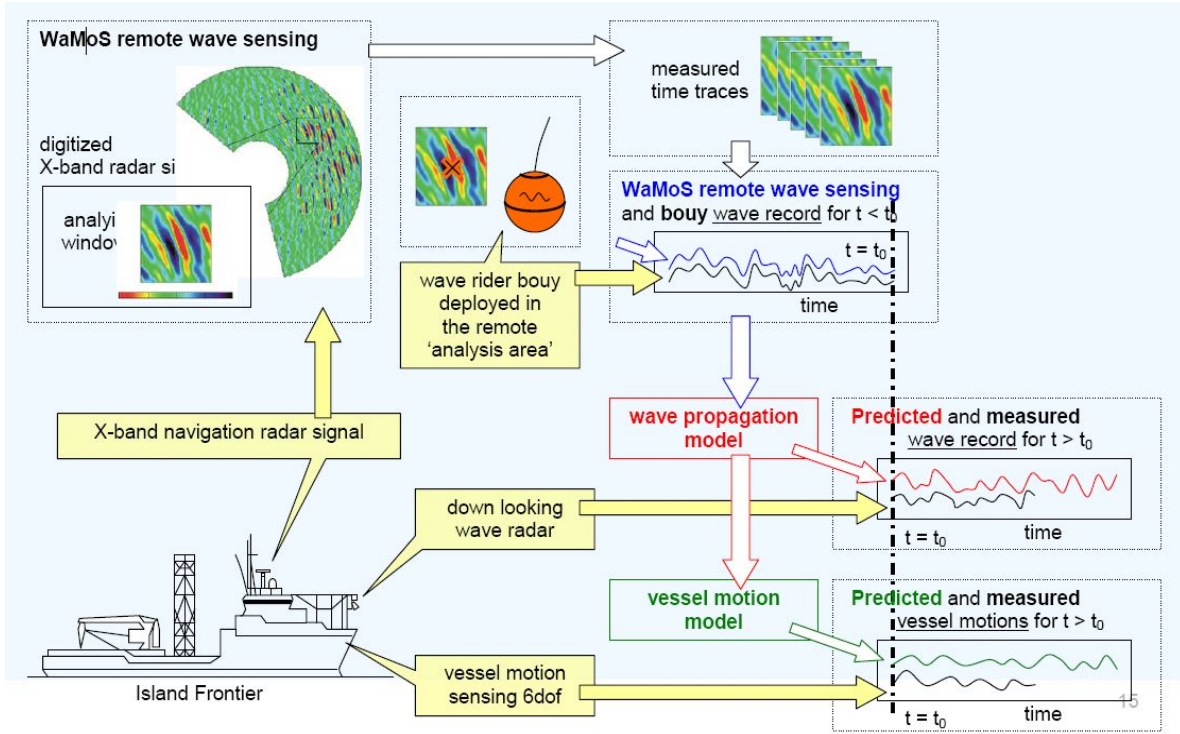


Figure 1: OWME real time prediction scheme. Sea surface elevations are retrieved from X-band radar data. A 1-D wave height series is then fed into a wave forecasting model, which then is used as input to the vessel motion prediction model.

III. CRITERIA FOR THE WAVE SENSOR

The OWME on-board vessel motion predictor requested a wave sensor that had to fulfill several criteria: It had to be fully functional while the vessel was traveling. This restricted the choice of sensors to remote sensing techniques. Preferably, the sensor had to be mounted on the vessel itself.

Alternatives like airborne or satellite remote sensing did not provide the full temporal coverage needed and were too costly to support operations on a day-to-day basis. Suitable existing on board remote sensing techniques are altimeters (down looking radar or lidar) or navigational radar which can provide measurements close to the vessel – either at a point or area covering.

The main advantage of scanning a larger area is the capability to detect the waves in some distance to the vessel,

thus exploiting the wave propagation time to extend the prediction time.

From the range of existing measurement techniques, the use of marine radar seemed to be one of the best options to fulfill all above listed criteria.

Nautical radars are designed to monitor larger areas in the vicinity of the vessel and can operate under harsh weather conditions. They are not effected by daylight, fog or heavy ship motions. In OWME the decision was for the Wave Monitoring System WaMoS II that delivers wave spectra and statistical sea state parameters as its standard output[5]. New functions were included to retrieve 3D-sea surface elevation maps [4].

IV. SEA SURFACE ELEVATION MAPS

In addition to the standard spectral analysis, individual waves can be determined from radar images. To retrieve the so-called sea surface elevation maps, sequences of several nautical radar images are 'inverted' [4]. This approach allows to reconstruct the wave field from the radar signatures. It considers shadowing to be the main imaging mechanism of ocean gravity waves in nautical radar images and is based on

linear wave theory. It is assumed that the sea surface elevation consists of a linear superposition of several individual sinusoidal waves, each fulfilling the dispersion relation. By means of a FFT, a band pass filter based on the gravity wave dispersion relation, and the application of a transfer function, the imaging process of waves can be inverted as sketched in Figure 2 by an inverse FFT.

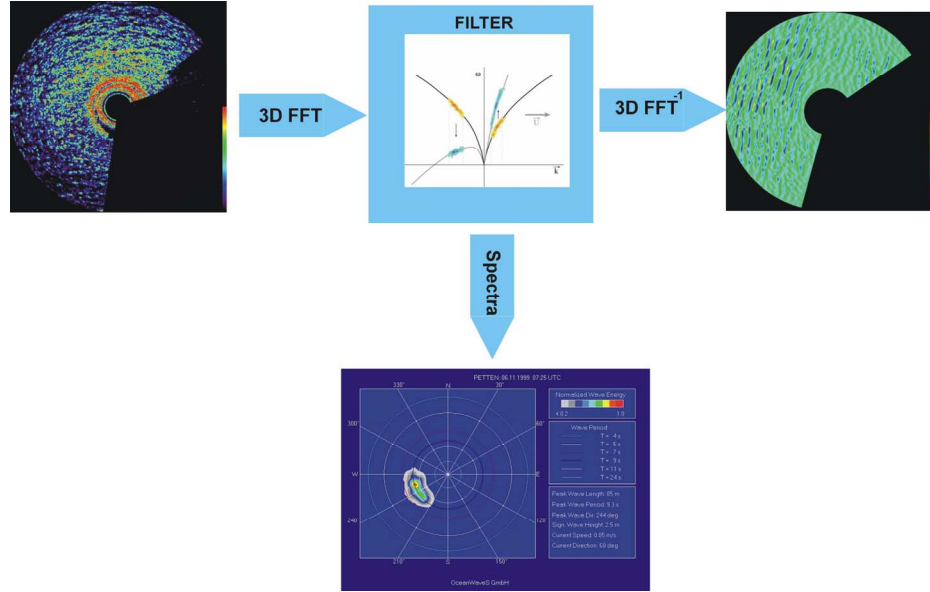


Figure 2: Deriving the sea surface elevation from radar images.

With this method, it is possible to retrieve the local wave elevation for each point in the radar field of view (Figure 2, right) in addition to the also available wave spectra (Figure 2, bottom). The resulting sea surface elevation map has the same spatial and temporal resolution as the input radar image. The performance of this measurement technique was applied in several research projects at different locations with good results [2].

For the particular task of the OWME motion predictor, this kind of data product fulfilled the main requirements as listed in Section 2. Also the measurements are fully continuous. Still, there were some modifications needed to comply also with the required fast data processing and update rate.

V. MODIFICATIONS OF MEASUREMENT TECHNIQUE FOR OWME

The OWME system requires continuous wave measurements and real time data processing. Therefore the standard WaMoS II software modules had to be revised to

ensure fast and secure data storage and analysis. This was achieved by separating the raw data acquisition and data analysis while fully integrating the inversion module into the analysis module.

When using a standard PC, the various filters and transforms involved in the data analysis needed too much time when applied to full radar images. In extreme cases, the inversion of the radar images took more than one minute, i.e. the computation time would have been in the same order as the prediction horizon for the whole system.

One option was to reduce the observed area and by this minimize the amount of data that needed to be processed, thus reducing the entire processing time considerably. This approach had two advantages: Only those waves, that would approach the vessel within the next minutes will have an impact on its movement, while waves passing by are of no interest for the prediction.

Therefore only the part of the whole radar image pointing in the waves was chosen. By this only those waves containing relevant information for the purpose of vessel motion prediction were considered. In addition, those waves that are

approaching the radar show the strongest backscatter, which yields the clearest raw signal and thereby most accurate wave elevation maps.

Due to the fact, that the wave information from the whole area is in principle available, an automatic tool was designed to select a suitable sub area and restrict the analysis of the whole image to a smaller 'window.' When facing multi-modal sea states, more than one of those areas might be needed. Therefore, in the OWME wave measurement software, a recursive window positioning tool was implemented.

The location of the sub area was identified by looking at the statistical wave parameters available from the WaMoS II standard analysis. The positioning algorithm used the peak wave direction of the actual spectral measurement to select the window position for the next calculation cycle. As all recursive procedures might become unstable with time, this selection was cross checked using a fixed 'control window'.

Figure 3 shows an example of the window placement and gives an impression of the results of this procedure. The shown radar image covers a full 360 circle around the radar

antenna that is located in the center. The radius of this example image is about 2 km, the wave signatures are clearly visible. Within the example radar image, two frames are marked. The red frame represents the automatically placed analysis area (into peak wave direction), while the green control window was fixed pointing over the vessels bow. Both

analysis windows have a size of $960 \times 960 \text{ km}^2$ (128×128 pixels), and were placed at a distance of 690m (referring to the inner boundary) from the antenna.

For both windows, the wave spectra were calculated. A 30 minute average of the peak wave direction is used to determine the position of the analysis window for the next measurement cycle. The sea surface elevations are only calculated for the red analysis window. The map of sea surface elevation in In Figure 3 is color coded, blue indicating wave troughs, wave crests are displayed in red. In this example, the individual waves are clearly visible. The orientation of the wave fronts show, that the wave field is approaching the vessel. The sequence of these maps contains the unambiguous wave travel direction.

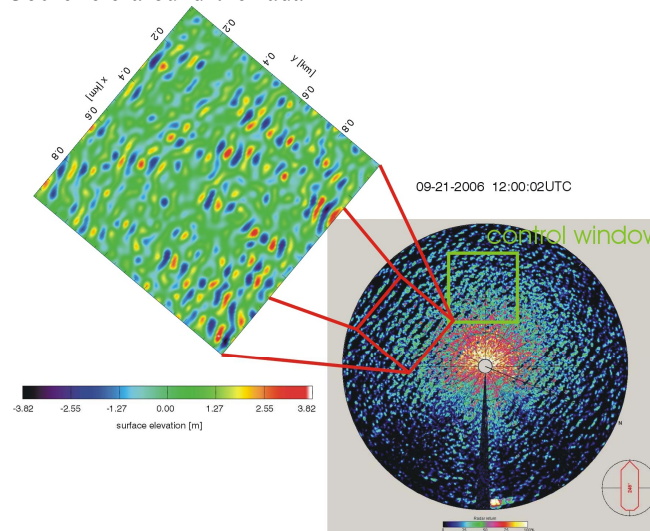


Figure 3: The window positioning algorithms focuses the wave analysis to areas with approaching waves.

VI. REAL TIME TESTING AND DATA VERIFICATION IN OWME

Once the wave surface elevations at the remote location ahead of the vessel were known, a wave propagation model was required to predict the wave surfaces at the location of the vessel. The Ship Hydromechanics department of Delft University of Technology developed a linear wave propagation model based on the dispersion relation of waves. This method is a straightforward superposition of cosine waves with different frequencies traveling in different directions [3].

The OWME concept was verified against scale model tests both in long crested and short crested waves. Extensive short crested model tests were conducted in MARIN's Seakeeping

& Manoeuvring Basin which measures $170 \times 40 \times 6 \text{ m}$. In this basin, a sea area of $1.2 \times 1.2 \text{ nm}$ including the vessel could be modeled at scale 1:70. The model tests proved the feasibility of the concept and the accuracy of the wave propagation and vessel motion prediction model. The modeling approach will not be further discussed in this paper and can be found in Ref [3].

For the final validation and demonstration of the developed OWME system, dedicated sea trials have been performed in September 2008 offshore Norway. The vessel which was selected for these offshore trials was the light well intervention vessel Island Frontier (IFO). This vessel is operated by Island Offshore and was at the time working for StatoilHydro at the Gulfaks-field. All activities on board were

conducted in close co-operation with Seaflex, Island Offshore and StatoilHydro.

For the trial the IFO was equipped with a WaMoS II wave recording system, a down looking wave radar underneath the helideck at the bow of the vessel and an advanced on board network for data acquisition and storage. Also compact motion sensor units measuring the vessel motions in 6 DOF were deployed. These sensor systems were tied into the data acquisition system. This advanced monitoring system comprised a direct link with the internet which enabled remote review of the measurements and control of the monitoring software. In this way extensive data sets were recorded prior to the actual trials and parallel to the development of the OWME system. These data sets were used to develop and test the WaMoS wave elevation data processing and the ship motion forecasting.

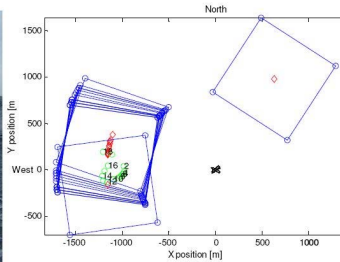
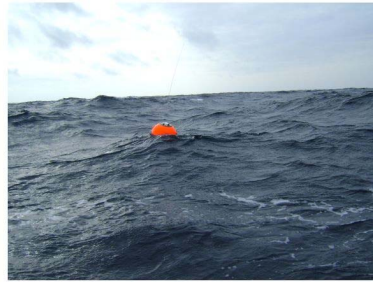


Figure 4: Drifting wave rider buoy and radar analysis window are shifted to the same positions. The exact positions of both sensors and the timing is very relevant to carry out any data comparisons.

When assessing H_s computed by the various systems, a very close match was obtained. However the important next step for OWME was a deterministic comparison of the sea surface elevations as shown in Figure 5. The correlation between the buoy and WaMoS sea surface elevations showed reasonable results which gave confidence to proceed with the overall OWME approach

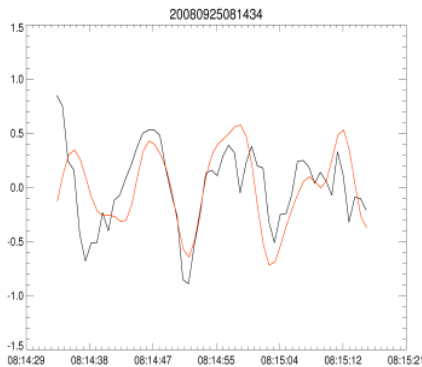


Figure 5: Comparison between wave elevation derived from WaMoS (red) and buoy (black).

For the final trial, one buoy was deployed and moored in 150 m water depth in the center of the window of the WaMoS wave detection area. The wave elevation measured by this buoy enables a deterministic verification of the WaMoS wave elevations as well as deterministic time domain test of the wave propagation model using the wave buoy data as input and comparing the output with the wave elevation measured by the radar level gauge on the bow of the vessel.

It should be noted that due to its flexible mooring and the changing wind, wave and current conditions, the wave buoy did not maintain position but exhibited a track as shown in Figure 4. At the same time the WAMOS window also moved in time due to the automatic control of this window in WAMOS on the basis of the recorded dominant wave direction. This gives an idea about the challenges, both for timing and co-location when validating these high resolution sea surface elevation maps with one in-situ mooring..

Utilizing the wave elevations from WaMoS as input for the wave propagation, the output of the propagation model can be compared to the measured wave elevations by the Down Looking Radar (DLR) at the bow of the vessel. By measuring the remote wave elevations with a directional wave rider buoy, the local waves with a level gauge radar and the vessel motions by means of a motion sensor unit, a solid reference data set was obtained to validate the system. By this, each of the components of the OWME concept i.e. the wave sensing, the wave propagation and the vessel motion prediction could be tested separately as well as in combination.

The final test was to compare the advance predicted vessel motions with the actual measured vessel motions. Predictions of the vessel motions were made for 42, 60, 90 and 120 seconds ahead and compared with the actual vessel motions as measured (Figure 6). The general outcome for all four forecasting periods was, that despite significant deviations in the actual amplitudes and phasing, the envelope of the motions was predicted correctly.

The below results show that the OWME system is capable of predicting quiescent periods of vessel motions up to two

minutes in advance and can thus, contribute to the workability of offshore operation in otherwise limiting sea states.

It is however noted that the OWME system was developed for and is so far only tested in mild sea states.

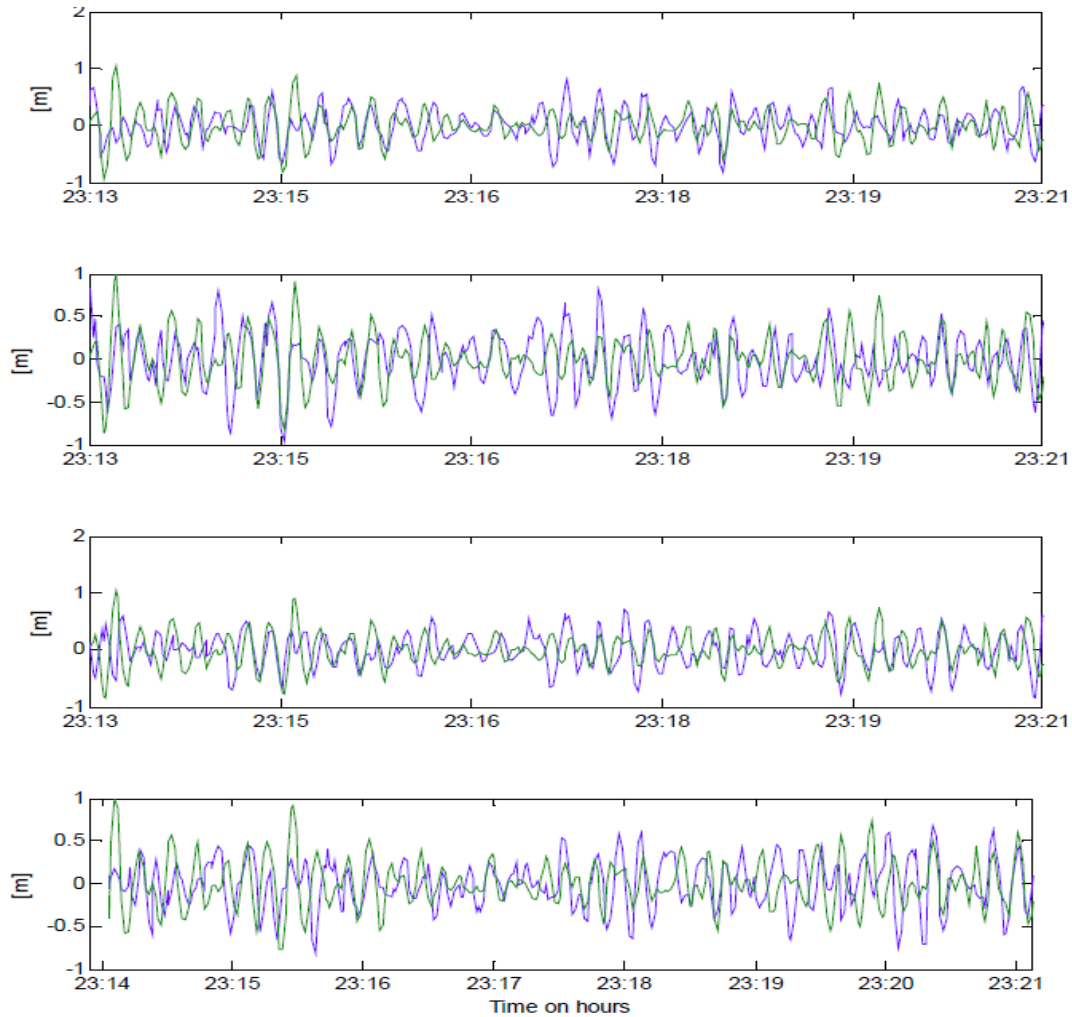


Figure 6: Vessel heave motion predicted 42, 60, 90 and 120 seconds in advance by OWME system compared with the measured on board heave motion (trials on an Offshore Support Vessel at Gulfaks field, September 2008). The green lines represent the measured heave motions, the blue lines the predicted motions.

VII. OUTLOOK

With these promising results, the OWME partners lead by MARIN plan to continue the work on the OWME concept, refine and enhance it, to make offshore operations safer and more efficient. At the same time, OceanWaveS will continue the verification of the sea surface elevation data within the coming years in a large experiment off the coast of California.

The technology is in particular relevant for smaller vessels of the type that are increasingly undertaking operations such as well intervention, drilling, survey and installation,

operations for which safety and workability are paramount. The concept is also of interest for trading ships to avoid severe wave impacts and excessive motions by warning for severe incident wave elevations and excessive motions and loads.

ACKNOWLEDGMENT

The OWME Joint Industry Project was lead by MARIN and conducted as Eureka project with financial support from the Dutch Ministry of Economic Affairs. The participating companies in OWME were StatoilHydro, Total, SBM, Seaflex, Sirehna, TU-Delft, OceanWaveS and MARIN.

REFERENCES

- [1] Behrens,A & Günther,H. (2008);” Operational wave prediction of extreme storms in Northern Europe”, Nat Hazards DOI 10.1007/s11069-008-9298-3.
- [2] Hessner, K. & Reichert, K. (2007) “Sea surface elevation maps obtained with a nautical X-Band radar – Examples from WaMoS II stations”, 10th International Workshop on Wave Hindcasting and Forecasting, Oahu, Hawaii.
- [3] Naaijen,P., van Dijk,R., Huijsmans, R.H.M, El Mouhandiz, A.A. and Dannenberg, J. (2009); “Real Time Estimation of Ship Motions in Short Crested Seas”; OMAE2009-79366, May 2009, Honolulu, Hawaii.
- [4] Nieto, J.C. Rodríguez G.R., Hessner K., González P.I., 2004: Inversion of Marine Radar Images for Surface Wave Analysis. *Journal of Atmospheric and Oceanic Technology.*, 21, 1291-1300.
- [5] Ziemer F., Günther H. (1994) A system to monitor ocean wave fields. Proc. 2nd Int. Conf. Air-Sea Interaction Meteorol. Oceanogr. Coastal Zone,, Lisboa, September 22-27.