


PART NUMBER SYSTEM

Example :

MINK 6 - CCP/L - PBOF - R/A - P - N/W

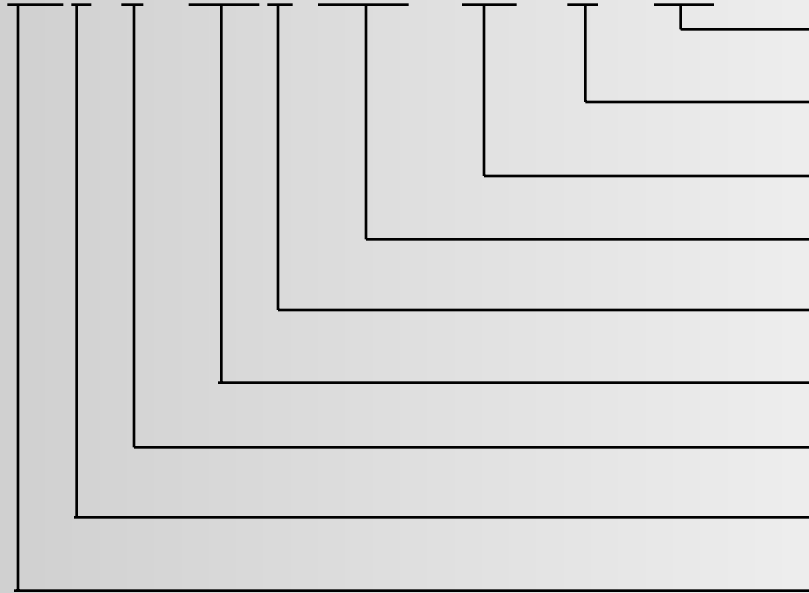

With Nut/Washer (Optional)

With Pigtails (Optional)

Right Angle (Optional)

Pressure Balanced, Oil-filled (Optional)

Long Shell*

Cable Connector Plug

Number of Contacts

Shell Size

Miniature Series (MINI-CON)

BCR	Bulkhead Connector Receptacle
FCR	Flange Connector Receptacle
CCR	Cable Connector Receptacle
CCP	Cable Connector Plug
FI	Field Installable
CIR	Connector Insert Receptacle (male insert only, fits into BCR/CCR/FCR shell)
CIP	Connector Insert Plug (female insert only, fits into CCP shell)
DSR	Dummy Sealing Receptacle
DSP	Dummy Sealing Plug
PSR	Plastic Splashproof Receptacle
PSP	Plastic Splashproof Plug

*WHAT THE 'L' IN THE PART MEANS

Basically, the MINI-CON connectors are made in two different lengths which we refer to as Regular (or standard), and Long. The long lengths are always necessary when the electrical insert for that given connector contains one or more contacts which are #16 AWG or larger, coaxial or Fiber Optic channels. If the electrical insert contains contacts which are all smaller than #16 AWG, the Regular length connector shell is utilized. The part numbers ending in "L", denote long shells.

When mating connectors, use only those with the same style, length and pin configurations.