
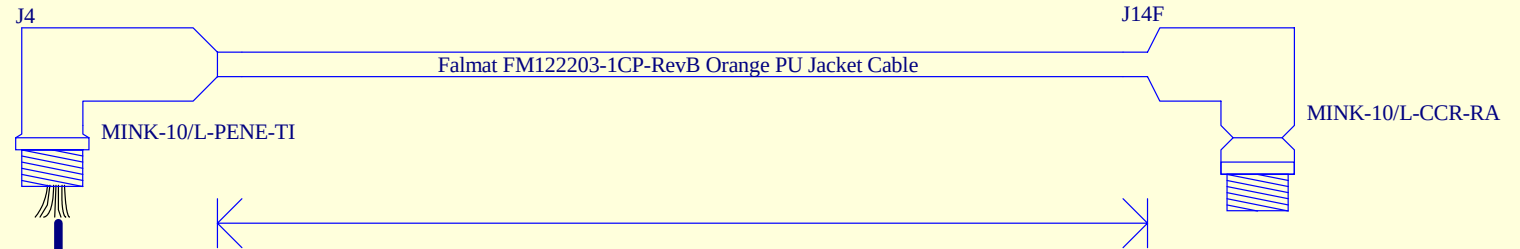


MVC to Tether Bus Cable

Connects to MVC

Connects to Tether Bus

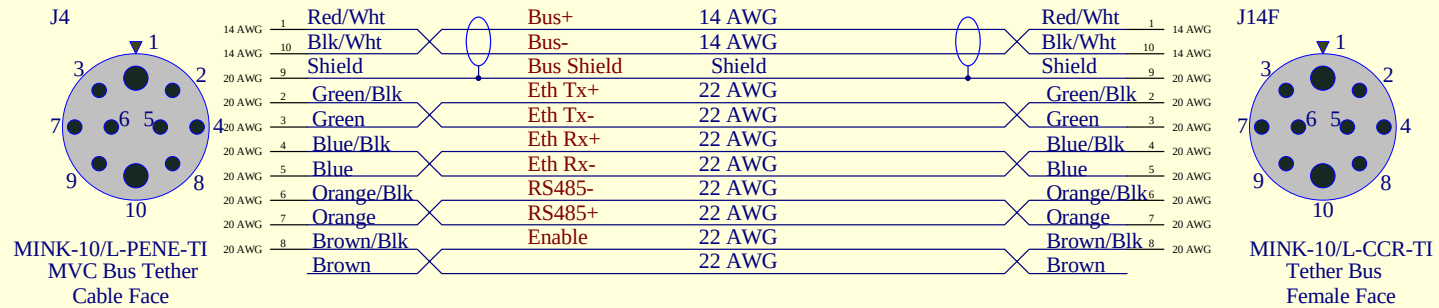

14 AWG	Bus+	1
14 AWG	Bus-	10
20 AWG	Bus Shield	9
20 AWG	Eth Tx+	2
20 AWG	Eth Tx-	3
20 AWG	Eth Rx+	4
20 AWG	Eth Rx-	5
20 AWG	Bus+ Sense	6
20 AWG	Bus- Sense	7
20 AWG		8

Notes:

1. Use drain for 14AWG STP shield for pin 9 connection
2. Cable length measurement is along the exposed cable section. Cable is pre-cut to length by customer, including 6" extra for R/A termination and 3" extra for straight termination

M O B A R I		Title: *	
		Engineer: *	
		Checked: *	
Part No.: *	Rev: *		
Sheet: * of *	Date: 4/13/2006		
polarbear.dorado@MultibeamSchematics\SystemLevel-Wiring\Generic Hookup.SCHDOC			