


## GETTING STARTED GUIDE

# NI 9229

4 AI,  $\pm 60$  V, 24 Bit, 50 kS/s/ch Simultaneous

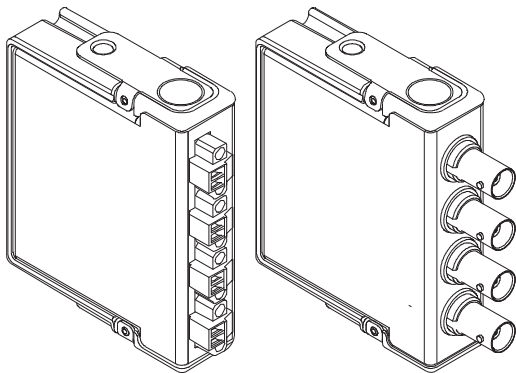

This document explains how to connect to the NI 9229.



**Note** Before you begin, complete the software and hardware installation procedures in your chassis documentation.



**Note** The guidelines in this document are specific to the NI 9229. The other components in the system might not meet the same safety ratings. Refer to the documentation for each component in the system to determine the safety and EMC ratings for the entire system.

## Safety Guidelines

---

Operate the NI 9229 only as described in this document.



**Caution** Do not operate the NI 9229 in a manner not specified in this document. Product misuse can result in a hazard. You can compromise the safety protection built into the product if the product is damaged in any way. If the product is damaged, return it to NI for repair.



**Hazardous Voltage** This icon denotes a warning advising you to take precautions to avoid electrical shock with the NI 9229 with screw terminal.

## NI 9229 with Screw Terminal Safety Voltages

Connect only voltages that are within the following limits:

---

### Isolation

---

#### Channel-to-channel

---

|            |                                   |
|------------|-----------------------------------|
| Continuous | 250 Vrms, Measurement Category II |
|------------|-----------------------------------|

---

|           |                                                      |
|-----------|------------------------------------------------------|
| Withstand | 1,390 V, verified by a 5 s dielectric withstand test |
|-----------|------------------------------------------------------|

---

#### Channel-to-earth ground

---

|            |                                   |
|------------|-----------------------------------|
| Continuous | 250 Vrms, Measurement Category II |
|------------|-----------------------------------|

---

|           |                                                      |
|-----------|------------------------------------------------------|
| Withstand | 2,300 V, verified by a 5 s dielectric withstand test |
|-----------|------------------------------------------------------|

---

Division 2 and Zone 2  
hazardous locations  
applications<sup>1</sup>

60 VDC, Measurement  
Category I

---

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.



**Caution** If using in Division 2 or Zone 2 hazardous locations applications, do not connect the NI 9229 with

---

<sup>1</sup> Channel-to-channel and channel-to-earth ground

screw terminal to signals or use for measurements within Measurement Categories II, III, or IV.

Measurement Category II is for measurements performed on circuits directly connected to the electrical distribution system. This category refers to local-level electrical distribution, such as that provided by a standard wall outlet, for example, 115 V for U.S. or 230 V for Europe.



**Caution** Do not connect the NI 9229 with screw terminal to signals or use for measurements within Measurement Categories III or IV.

## NI 9229 with BNC Safety Voltages

Connect only voltages that are within the following limits:

---

### Isolation

---

---

#### Channel-to-channel

---

Continuous

60 VDC, Measurement Category I

Withstand

1,000 V, verified by a 5 s dielectric withstand test

---

## Channel-to-earth ground

|            |                                                      |
|------------|------------------------------------------------------|
| Continuous | 60 VDC, Measurement Category I                       |
| Withstand  | 1,000 V, verified by a 5 s dielectric withstand test |

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.



**Caution** Do not connect the NI 9229 with BNC to signals or use for measurements within Measurement Categories II, III, or IV.

## Safety Guidelines for Hazardous Voltages

You can connect hazardous voltages only to the NI 9229 with screw terminal. Do not connect hazardous voltages to the NI 9229 with BNC.

If hazardous voltages are connected to the device, take the following precautions. A hazardous voltage is a voltage greater than 42.4 Vpk voltage or 60 VDC to earth ground.



**Caution** Ensure that hazardous voltage wiring is performed only by qualified personnel adhering to local electrical standards.



**Caution** Do not mix hazardous voltage circuits and human-accessible circuits on the same module.



**Caution** Ensure that devices and circuits connected to the module are properly insulated from human contact.



**Caution** When module terminals are hazardous voltage LIVE ( $>42.4$  Vpk/60 VDC), you must ensure

that devices and circuits connected to the module are properly insulated from human contact. You must use the NI 9971 connector backshell kit to ensure that the terminals are not accessible.

## Safety Guidelines for Hazardous Locations

The NI 9229 is suitable for use in Class I, Division 2, Groups A, B, C, D, T4 hazardous locations; Class I, Zone 2, AEx nA IIC T4 and Ex nA IIC T4 hazardous locations; and nonhazardous locations only. Follow these guidelines if you are installing the NI 9229 in a potentially explosive environment. Not following these guidelines may result in serious injury or death.



**Caution** Do not disconnect I/O-side wires or connectors unless power has been switched off or the area is known to be nonhazardous.



**Caution** Do not remove modules unless power has been switched off or the area is known to be nonhazardous.



**Caution** Substitution of components may impair suitability for Class I, Division 2.



**Caution** For Division 2 and Zone 2 applications, install the system in an enclosure rated to at least IP54 as defined by IEC/EN 60079-15.



**Caution** For Division 2 and Zone 2 applications, install a protection device between the input signal and the input terminal. The device must clamp all voltage sources to no more than 40% above their rated value or within 84 VDC to earth ground if there is a transient overvoltage condition.



**Caution** For Division 2 and Zone 2 applications, connected voltage sources must be within 60 VDC to earth ground.



**Caution** For Division 2 and Zone 2 applications, connected signals must be within the following limits.

Capacitance

0.01  $\mu$ F max

---

## Special Conditions for Hazardous Locations Use in Europe and Internationally

The NI 9229 has been evaluated as Ex nA IIC T4 Gc equipment under DEMKO Certificate No. 07 ATEX 0626664X and is

IECEX UL 14.0089X certified. Each NI 9229 is marked  II 3G and is suitable for use in Zone 2 hazardous locations, in ambient temperatures of  $-40\text{ }^{\circ}\text{C} \leq T_a \leq 70\text{ }^{\circ}\text{C}$ . If you are using the NI 9229 in Gas Group IIC hazardous locations, you must use the device in an NI chassis that has been evaluated as Ex nC IIC T4, Ex IIC T4, Ex nA IIC T4, or Ex nL IIC T4 equipment.



**Caution** You must make sure that transient disturbances do not exceed 140% of the rated voltage.



**Caution** The system shall only be used in an area of not more than Pollution Degree 2, as defined in IEC 60664-1.



**Caution** The system shall be mounted in an ATEX/IECEX-certified enclosure with a minimum ingress protection rating of at least IP54 as defined in IEC/EN 60079-15.



**Caution** The enclosure must have a door or cover accessible only by the use of a tool.

# Electromagnetic Compatibility Guidelines

---

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) stated in the product specifications. These requirements and limits provide reasonable protection against harmful interference when the product is operated in the intended operational electromagnetic environment.

This product is intended for use in industrial locations. However, harmful interference may occur in some installations, when the product is connected to a peripheral device or test object, or if the product is used in residential or commercial areas. To minimize interference with radio and television reception and prevent unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

Furthermore, any changes or modifications to the product not expressly approved by National Instruments could void your authority to operate it under your local regulatory rules.



**Caution** To ensure the specified EMC performance, operate this product only with shielded cables and accessories.



**Caution** Electrostatic Discharge (ESD) can damage the NI 9229 with screw terminal. To prevent damage, use industry-standard ESD prevention measures during installation, maintenance, and operation.



**Caution** To ensure the specified EMC performance for the NI 9229 with BNC, you must install clamp-on ferrite beads (NI part number 782801-01) in accordance with the product installation instructions. Refer to the NI 9229 product page on [ni.com](https://ni.com) for purchasing information about clamp-on ferrite beads.

## Cable Requirements for EMC Compliance


Select and install cables for the NI 9229 with BNC in accordance with the following requirements:

- Install a clamp-on ferrite bead (NI part number 782801-01) on the BNC cable for each channel that you are connecting to on the NI 9229 with BNC.
- Clamp-on ferrites must be connected to the BNC cable as close to the module as possible with a full turn as shown in

the following figure. Placing the ferrite elsewhere on the cable noticeably impairs its effectiveness.

**Figure 1.** Installing a Ferrite

---



## Special Conditions for Marine Applications

Some products are Lloyd's Register (LR) Type Approved for marine (shipboard) applications. To verify Lloyd's Register certification for a product, visit [ni.com/certification](http://ni.com/certification) and search for the LR certificate, or look for the Lloyd's Register mark on the product.



**Caution** In order to meet the EMC requirements for marine applications, install the product in a shielded

enclosure with shielded and/or filtered power and input/output ports. In addition, take precautions when designing, selecting, and installing measurement probes and cables to ensure that the desired EMC performance is attained.

## Preparing the Environment

---

Ensure that the environment in which you are using the NI 9229 meets the following specifications.

|                                                         |                 |
|---------------------------------------------------------|-----------------|
| Operating temperature<br>(IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 70 °C |
|---------------------------------------------------------|-----------------|

---

|                                        |                                    |
|----------------------------------------|------------------------------------|
| Operating humidity<br>(IEC 60068-2-78) | 10% RH to 90% RH,<br>noncondensing |
|----------------------------------------|------------------------------------|

---

|                  |   |
|------------------|---|
| Pollution Degree | 2 |
|------------------|---|

---

|                  |         |
|------------------|---------|
| Maximum altitude | 2,000 m |
|------------------|---------|

---


Indoor use only.



**Note** Refer to the device datasheet on [ni.com/manuals](https://ni.com/manuals) for complete specifications.

# NI 9229 Pinout

---

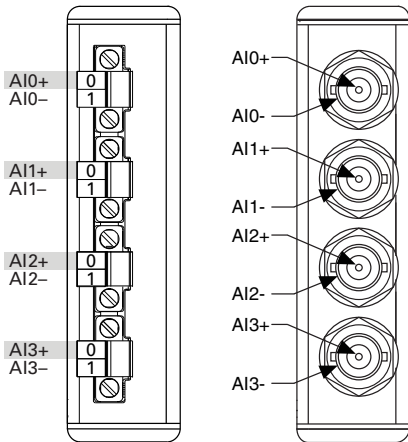


**Table 1.** Signal Descriptions

| Signal | Description                             |
|--------|-----------------------------------------|
| AI+    | Positive analog input signal connection |
| AI-    | Negative analog input signal connection |

## Grounded Connections


---



Make sure the voltage on the AI+ and AI- connections are in the channel-to-earth safety voltage range to ensure proper operation.

# Floating Connections

---



## NI 9229 Connection Guidelines

---

- Make sure that devices you connect to the NI 9229 are compatible with the module specifications.
- You must use 2-wire ferrules to create a secure connection when connecting more than one wire to a single terminal on the NI 9229 with screw terminal.

## Wiring for High-Vibration Applications

If your application is subject to high vibration, NI recommends that you follow these guidelines to protect connections to the NI 9229 with screw terminal:

- Use ferrules to terminate wires to the detachable connector.
- Use the NI 9971 backshell kit.

## Overvoltage Protection

---


The NI 9229 provides overvoltage protection for each channel.



**Note** Refer to the device datasheet on [ni.com/manuals](https://ni.com/manuals) for more information about overvoltage protection.

# Where to Go Next

---

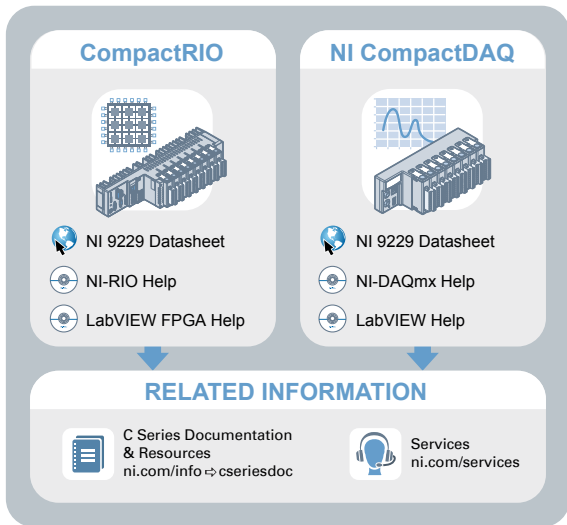

Located at [ni.com/manuals](http://ni.com/manuals)



Installs with the software

## Worldwide Support and Services

---

The NI website is your complete resource for technical support. At [ni.com/support](https://ni.com/support), you have access to everything from troubleshooting and application development self-help resources to email and phone assistance from NI Application Engineers.

Visit [ni.com/services](https://ni.com/services) for NI Factory Installation Services, repairs, extended warranty, and other services.

Visit [ni.com/register](https://ni.com/register) to register your NI product. Product registration facilitates technical support and ensures that you receive important information updates from NI.

A Declaration of Conformity (DoC) is our claim of compliance with the Council of the European Communities using the manufacturer's declaration of conformity. This system affords the user protection for electromagnetic compatibility (EMC) and product safety. You can obtain the DoC for your product by visiting [ni.com/certification](https://ni.com/certification). If your product supports calibration, you can obtain the calibration certificate for your product at [ni.com/calibration](https://ni.com/calibration).

NI corporate headquarters is located at 11500 North Mopac Expressway, Austin, Texas, 78759-3504. NI also has offices located around the world. For telephone support in the United States, create your service request at [ni.com/support](https://ni.com/support) or dial 1 866 ASK MYNI (275 6964). For telephone support outside the United States, visit the *Worldwide Offices* section of [ni.com/niglobal](https://ni.com/niglobal) to access the branch office websites, which provide up-to-date contact information, support phone numbers, email addresses, and current events.

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2007—2016 National Instruments. All rights reserved.