

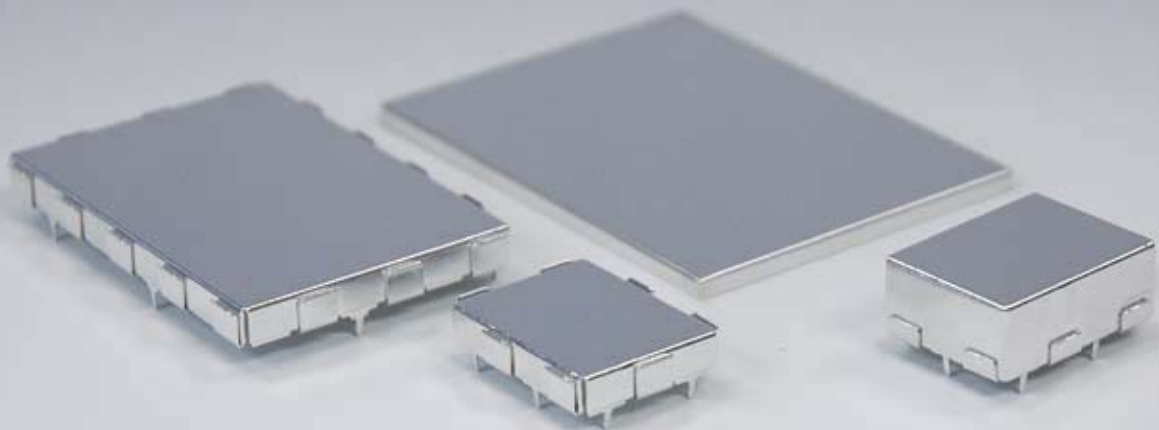









10 - CBS Series					
Black = inches Red = mm					
STYLE	FIG.	A HEIGHT	B PIN SPACING	C STANDOFFS	D PIN LENGTH
10-CBS surface mount	1	.13 (3,30)	none	none	none
14-CBS	5	.13 (3,30)	1.0 (25,4)	none	.05 (1,27)
14R-CBS	3	.13 (3,30)	.50 (12,7)	none	.10 (2,54)
14RA-CBS	3	.13 (3,30)	.50 (12,7)	none	.05 (1,27)
18R-CBS	3	.13 (3,30)	.50 (12,7)	none	.13 (3,30)

20 - CBS Series					
Black = inches Red = mm					
STYLE	FIG.	A HEIGHT	B PIN SPACING	C STANDOFFS	D PIN LENGTH
20-CBS surface mount	1	.200 (5,08)	none	none	none
20S-CBS surface mount	2	.200 (5,08)	.50 (12,7) pad spacing	none	.21L (5,33) .075W (1,90)
21L-CBS	4	.225 (5,72)	.50 (12,7)	.025 (.63)	.15 (3,81)
21M-CBS	4	.225 (5,72)	.50 (12,7)	.025 (.63)	.13 (3,30)
21-CBS	4	.225 (5,72)	.50 (12,7)	.025 (.63)	.10 (2,54)
22-CBS	5	.200 (5,08)	1.0 (25,4)	none	.10 (2,54)
23-CBS	4	.250 (6,35)	.50 (12,7)	.050 (1,27)	.10 (2,54)
24-CBS	3	.200 (5,08)	.50 (12,7)	none	.10 (2,54)
24S-CBS	3	.200 (5,08)	.50 (12,7)	none	.05 (1,27)
25-CBS	6	.225 (5,72)	1.0 (25,4)	.025 (.63)	.10 (2,54)
29-CBS	3	.200 (5,08)	.50 (12,7)	none	.13 (3,30)

- NOTES
- Drawings in figures 1-6 are not to scale; see chart for sizing
 - Standard material .015" (.38) pre-tin plated steel
 - Other cover heights available, consult factory
 - Standard cover height: .115" (2,92) 10-CBS
.185" (4,70) 20-CBS

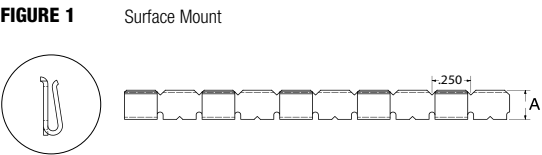


CBS 10 and 20 Series Configuration

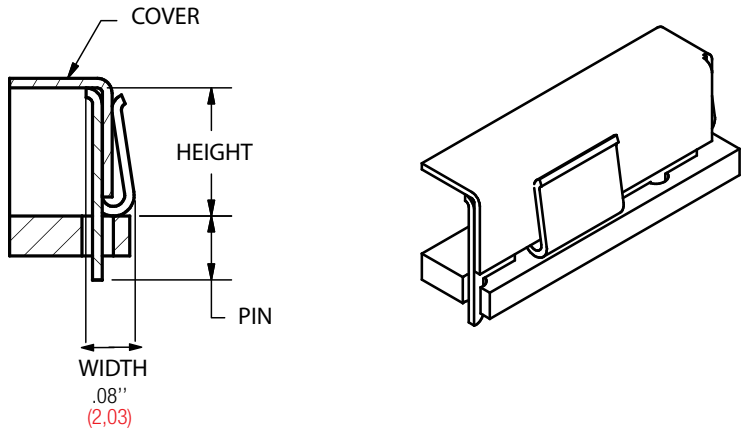


AVAILABLE HEIGHTS:
10 SERIES- .13" TO 2.0" (3,3 TO 50,8) 20 SERIES- .20" TO 2.0" (5,08 TO 50,8)
Recommended hole size: .050" (1,27)

Ventilation Patterns


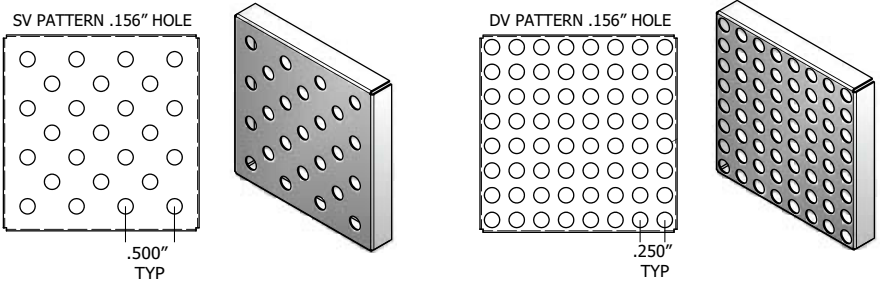


Single density and double density ventilation holes available upon request.
SV/DV (Standard) = .156" dia. SV2/DV2 (Alternate) = .08" dia.

Mounting Hole Patterns (10 and 20 series)

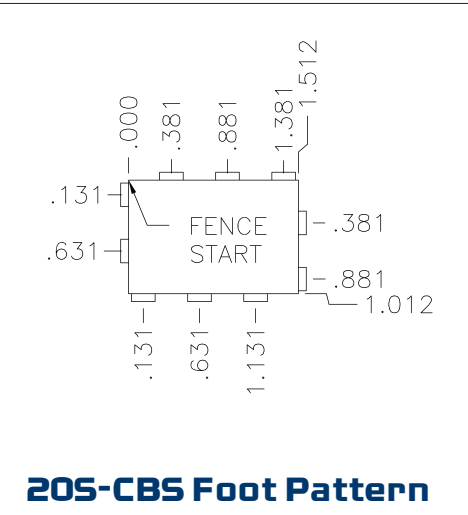

Pin pattern viewed from top of shield. Consult factory for pin patterns for your application

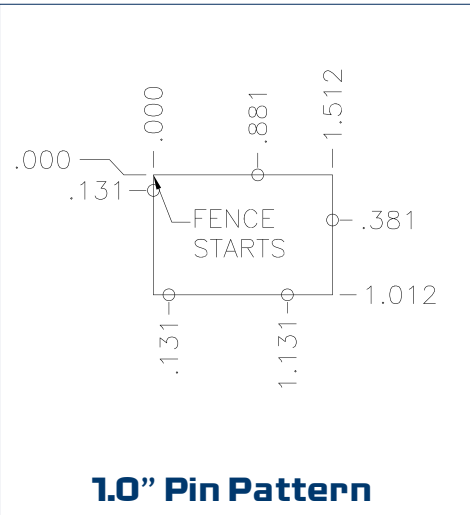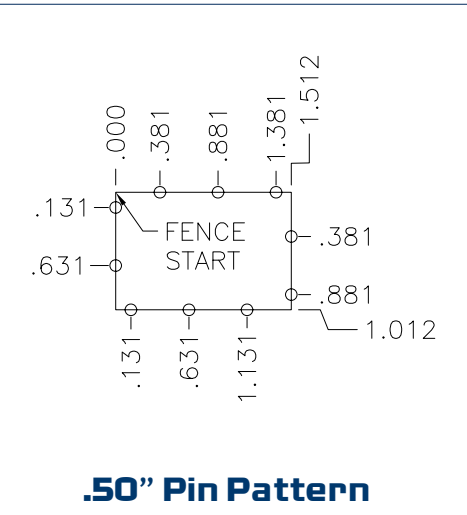

10 and 20 Series Specs

- Sizes:** .50" x .50" to 12" x 24" (.25" increments)
Shapes: Squares, rectangles and odd shapes in .25" increments
Heights: .13" to 2.00"
Mounting Pins: .25", .50" or 1.00" spacing
Surface Mount: Available for all 10 and 20 series CBS
Std Material: .015" (.38) pre-tin plated steel
Cover Retention: 1.5 - 2.5 lb./linear inch
Shielding Effectiveness: up to 60 dB

Standard Options

- Formed fence and cover - unassembled (F)
- Assembled fence and cover (A)
- Flat fence and formed cover (U)
- Phosphorous bronze (P), alloy 770 (N)
- Ventilation holes (SV 15% or DV 30%)
- Dimples for improved retention (D)

Ordering a CBS is Easy

1. Select your style number - "**21-CBS**"
2. Choose standard options listed above - "**21-CBSFNSV**"
3. Specify your width in .25" increments from .50" to 12.00" - "**21-CBSFNSV-2.5**"
4. Specify your length in .25" increments from .50" to 24.00" - "**21-CBSFNSV-2.5x4.5**"
5. Specify your height from board to inside cover from .13" to 2.00" "**21-CBSFNSV-2.5x4.5x.225**"