

WARNING!
ALL THE INFORMATION CONTAINED IN THIS
DOCUMENT OR DISCLOSED BY IT IS THE PROPERTY
OF TADIRAN LTD. AND MAY NOT BE USED WITHOUT
TADIRAN'S WRITTEN AUTHORIZATION.


REV	Δ	DESCRIPTION	CHNGD SHEET	E.C.N	DATE	DRAWN	CHECKED
D		WIRES LONG & LABEL		-	31/10/01	HZT	DANIEL

TECHNICAL DATA @25°C


1. O.C.V. : 14.56 ÷ 14.76V
2. C.C.V. @1 A @0.5 SEC : 13.80 ÷ 14.4V
3. CAPACITY TO 12V(@6A @1% DUTY CYCLE): 800 Ah
4. MAXIMUM PULSE LENGTH (@800mA TO 12V): 200 SEC
5. OPERATING TEMPERATURE : -30°C TO +72°C
6. WEIGHT MAX. : 21 KG

NOTES

1. LABEL LETTERING SHALL INCLUDE : WARNING,
BATTERY TITLE, NOMINAL VOLTAGE & BATCH NO.
2. BATTERY SHOULD BE MOUNTED IN THE APPLICATION
IN UPRIGHT POSITION OR HORIZONTALLY.



UPRIGHT POSITION

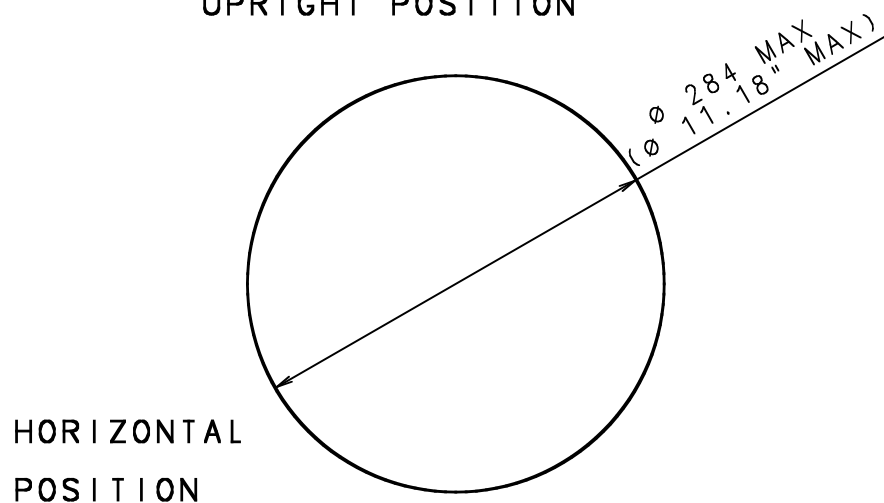

9		WIRE ORANGE	18AWG (19X30 AWG)	MT	.3	
8	61000029002	PROTECTED LABEL		PC	2	
7	61000023011	EXTERNAL SLEEVE	SHRINKABLE PVC	MT	3	
6	61000033006	P.T.C.	RAYCHEM LTP 70	PC	27	
5	61000031011	WIRE RED	18AWG (19X30 AWG)	MT	3	UL-94V-1
4	61000031012	WIRE BLACK	PVC OR PTFE JACKET	MT	3	
3	61000035002	DIODE	SCHOTTKY VSK540	PC	15	
2	61155022020	HLC-1550N		PC	12	
1	61513721510	TL-5137	SIZE : DD	PC	96	
NO.	PART NO.	NAME	DESCRIPTION	U/M	QTY	NOTES
UNLESS OTHERWISE SPECIFIED:		PROCESSING LEVEL				
ALL DIMENSIONS ARE IN MM.		TLP-94181/D/M01		OPERATION		
TOLERANCES: LINEAR : ANGLES :		BATTERY		CATALOG NO.		
ROUGHNESS:		P/N: 61941814500				
		PROD/PROJ: .				
		DRAWN HAZOUT		11/09/01		
		DESIGNED HAZOUT		11/09/01		
		CHECKED AYA		11/09/01		
		APPROVED DANIEL		12/09/01		
SCALE: N.S.		TADIRAN BATTERIES		61941814501		