




Making
DEVICE NETWORKING
easy

What is in the box?


Quick Start Guide

Digi Connect SP and Digi Connect Wi-SP

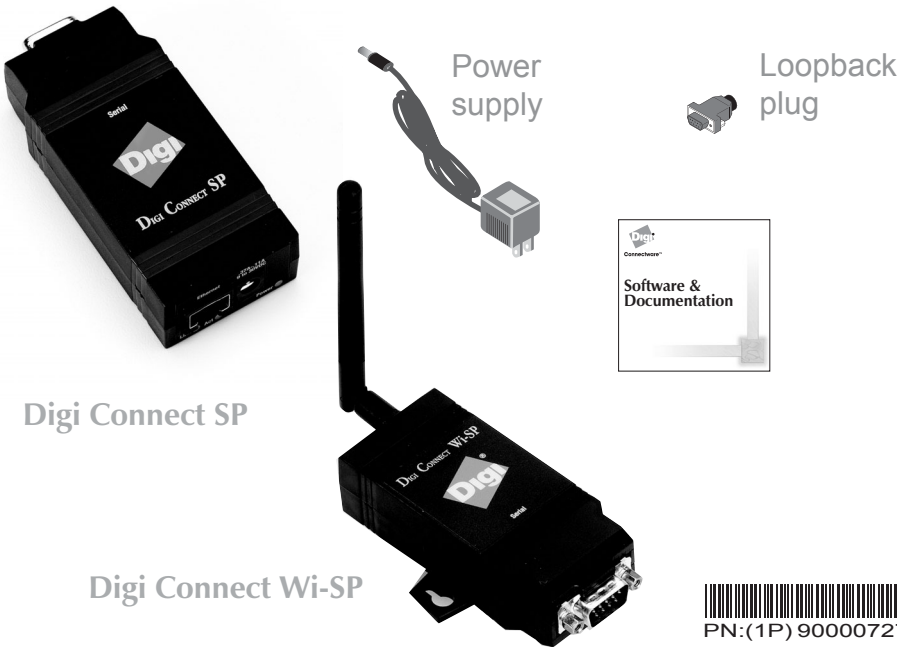

PN:(1P) 90000727 A

SET DIP SWITCH

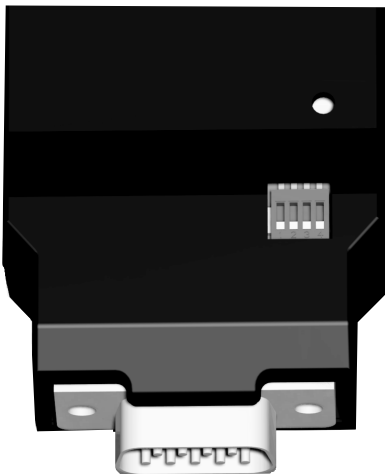


Reset switch

Set serial DIP switch according to your serial device requirements (EIA-232/422/485)


Switch Settings	Up/On Down/Off	EIA-232	EIA-422/485 Full-Duplex	EIA-485 Half-Duplex
DB-9 Pinouts	1	DCD	CTS-	Not Used
	2	RxD	RxD+	RxD+
	3	TxD	TxD+	TxD+
	4	DTR	RTS-	Not Used
	5	GND	GND	GND
	6	DSR	RxD-	RxD-
	7	RTS	RTS+	Not Used
	8	CTS	CTS+	Not Used
	9	RI	TxD-	TxD-
	Shell	GND		

*If switch 4 is up, termination resistor connected
If down, termination resistor not connected.

CONNECT HARDWARE

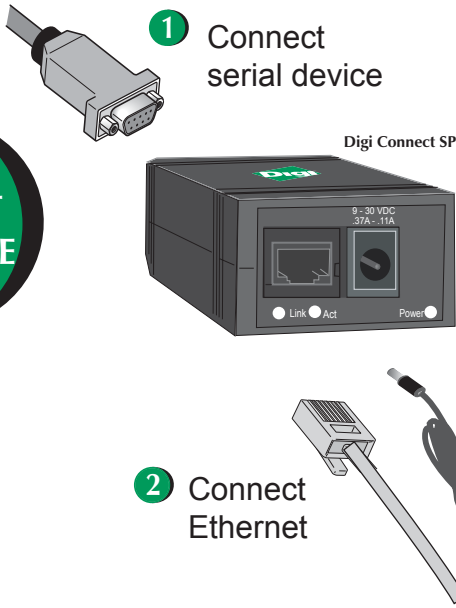

OR

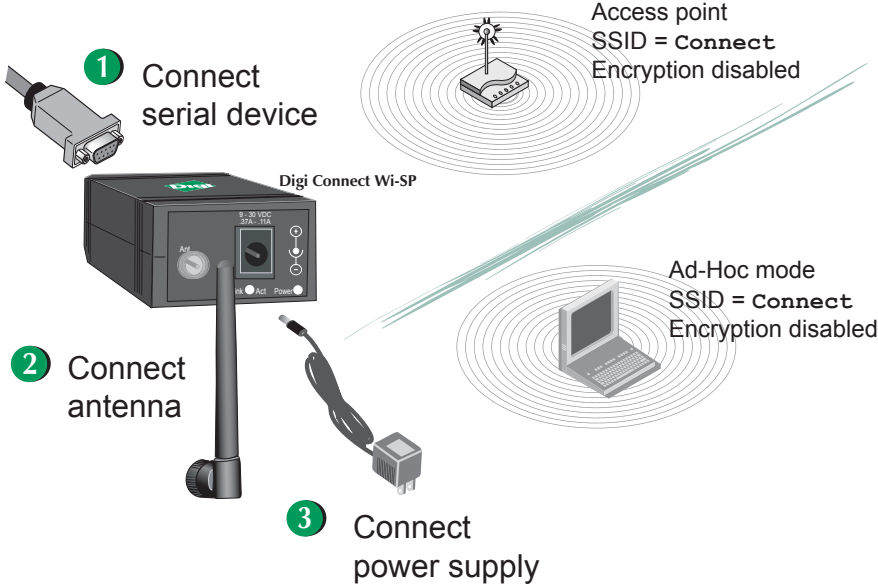

RUN WIZARD

If you prefer to configure the wireless interface via the serial port to match your existing wireless environment, go to the *Digi Connect User's Guide*, "Chapter 2, Configuring the Digi Connect Devices" before running the wizard.



Congratulations!
The Digi Connect device server is configured. Go to the User's Guide on the CD for more information.